



parker.com/gsfe

Gas Separation and Filtration Division EMEA



NEW
ANTARES PLUS-E

COMPRESSED AIR AND GAS TREATMENT PRODUCT CATALOGUE


ENGINEERING YOUR SUCCESS.

Interactive Features

Welcome to Parker's interactive guide. Accessing the information you need has never been easier. Use our interactive table of contents, thumbnails and built-in search function to find the content you need in seconds. As all of our interactive guides are optimized for mobile and desktop viewing and are connected to web resources, you can be sure to find the most up to date information anytime and anywhere.


Control Panel

Navigate, share, download and print this document using the quick links on the control panel.

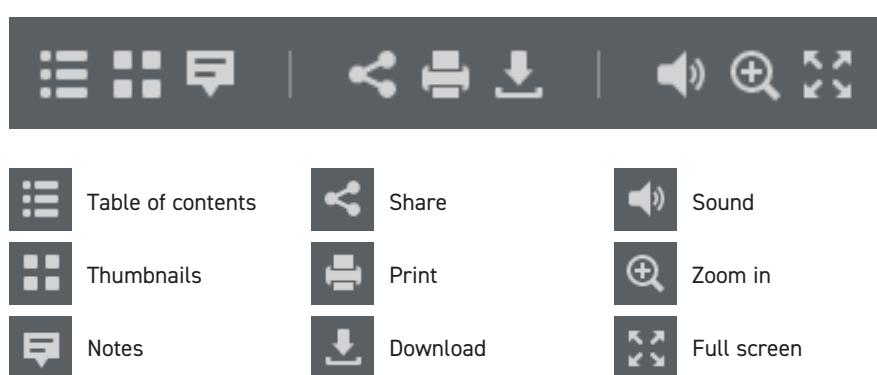

Search Function

Use the quick search to navigate directly to specific content. For example part number or product name.

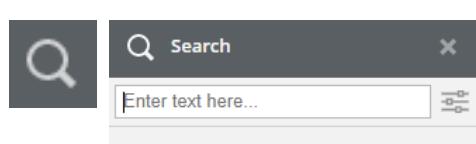



Gas Separation and Filtration Division EMEA

Parker Gas Separation and Filtration EMEA offer a range of filtration and separation solutions that are designed to meet the needs of global customers through a dedicated focus on key market sectors.

Operating from manufacturing sites in the UK, Italy, the Netherlands and the Czech Republic, the division designs, develops, manufactures and markets compressed air/gas filters and dryers, process chillers and coolers, condensate management products, breathing air purifiers, nitrogen, hydrogen and zero air on-site gas generators for many diverse markets, industries and applications where compressed air and gas purity, product quality, technological excellence and global customer support are paramount.


Parker Gas Separation and Filtration EMEA products and systems deliver a unique combination of innovation and excellence in the most demanding applications, helping engineers to maximise the productivity and profitability of their manufacturing and process operations and with a focus on delivering real and lasting value to every customer.

For over 50 years, Parker GSFE have remained instrumental in the development of both the international standards for compressed air and filter testing, and continue to work closely on new standards with governing bodies such as the British Compressed Air Society (BCAS), the International Standards Organisation (ISO), PNEUROP, and the USA Compressed Air and Gas Institute (CAGI).

Parker GSFE's goal is to dominate our chosen markets, aiming to be the number one choice supplier of compressed air / gas treatment products and on-site gas generators.

Achieving this, by recruiting the best teams, and by passionately developing our people, technology and products to help us exceed our customers' expectations, bringing new products, services and solutions to the market. We believe in, and strive to maintain, close relationships with our customers, making us their global partner of choice for compressed air and gas treatment products and services.

GSFE Compressed Air and Gas Treatment Manufacturing Locations

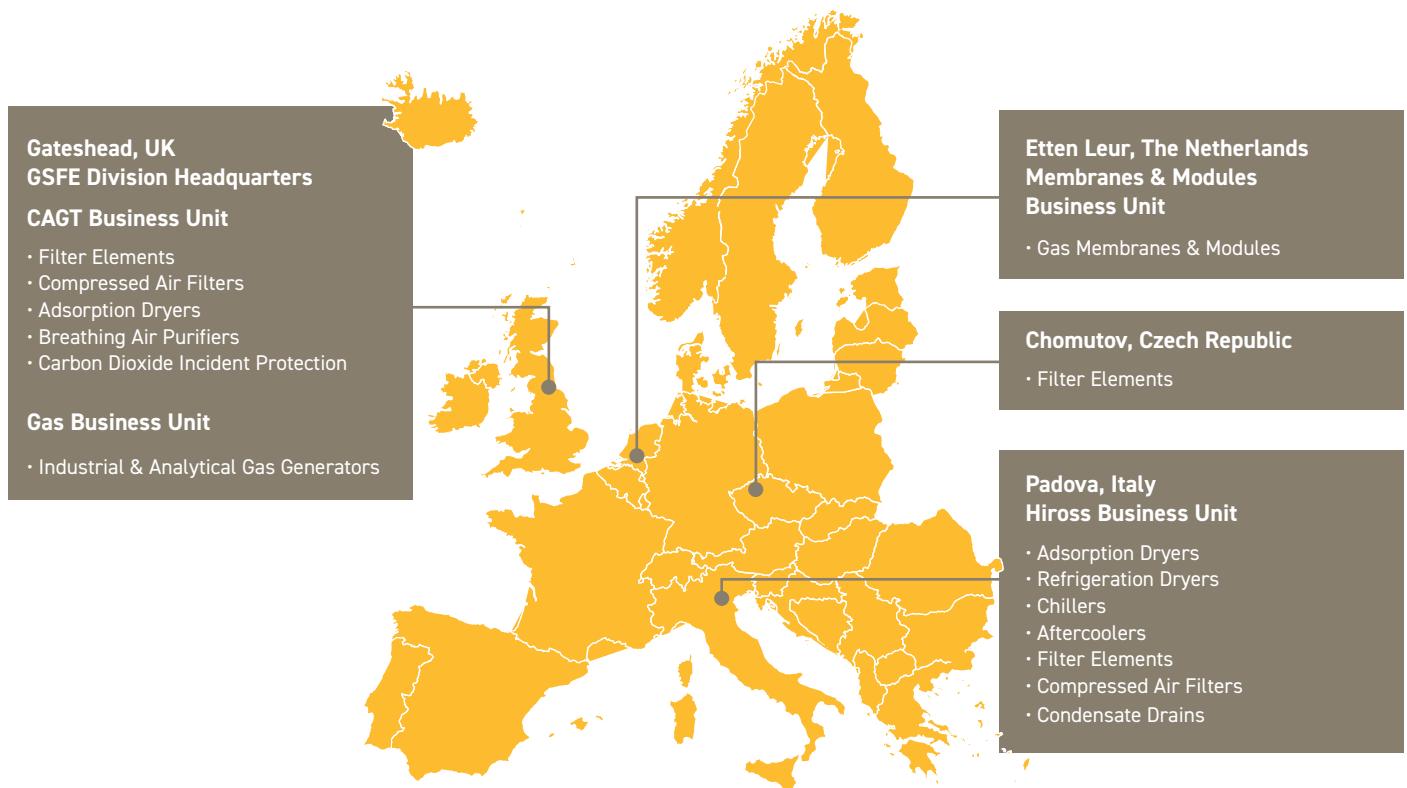

Specifying air quality (purity) in accordance with ISO8573-1:2010, the international standard for compressed air quality

ISO8573-1 is the primary document used from the ISO8573 series as it is this document which specifies the amount of contamination allowed in each cubic metre of compressed air.

ISO8573-1 lists the main contaminants as solid particulate, water and oil. The purity levels for each contaminant are shown separately in tabular form, however for ease of use, here all three contaminants are combined into one easy to use table.

ISO8573-1:2010 CLASS	Solid Particulate			Water		Oil
	Maximum number of particulates per m³		Mass Concentration mg/m³	Vapour Pressure Dewpoint	Liquid g/m³	Total Oil (aerosol, liquid and vapour)
	0.1 - 0.5 micron	0.5 - 1 micron				mg/m³
0	As specified by the equipment user or supplier and more stringent than Class 1					
1	≤ 20,000	≤ 400	≤ 10	-	≤ -70°C	-
2	≤ 400,000	≤ 6,000	≤ 100	-	≤ -40°C	-
3	-	≤ 90,000	≤ 1,000	-	≤ -20°C	-
4	-	-	≤ 10,000	-	≤ +3°C	-
5	-	-	≤ 100,000	-	≤ +7°C	-
6	-	-	-	≤ 5	≤ +10°C	-
7	-	-	-	5 - 10	-	≤ 0.5
8	-	-	-	-	-	0.5 - 5
9	-	-	-	-	-	5 - 10
X	-	-	-	> 10	-	> 10

Specifying air purity in accordance with ISO8573-1:2010

When specifying the purity of air required, the standard must always be referenced, followed by the purity class selected for each contaminant (a different purity class can be selected for each contaminant if required).

An example of how to write an air quality specification is shown below:

ISO8573-1:2010 Class 1:2:1

ISO8573-1:2010 refers to the standard document and its revision, the three digits refer to the purity classifications selected for solid particulate, water and total oil. Selecting an air purity class of 1:2:1 would specify the following air quality when operating at the standard's reference conditions:

Class 1 Particulate

In each cubic metre of compressed air, the particulate count should not exceed 20,000 particles in the 0.1 - 0.5 micron size range, 400 particles in the 0.5 - 1 micron size range and 10 particles in the 1 - 5 micron size range.

Class 2 Water

A pressure dewpoint (PDP) of -40°C or better is required and no liquid water is allowed.

Class 1 Oil

In each cubic metre of compressed air, not more than 0.01mg of oil is allowed. This is a total level for liquid oil, oil aerosol and oil vapour.

ISO8573-1:2010 Class 0

- Class 0 does not mean zero contamination
- Class 0 does not mean oil-free compressed air
- A Class 0 compressor does not guarantee oil-free compressed air
- Class 0 does not solely refer to oil contamination
- A Class 0 specification must be 'cleaner' than the Class 1 specification for the contaminant chosen
- The contamination levels stated for a Class 0 specification must also be within the measurement capabilities of the test equipment and test methods shown in ISO8573 Pt 2 to Pt 9
- The Class 0 specification must clearly state which contaminant the Class 0 claim refers to i.e. "Solid Particulate", "Water" or "Total Oil (aerosol, liquid & vapour)"
- Class 0 requires the user or the equipment supplier to show a contamination level as part of a written specification
- **Example of a correctly written Class 0 specification**
"When preceded by OIL-X Grade AO General Purpose & Grade AA High Efficiency Coalescing Filters, OIL-X OVR Grade Adsorption Filters provide a delivered air quality in accordance with ISO8573-1:2010 Class 0 (<0.003 mg/m³) for total oil (oil aerosol & oil vapour)"
- The agreed Class 0 specification must be written on all documentation to be in accordance with the standard
- Stating Class 0 without an accompanying contaminant specification is meaningless and not in accordance with the standard

Selecting Parker purification equipment to comply with ISO8573-1:2010 air quality standard

Simple guidelines for the selection of purification equipment

1. Purification equipment is installed to provide air quality, therefore you must first of all identify the quality of compressed air required for the compressed air leaving the compressor room and for each point of use on the compressed air system.
2. The air quality required at each point of use may differ dependent upon the application.
3. Using the quality classifications shown in ISO8573-1 will allow easy selection of purification equipment.
4. ISO8573-1:2010 is the latest edition of the standard, however some facilities may still be operating on older revisions.
5. Specifying air quality as ISO8573-1, ISO8573-1:1991 or ISO8573-1:2001 refers to the previous editions of the standard and may result in a different quality of delivered compressed air.
6. Ensure any ISO8573-1 air purity classifications are written in full and include the revision year to allow for correct product selection.
7. Remember - Oil-free compressor installations require the same filtration considerations as oil lubricated compressor installations.

ISO8573-1:2010 CLASS	Solid Particulate		Water Vapour	Oil
	Wet Particulate	Dry Particulate		Total Oil (aerosol, liquid and vapour)
0	-	-	-	OIL-X Grade AO + AA + OVR
1	OIL-X Grade AO + AA	OIL-X Grade AO (M) + AA (M)	Dryer sized for -70°C PDP	OIL-X Grade AO + AA + OVR OIL-X Grade AO + AA +ACS
2	OIL-X Grade AO	OIL-X Grade AO (M)	Dryer sized for -40°C PDP	OIL-X Grade AO + AA
3	OIL-X Grade AO	OIL-X Grade AO (M)	Dryer sized for -20°C PDP	OIL-X Grade AO
4	OIL-X Grade AO	OIL-X Grade AO (M)	Dryer sized for +3°C PDP	OIL-X Grade AO
5	OIL-X Grade AO	OIL-X Grade AO (M)	Dryer sized for +7°C PDP	-
6	-	-	Dryer sized for +10°C PDP	-

For further information relating to ISO Compressed Air Quality Standards please refer to our white paper 'Introduction to ISO Compressed Air Quality Standards'. Available at parker.com/gsfe



Cost effective system design

To achieve the stringent air quality levels required for today's modern production facilities, a careful approach to system design, commissioning and operation must be employed.

Treatment at one point alone is not enough and it is highly recommended that the compressed air is treated in the compressor room to a level that will provide general purpose air to the site and also protect the distribution piping. Point of use purification should also be employed, not only to remove

any contamination remaining in the distribution system, but also with specific attention on the quality of air required by each application. This approach to system design ensures that air is not 'over treated' and provides the most cost effective solution to high quality compressed air.


FOOD / BEVERAGE / PHARMACEUTICAL - DIRECT CONTACT APPLICATIONS

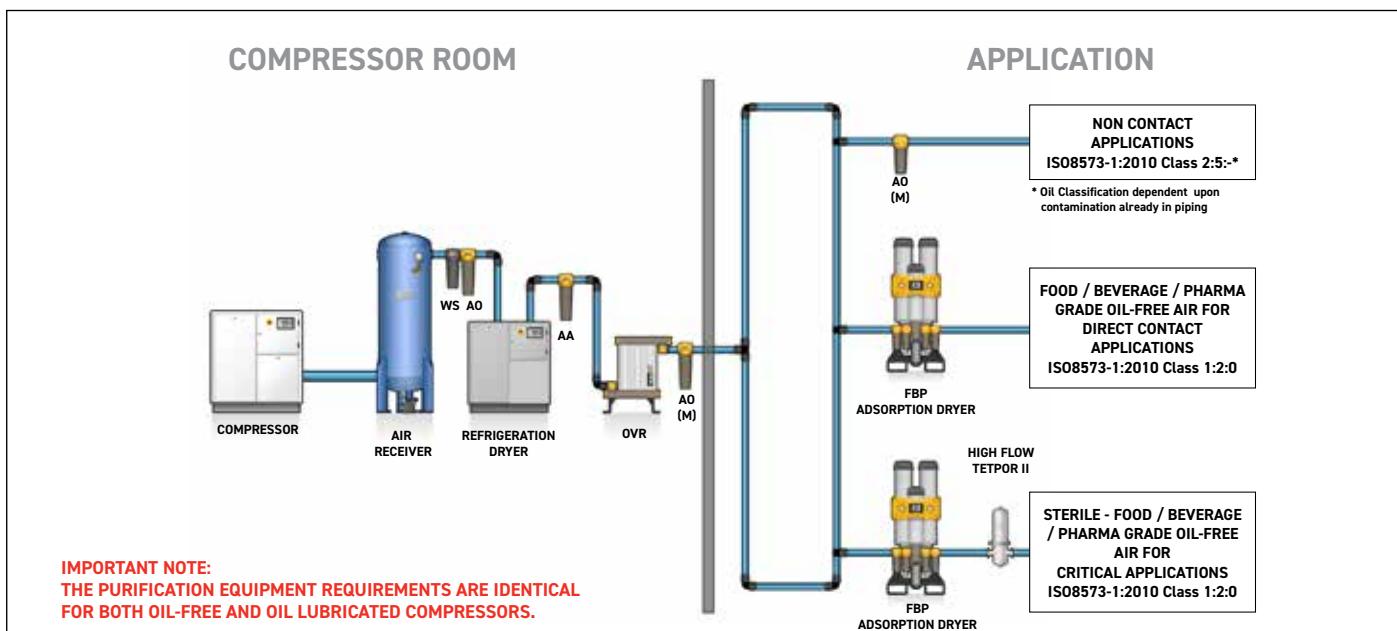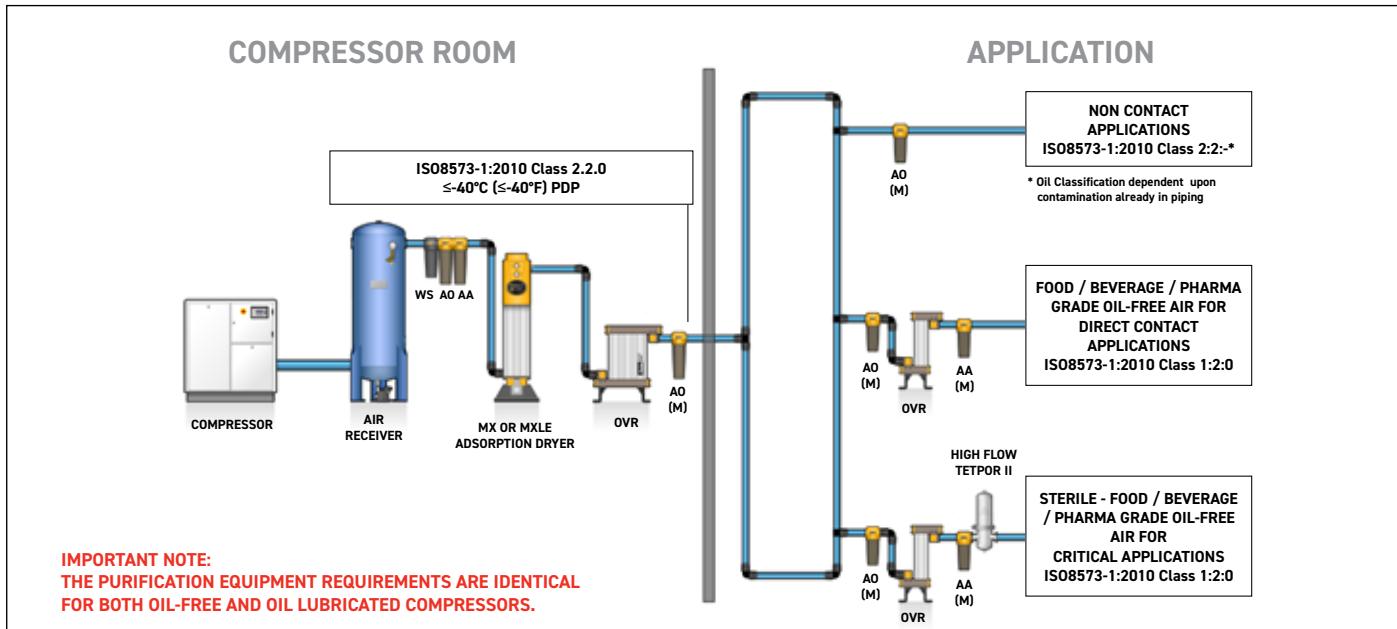

Typical Applications

Direct contact / in-direct contact applications in food manufacturing / beverage bottling / pharmaceutical manufacturing / dairies / breweries / wineries / distilleries (In accordance with BCAS Best Practice Guideline 102 Food & Beverage Grade Compressed Air).


HIGH QUALITY TECHNICALLY OIL-FREE AIR

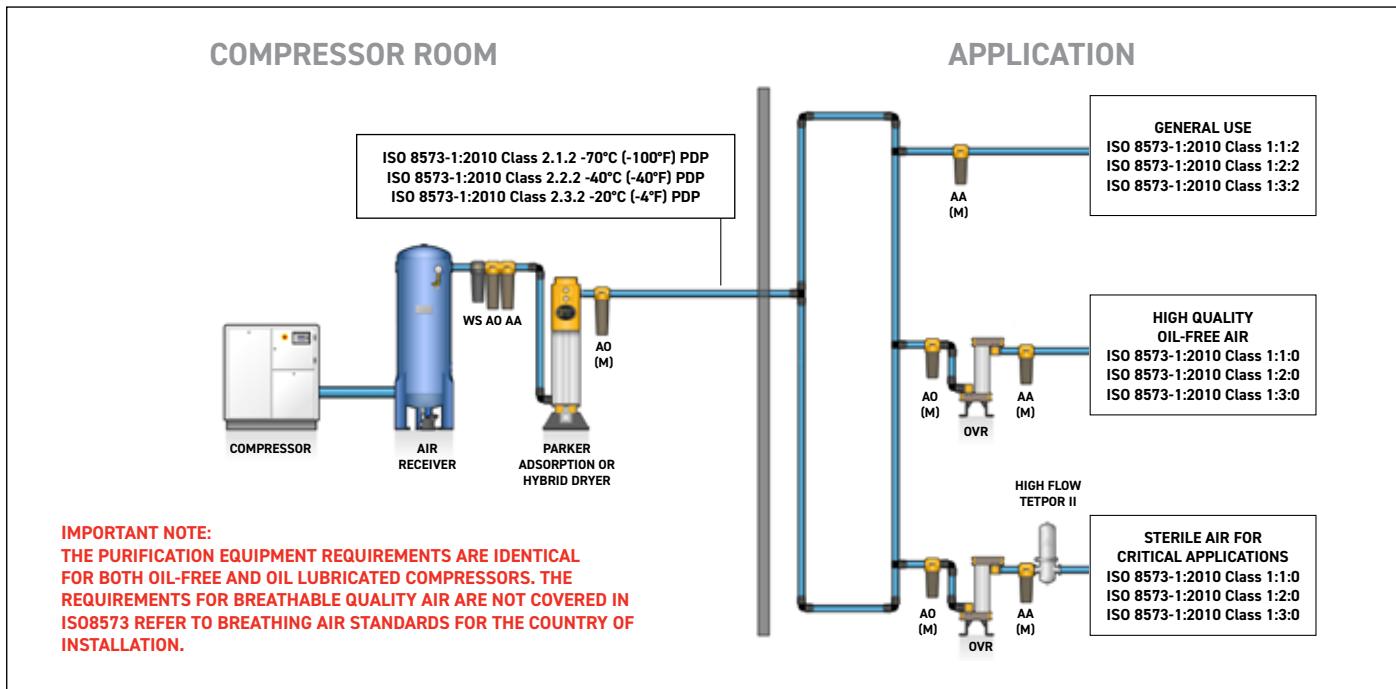

Typical Oil-Free Air Applications

Blow Moulding of Plastics e.g. P.E.T. Bottles	Decompression chambers	Air bearings
Electronics Manufacturing	Cosmetic production	Pipeline purging
CDA systems for electronics manufacturing	Medical air	Measuring equipment
Film processing	Dental air	Blanketing
Critical instrumentation	Lasers and optics	Modified Atmosphere Packaging
Advanced pneumatics	Robotics	Pre-treatment for on-site gas generation
Air blast circuit breakers	Spray painting	

GENERAL PURPOSE AIR WITH OIL-FREE AIR FOR CRITICAL APPLICATIONS

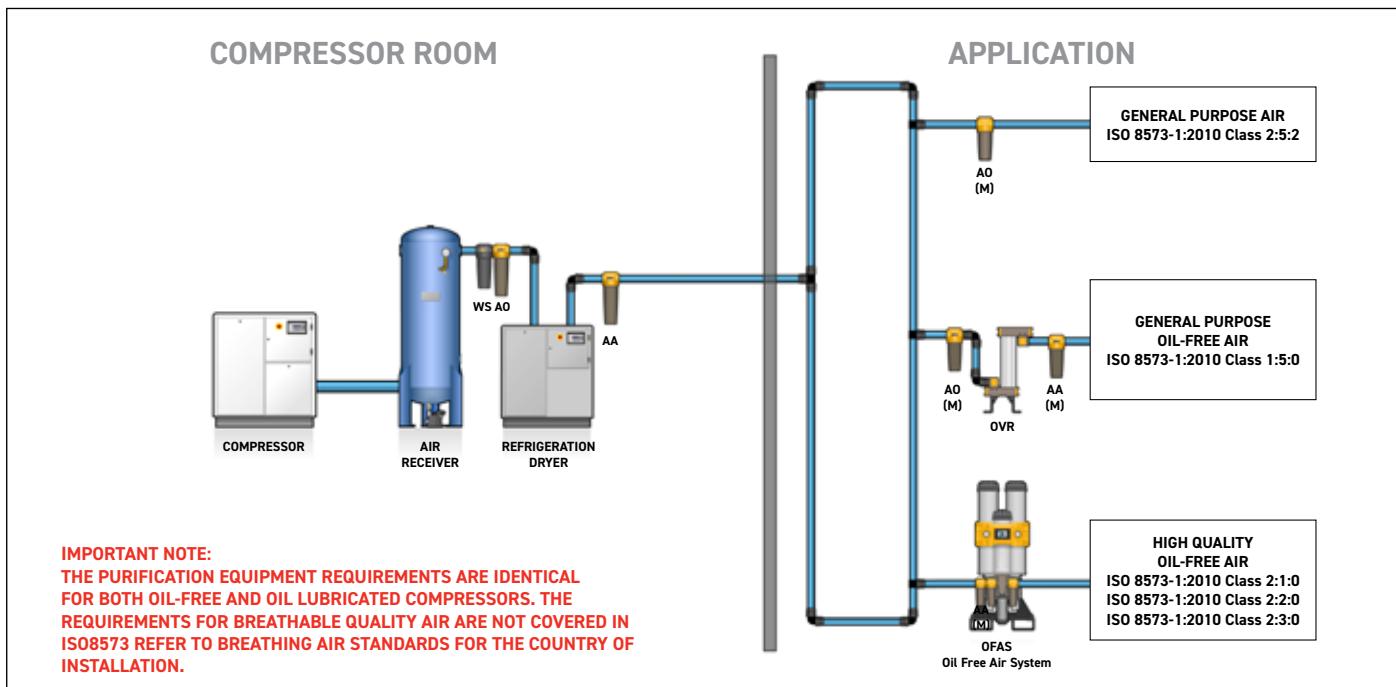

Typical General Purpose Applications

General ring main protection	Forging	Temperature control systems
Pre-filtration to point of use adsorption air dryers	General industrial assembly (no external piping)	Blow guns
Plant automation	Air conveying (non food)	Gauging equipment
Air logistics	Air motors	Raw material mixing
Pneumatic tools	Workshop (tools)	Sand / bead blasting
General instrumentation	Garage (tyre filling)	
Metal stamping		

Selecting the right purification products for your compressed air system

To achieve the degree of air quality specified by ISO8573-1, a careful approach to system design, commissioning and operation must be adopted.

Parker recommends that compressed air is treated:

- Prior to entry into the distribution system
- At critical usage points and applications


This ensures that contamination already in the distribution system is removed.

Purification equipment should be installed where the air is at the lowest possible temperature (i.e. downstream of after-coolers and air receivers). Point-of-use purification equipment should be installed as close as possible to the application.

In order to correctly size purification equipment, there are a number of primary operating parameters that must be obtained from the user's site. These are:

- The **MAXIMUM** compressed air flow rate into the filters / dryer
- The **MINIMUM** operating pressure into the filters / dryer
- The **MAXIMUM** operating temperature into the filters / dryer
- The **MAXIMUM** ambient air temperature where the equipment is to be installed
- The required dewpoint (**dryers**)

Individually, each of the primary operating parameters can influence product sizing however collectively they can have a major impact on product sizing and performance.

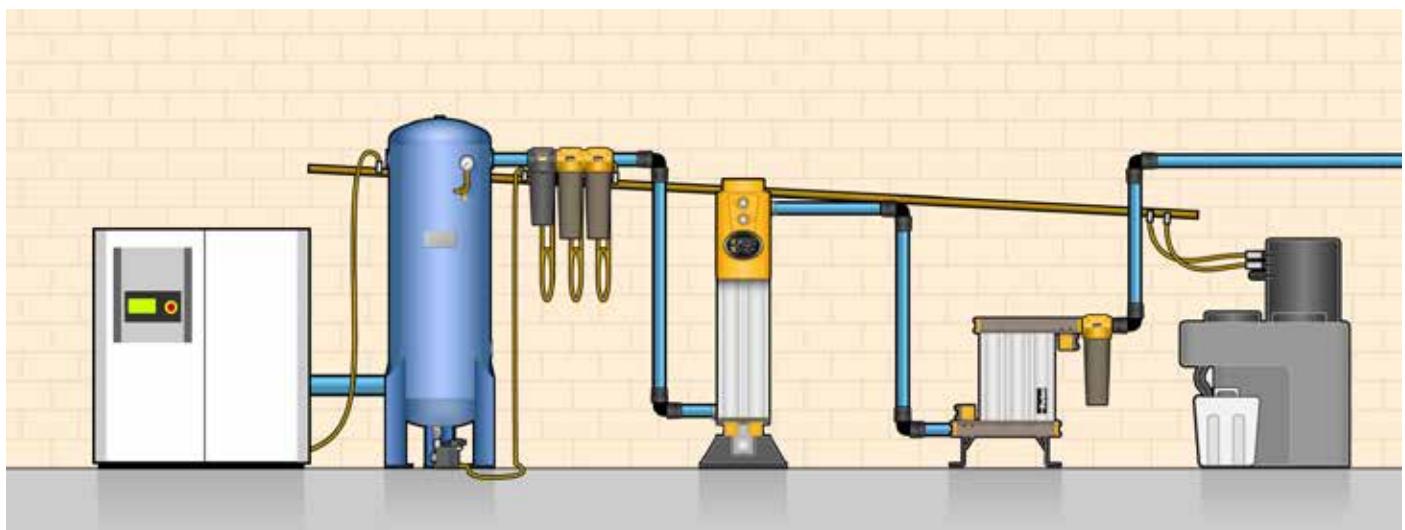

With the primary operating parameters, basic product selections can be made, however additional information may also be required to finalise product selection. Secondary parameters include:

- Minimum operating temperature
- Preferred pipe connections
- Available electrical supply (voltage / phase / frequency)
- Customers preference regarding drains, controllers or other options


Why is MAXIMUM Flow Rate Important?

Filtration: As compressed air flow rates increase, contamination levels increase and a larger filtration surface area is required to ensure adequate filtration performance, low pressure drop and 12 month lifetime of filter elements.

Dryers: As compressed air flow rates increase, the amount of water vapour the dryer must remove also increases.

Adsorption dryers must be sized on the highest flow rate to ensure the desiccant bed is large enough to provide the correct contact time and dewpoint.

Refrigeration dryers must be sized to ensure the heat exchanger is large enough and has enough cooling capacity.




Why is MINIMUM Inlet Pressure Important?

Dryers: As pressure decreases, the volume of compressed air increases, as does the water vapour content, therefore the amount of water vapour the dryer must remove also increases. Dryers must be sized for minimum inlet pressure to account for the increased amount of water vapour present.



Why is MAXIMUM Inlet Temperature Important?

Dryers: As the temperature of the compressed air increases, so does the water vapour content, therefore the amount of water vapour the dryer must remove also increases. Dryers must be sized for maximum inlet temperature to account for the increased amount of water vapour present.




Why is MAXIMUM Ambient Temperature Important?

Refrigeration & Tandem Technology Dryers: Air cooled refrigeration & Tandem Technology dryers use ambient air for heat exchange.

The lower the ambient air temperature, the better the heat exchange process


Poor ventilation and / or high ambient air temperatures will result in loss of dewpoint.



Why Correct a Dryer for Dewpoint?

Adsorption Dryers: Dewpoint is derived from contact time between the air and the desiccant material, lower dewpoints typically require the dryer to be de-rated to provide more contact time.


Refrigeration Dryers: The size of the heat exchangers affects the cooling capacity, too little cooling capacity results in poor dewpoint.



Frequently Asked Questions: High / Low Temperatures

High Temperatures

Maximum temperature (inlet & ambient) for dryers is 50°C or 122°F. For temperatures above this it is more cost effective to install an after-cooler than oversize a dryer. Also as a dryer increases in size, so does the volume of purge required to regenerate the dryer. Fitting an after-cooler is also more cost effective in terms of energy consumption.



Low Temperatures

Freezing water causes damage to a dryer therefore as the temperature approaches freezing, the dryer and ancillaries need protection. Sub-zero temperatures also affect the function of seals and electronics.


- Always keep purification equipment under shelter and out of cold wind / direct air blasts
- Trace heat & insulate anywhere where moisture is present i.e. Inlet filtration / drain lines / Inlet valves / columns / exhaust valves

OIL-X Liquid Separators


Separation Performance

Filtration Grade	Filter Type	Particle Reduction (inc water & oil aerosols)	Max Remaining Oil Content at 21°C (70°F)	Liquid Separation Efficiency	Change Element Every	Precede with Filtration Grade
WS	Liquid	Not Applicable	Not Applicable	>93%	Not Applicable	Not Applicable

OIL-X Grade WS Water Separator
Liquid Separation Efficiency (25% - 100% Rated Flow)

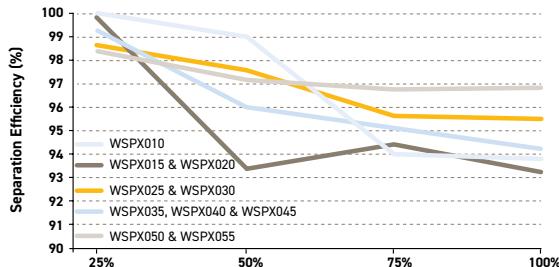

OIL-X Grade WS Water Separator
Differential Pressure (25% - 100% Rated Flow)

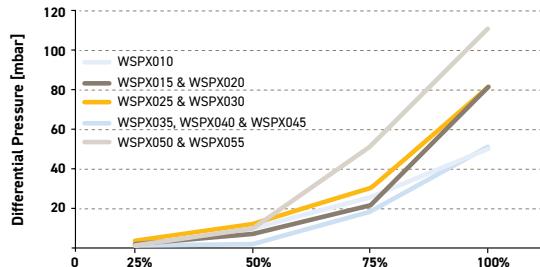

Technical Data

Filtration Grade	Water Separator Models	Min Operating Pressure		Max Operating Pressure		Min Operating Temperature		Max Operating Temperature	
		bar g	psi g	bar g	psi g	°C	°F	°C	°F
WS	PX010A - P055 (Float Drain)	1.5	22	16	232	2	35	65	149

Flow Rates Stated flows are for operation at 7 bar (g) (102 psi g) with reference to 20°C, 1 bar (a), 0% relative water vapour pressure.

Model	Pipe Size	L/S	m³/min	m³/hr	cfm	Initial Saturated Differential Pressure							
						100% Flow		75% Flow		50% Flow		25% Flow	
						mbar	psi	mbar	psi	mbar	psi	mbar	psi
WSPX010A <input checked="" type="checkbox"/> G FX	1/4"	10	0.6	36	21	53	0.8	29	0.4	14	0.2	4	0.1
WSPX010B <input checked="" type="checkbox"/> G FX	3/8"	10	0.6	36	21	51	0.7	27	0.4	12	0.2	2	0.0
WSPX010C <input checked="" type="checkbox"/> G FX	1/2"	10	0.6	36	21	48	0.7	25	0.4	10	0.1	0	0.0
WSPX015B <input checked="" type="checkbox"/> G FX	3/8"	40	2.4	144	85	64	0.9	25	0.4	12	0.2	6	0.1
WSPX015C <input checked="" type="checkbox"/> G FX	1/2"	40	2.4	144	85	55	0.8	22	0.3	10	0.1	4	0.1
WSPX020D <input checked="" type="checkbox"/> G FX	3/4"	40	2.4	144	85	42	0.6	22	0.3	7	0.1	2	0.0
WSPX025D <input checked="" type="checkbox"/> G FX	3/4"	110	6.6	396	233	98	1.4	55	0.8	23	0.3	4	0.1
WSPX025E <input checked="" type="checkbox"/> G FX	1"	110	6.6	396	233	95	1.4	52	0.8	20	0.3	1	0.0
WSPX030G <input checked="" type="checkbox"/> G FX	1 1/2"	110	6.6	396	233	82	1.2	30	0.4	13	0.2	4	0.1
WSPX035G <input checked="" type="checkbox"/> G FX	1 1/2"	350	21	1260	742	57	0.8	24	0.3	5	0.1	5	0.1
WSPX040H <input checked="" type="checkbox"/> G FX	2"	350	21	1260	742	52	0.8	19	0.3	0	0.0	0	0.0
WSPX045I <input checked="" type="checkbox"/> G FX	2 1/2"	350	21	1260	742	55	0.8	22	0.3	3	0.0	1	0.0
WSPX050I <input checked="" type="checkbox"/> G FX	2 1/2"	800	48	2880	1695	116	1.7	57	0.8	16	0.2	5	0.1
WSPX055J <input checked="" type="checkbox"/> G FX	3"	800	48	2880	1695	111	1.6	52	0.8	11	0.2	0	0.0

Select for BSPP Threads / Select NPT Threads

When selecting a coalescing filter for pressures above 16 bar g (232 psi g), use manual drain version and fit an external automatic drain.


Product Selection & Correction Factors

To correctly select a separator model, the flow rate of the separator must be adjusted for the minimum operating (inlet) pressure at the point of installation.

- Obtain the minimum operating (inlet) pressure and maximum compressed air flow rate at the inlet of the separator.
- Select the correction factor for minimum inlet pressure from the CFMIP table (always round down e.g. for 5.3 bar, use 5 bar correction factor)
- Calculate the minimum filtration capacity. Minimum Filtration Capacity = Compressed Air Flow Rate x CFP
- Using the minimum filtration capacity, select a filter model from the flow rate tables above (filter selected must have a flow rate equal to or greater than the minimum filtration capacity).

CFMIP - Correction Factor Minimum Inlet Pressure

Minimum Inlet Pressure	bar g	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
	psi g	15	29	44	58	73	87	100	116	131	145	160	174	189	203	218	232
Correction Factor		4.00	2.63	2.00	1.59	1.33	1.14	1.00	0.94	0.89	0.85	0.82	0.79	0.76	0.73	0.71	0.68

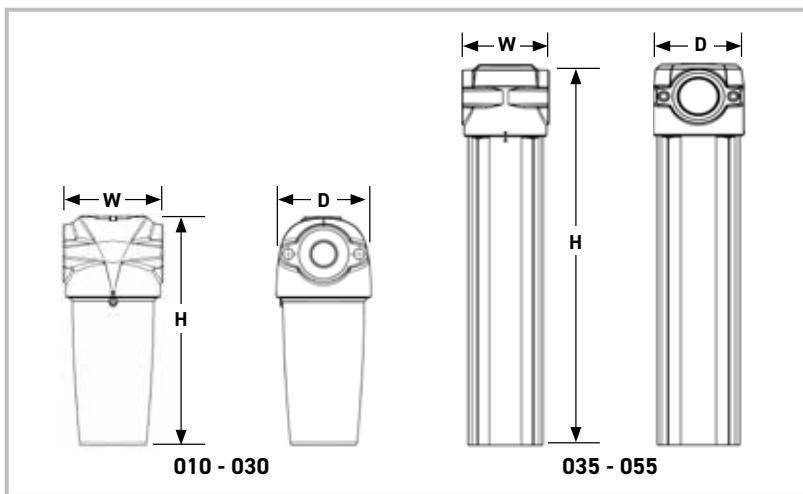

Weights & Dimensions

WSPX Model	Height (H)		Width (W)		Depth (D)		Weight	
	mm	ins	mm	ins	mm	ins	kg	lbs
010	180	7.09	76	2.99	65	2.56	0.81	1.78
015 / 020	238	9.37	89	3.50	84	3.31	1.41	3.10
025	277	10.91	120	4.72	115	4.53	2.66	5.86
030	277	10.91	120	4.72	115	4.53	2.66	5.86
035/040/ 045	440	17.32	164	6.46	157	6.18	6.87	15.14
050	614	24.17	192	7.56	183	7.20	8.47	18.66
055	515	20.28	192	7.56	183	7.20	8.47	18.66

Parker Catalogue Numbers (BSPP Models)

WSPX Model	Catalogue Number Water Separator
010A	WSPX010AGFX
010B	WSPX010BGFX
010C	WSPX010CGFX
015C	WSPX015CGFX
020D	WSPX020DGFX
025D	WSPX025DGFX
025E	WSPX025EGFX
030G	WSPX030GGFX
035G	WSPX035GGFX
040H	WSPX040HGFX
045I	WSPX045IGFX
050I	WSPX050IGFX
055J	WSPX055JGFX

SFH Liquid Separators (Carbon Steel)

Technical Data

Filtration Grade	Water Separator Models	Minimum Operating Pressure		Maximum Operating Pressure		Minimum Operating Temperature		Maximum Operating Temperature	
		bar g	psi g	bar g	psi g	°C	°F	°C	°F
SFH	SFH029N - SFH209N	1	15	16	232	2	35	60	140

Flow Rates

Model	Pipe Size		L/S	m³/min	m³/hr	cfm
	Inlet	Outlet				
SFH029	DN80	DN80	490	29.4	1764	1038
SFH030	DN100	DN80	500	30.0	1800	1059
SFH037	DN100	DN100	610	36.6	2196	1293
SFH038	DN125	DN100	633	38.0	2280	1342
SFH066	DN125	DN125	1093	65.6	3936	2317
SFH067	DN150	DN125	1117	67.0	4020	2366
SFH088	DN150	DN150	1473	88.4	5304	3122
SFH089	DN200	DN150	1483	89.0	5340	3143
SFH097	DN200	DN200	1618	97.1	5826	3429
SFH142	DN250	DN200	2365	141.9	8514	5011
SFH180	DN300	DN200	2992	179.5	10770	6339
SFH209	DN350	DN200	3485	209.1	12546	7385

Separator Coding Example

Example code
SFH067N

Stated flows are for operation at 7 bar (g) (102 psi g) with reference to 20°C, 1 bar (a), 0% relative water vapour pressure.
For flows at other pressures, apply the correction factors shown below.


Product Selection & Correction Factors

To correctly select a separator model, the flow rate of the separator must be adjusted for the minimum operating (inlet) pressure at the point of installation.

1. Obtain the minimum operating (inlet) pressure and maximum compressed air flow rate at the inlet of the filter.
2. Select the correction factor for minimum inlet pressure from the CFMIP table (always round down e.g. for 5.3 bar, use 5 bar correction factor)
3. Calculate the minimum filtration capacity. Minimum Filtration Capacity = Compressed Air Flow Rate x CFMIP
4. Using the minimum filtration capacity, select a filter model from the flow rate tables above (filter selected must have a flow rate equal to or greater than the minimum filtration capacity).

CFMIP - Correction Factor Minimum Inlet Pressure

Minimum Inlet Pressure	bar g	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
	psi g	15	29	44	58	73	87	100	116	131	145	160	174	189	203	218	232
Correction Factor		4.00	2.63	2.00	1.59	1.33	1.14	1.00	0.94	0.89	0.85	0.82	0.79	0.76	0.73	0.71	0.68

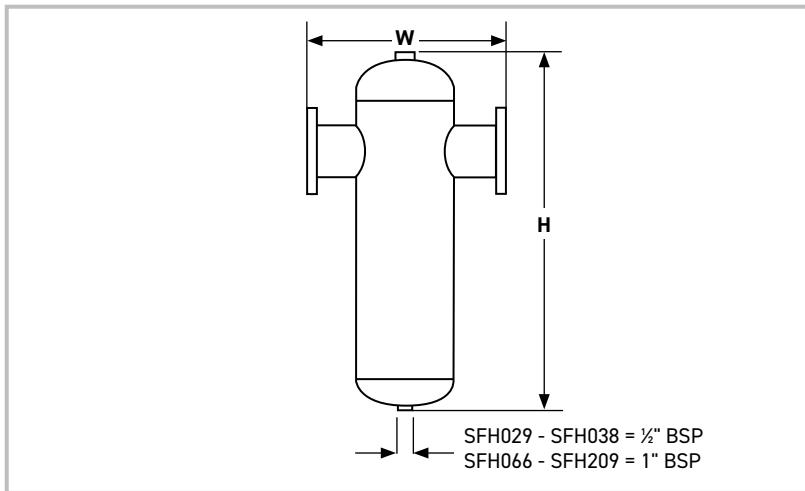

Weights & Dimensions

Model	Height (H)		Width (W)		Depth (D)		Weight	
	mm	ins	mm	ins	mm	ins	kg	lbs
SFH029	720	28.3	400	15.7	200	7.9	28	62
SFH030	720	28.3	400	15.7	200	7.9	29	64
SFH037	880	34.6	460	18.1	230	9.1	48	106
SFH038	880	34.6	460	18.1	230	9.1	49	108
SFH066	980	38.6	550	21.7	260	10.2	55	121
SFH067	980	38.6	550	21.7	260	10.2	56	123
SFH088	1060	41.7	570	22.4	290	11.4	82	180
SFH089	1060	41.7	570	22.4	290	11.4	85	187
SFH097	1160	45.7	660	26.0	320	12.6	126	277
SFH142	1255	49.4	680	26.8	351	13.8	148	326
SFH180	1455	57.3	750	29.5	390	15.4	160	352
SFH209	1655	65.2	830	32.7	430	16.9	205	451

Parker Catalogue Numbers

Model	Catalogue Number Water Separator
SFH029	SFH029N
SFH030	SFH030N
SFH037	SFH037N
SFH038	SFH038N
SFH066	SFH066N
SFH067	SFH067N
SFH088	SFH088N
SFH089	SFH089N
SFH097	SFH097N
SFH142	SFH142N
SFH180	SFH180N
SFH209	SFH209N

Grade AO General Purpose Coalescing Filter

Filtration Performance

Filtration Grade	Filter Type	Particle Reduction (inc water & oil aerosols)	Max Remaining Oil Content at 21°C (70°F)	Filtration Efficiency	Change Element Every	Precede with Filtration Grade
AO	Coalescing	Down to 1 micron	0.5 mg/m³ 0.5 ppm(w)	99.925%	12 months	WS (for bulk liquid)

Technical Data

Filtration Grade	Filter Models	Minimum Operating Pressure		Maximum Operating Pressure		Minimum Operating Temperature		Maximum Operating Temperature	
		bar g	psi g	bar g	psi g	°C	°F	°C	°F
AO	PX010 - PX055 (Float Drain)	1.5	22	16	232	2	35	65	149
AO	PX010 - PX055 (Manual Drain)	1	15	20	290	2	35	80	176

Flow Rates Stated flows are for operation at 7 bar (g) (102 psi g) with reference to 20°C, 1 bar (a), 0% relative water vapour pressure.

Model	Pipe Size	L/S	m³/min	m³/hr	cfm	Replacement Element	No.	Initial Saturated Differential Pressure							
								100% Flow		75% Flow		50% Flow		25% Flow	
								mbar	psi	mbar	psi	mbar	psi	mbar	psi
AOPX010A G FX	½"	10	0.6	36	21	P010AO	1	123	1.8	84	1.2	53	0.8	27	0.4
AOPX010B G FX	¾"	10	0.6	36	21	P010AO	1	124	1.8	85	1.2	55	0.8	30	0.4
AOPX010C G FX	½"	10	0.6	36	21	P010AO	1	121	1.8	82	1.2	44	0.6	15	0.2
AOPX015B G FX	¾"	20	1.2	72	42	P015AO	1	122	1.8	84	1.2	46	0.7	20	0.3
AOPX015C G FX	½"	20	1.2	72	42	P015AO	1	91	1.3	53	0.8	31	0.4	13	0.2
AOPX020C G FX	½"	30	1.8	108	64	P020AO	1	124	1.8	82	1.2	45	0.7	20	0.3
AOPX020D G FX	¾"	30	1.8	108	64	P020AO	1	113	1.6	72	1.0	34	0.5	10	0.1
AOPX025D G FX	¾"	60	3.6	216	127	P025AO	1	125	1.8	80	1.2	43	0.6	21	0.3
AOPX025E G FX	1"	60	3.6	216	127	P025AO	1	80	1.2	50	0.7	27	0.4	11	0.2
AOPX030E G FX	1"	110	6.6	396	233	P030AO	1	125	1.8	80	1.2	42	0.6	30	0.4
AOPX030G G FX	1¼"	110	6.6	396	233	P030AO	1	90	1.3	49	0.7	27	0.4	9	0.1
AOPX035G G FX	1½"	160	9.6	576	339	P035AO	1	81	1.2	44	0.6	18	0.3	5	0.1
AOPX040H G FX	2"	220	13.2	792	466	P040AO	1	113	1.6	69	1.0	40	0.6	20	0.3
AOPX045H G FX	2"	330	19.8	1188	699	P045AO	1	123	1.8	81	1.2	44	0.6	21	0.3
AOPX045I G FX	2½"	330	19.8	1188	699	P045AO	1	95	1.4	64	0.9	35	0.5	15	0.2
AOPX050I G FX	2½"	430	25.9	1548	911	P050AO	1	116	1.7	75	1.1	42	0.6	17	0.2
AOPX055I G FX	2½"	620	37.3	2232	1314	P055AO	1	123	1.8	81	1.2	45	0.7	24	0.3
AOPX055J G FX	3"	620	37.3	2232	1314	P055AO	1	112	1.6	55	0.8	32	0.5	17	0.2

Select **G** for BSPP Threads / Select **N** for NPT Threads

When selecting a coalescing filter for pressures above 16 bar g (232 psi g), use manual drain version and fit an external automatic drain.

Product Selection & Correction Factors

To correctly select a filter model, the flow rate of the filter must be adjusted for the minimum operating (inlet) pressure at the point of installation.

1. Obtain the minimum operating (inlet) pressure and maximum compressed air flow rate at the inlet of the filter.

2. Select the correction factor for minimum inlet pressure from the CFMIP table (always round down e.g. for 5.3 bar, use 5 bar correction factor)

3. Calculate the minimum filtration capacity. Minimum Filtration Capacity = Compressed Air Flow Rate x CFMIP

4. Using the minimum filtration capacity, select a filter model from the flow rate tables above (filter selected must have a flow rate equal to or greater than the minimum filtration capacity).

CFMIP - Correction Factor Minimum Inlet Pressure

Minimum Inlet Pressure	bar g	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
psi g	15	29	44	58	73	87	100	116	131	145	160	174	189	203	218	232	248	263	277	290	
Correction Factor	2.65	1.87	1.53	1.32	1.18	1.08	1.00	0.94	0.88	0.84	0.80	0.76	0.73	0.71	0.68	0.66	0.64	0.62	0.61	0.59	

Grade AA High Efficiency Coalescing Filter

Filtration Performance

Filtration Grade	Filter Type	Particle Reduction (inc water & oil aerosols)	Max Remaining Oil Content at 21°C (70°F)	Filtration Efficiency	Change Element Every	Precede with Filtration Grade
AA	Coalescing	Down to 0.01 micron	0.01 mg/m³ 0.01 ppm(w)	99.9999%	12 months	AO

Technical Data

Filtration Grade	Filter Models	Min Operating Pressure		Max Operating Pressure		Min Operating Temperature		Max Operating Temperature	
		bar g	psi g	bar g	psi g	°C	°F	°C	°F
AA	PX010 - PX055 (Float Drain)	1.5	22	16	232	2	35	65	149
AA	PX010 - PX055 (Manual Drain)	1	15	20	290	2	35	80	176

Flow Rates Stated flows are for operation at 7 bar (g) (102 psi g) with reference to 20°C, 1 bar (a), 0% relative water vapour pressure.

Model	Pipe Size	L/S	m³/min	m³/hr	cfm	Replacement Element	No.	Initial Saturated Differential Pressure							
								100% Flow		75% Flow		50% Flow		25% Flow	
								mbar	psi	mbar	psi	mbar	psi	mbar	psi
AAPX010A G FX	½"	10	0.6	36	21	P010AA	1	117	1.7	83	1.2	50	0.7	25	0.4
AAPX010B G FX	¾"	10	0.6	36	21	P010AA	1	121	1.8	85	1.2	52	0.8	27	0.4
AAPX010C G FX	½"	10	0.6	36	21	P010AA	1	111	1.6	75	1.1	41	0.6	20	0.3
AAPX015B G FX	¾"	20	1.2	72	42	P015AA	1	115	1.7	79	1.1	44	0.6	24	0.3
AAPX015C G FX	½"	20	1.2	72	42	P015AA	1	80	1.2	51	0.7	27	0.4	12	0.2
AAPX020C G FX	½"	30	1.8	108	64	P020AA	1	122	1.8	80	1.2	41	0.6	18	0.3
AAPX020D G FX	¾"	30	1.8	108	64	P020AA	1	100	1.5	60	0.9	37	0.5	24	0.3
AAPX025D G FX	¾"	60	3.6	216	127	P025AA	1	86	1.2	57	0.8	33	0.5	10	0.1
AAPX025E G FX	1"	60	3.6	216	127	P025AA	1	66	1.0	45	0.7	25	0.4	10	0.1
AAPX030E G FX	1"	110	6.6	396	233	P030AA	1	122	1.8	82	1.2	42	0.6	11	0.2
AAPX030G G FX	½"	110	6.6	396	233	P030AA	1	104	1.5	55	0.8	30	0.4	10	0.1
AAPX035G G FX	½"	160	9.6	576	339	P035AA	1	75	1.1	45	0.7	20	0.3	5	0.1
AAPX040H G FX	2"	220	13.2	792	466	P040AA	1	90	1.3	60	0.9	40	0.6	20	0.3
AAPX045H G FX	2"	330	19.8	1188	699	P045AA	1	108	1.6	71	1.0	35	0.5	12	0.2
AAPX045I G FX	2½"	330	19.8	1188	699	P045AA	1	108	1.6	70	1.0	32	0.5	15	0.2
AAPX050I G FX	2½"	430	25.9	1548	911	P050AA	1	90	1.3	66	1.0	43	0.6	18	0.3
AAPX055I G FX	2½"	620	37.3	2232	1314	P055AA	1	119	1.7	78	1.1	44	0.6	21	0.3
AAPX055J G FX	3"	620	37.3	2232	1314	P055AA	1	104	1.5	52	0.8	25	0.4	17	0.2


Select G for BSPP Threads / Select N for NPT Threads

When selecting a coalescing filter for pressures above 16 bar g (232 psi g), use manual drain version and fit an external automatic drain.

Filtration Tested In Accordance With

Filtration Grade	AO with float drain	AA with float drain
Filter Type	Coalescing	Coalescing
Test Methods Used	ISO 8573-2:2018 ISO 8573-4: 2019 ISO 12500-1:2007	ISO 8573-2:2018 ISO 8573-4: 2019 ISO 12500-1:2007
ISO12500-1 Inlet Challenge Concentration	40 mg of oil aerosol per cubic metre of compressed air	10 mg of oil aerosol per cubic metre of compressed air

OIL-X Grade AO & AA Oil Carryover versus Flow

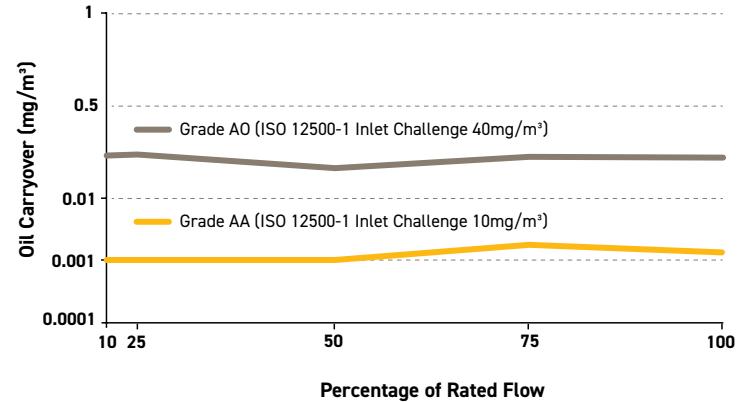

Grade AO General Purpose Dry Particulate Filter

Filtration Performance

Filtration Grade	Filter Type	Particle Reduction (inc water & oil aerosols)	Max Remaining Oil Content at 21°C (70°F)	Filtration Efficiency	Change Element Every	Precede with Filtration Grade
AO	Dry Particulate	Down to 1 micron	Not Applicable	99.925%	12 months	Not Applicable

Technical Data

Filtration Grade	Filter Models	Minimum Operating Pressure		Maximum Operating Pressure		Minimum Operating Temperature		Maximum Operating Temperature	
		bar g	psi g	bar g	psi g	°C	°F	°C	°F
AO	PX010 - PX055 (Float Drain)	1.5	22	16	232	2	35	65	149
AO	PX010 - PX055 (Manual Drain)	1	15	20	290	2	35	80	176

Flow Rates Stated flows are for operation at 7 bar (g) (102 psi g) with reference to 20°C, 1 bar (a), 0% relative water vapour pressure.

Model	Pipe Size	L/S	m³/min	m³/hr	cfm	Replacement Element	No.	Initial Dry Differential Pressure							
								100% Flow		75% Flow		50% Flow		25% Flow	
								mbar	psi	mbar	psi	mbar	psi	mbar	psi
AOPX010A G MX	1/4"	10	0.6	36	21	P010AO	1	61	0.9	40	0.6	20	0.3	9	0.1
AOPX010B G MX	3/8"	10	0.6	36	21	P010AO	1	63	0.9	43	0.6	22	0.3	11	0.2
AOPX010C G MX	1/2"	10	0.6	36	21	P010AO	1	58	0.8	35	0.5	20	0.3	11	0.2
AOPX015B G MX	3/8"	20	1.2	72	42	P015AO	1	60	0.9	38	0.6	23	0.3	12	0.2
AOPX015C G MX	1/2"	20	1.2	72	42	P015AO	1	27	0.4	15	0.2	10	0.1	5	0.1
AOPX020C G MX	1/2"	30	1.8	108	64	P020AO	1	58	0.8	35	0.5	15	0.2	8	0.1
AOPX020D G MX	3/4"	30	1.8	108	64	P020AO	1	38	0.6	20	0.3	10	0.1	5	0.1
AOPX025D G MX	1/2"	60	3.6	216	127	P025AO	1	54	0.8	39	0.6	21	0.3	8	0.1
AOPX025E G MX	1"	60	3.6	216	127	P025AO	1	22	0.3	15	0.2	9	0.1	5	0.1
AOPX030E G MX	1"	110	6.6	396	233	P030AO	1	56	0.8	38	0.6	20	0.3	7	0.1
AOPX030G G MX	1 1/2"	110	6.6	396	233	P030AO	1	42	0.6	26	0.4	12	0.2	6	0.1
AOPX035G G MX	1 1/2"	160	9.6	576	339	P035AO	1	19	0.3	9	0.1	5	0.1	2	0.0
AOPX040H G MX	2"	220	13.2	792	466	P040AO	1	31	0.4	19	0.3	16	0.2	7	0.1
AOPX045H G MX	2"	330	19.8	1188	699	P045AO	1	51	0.7	36	0.5	18	0.3	8	0.1
AOPX045I G MX	2 1/2"	330	19.8	1188	699	P045AO	1	40	0.6	27	0.4	12	0.2	6	0.1
AOPX050I G MX	2 1/2"	430	25.9	1548	911	P050AO	1	36	0.5	23	0.3	16	0.2	7	0.1
AOPX055I G MX	2 1/2"	620	37.3	2232	1314	P055AO	1	38	0.6	25	0.4	17	0.2	10	0.1
AOPX055J G MX	3"	620	37.3	2232	1314	P055AO	1	51	0.7	32	0.5	17	0.2	8	0.1

Select for BSPP Threads / Select for NPT Threads

When selecting a coalescing filter for pressures above 16 bar g (232 psi g), use manual drain version and fit an external automatic drain.

Product Selection & Correction Factors

To correctly select a filter model, the flow rate of the filter must be adjusted for the minimum operating (inlet) pressure at the point of installation.

1. Obtain the minimum operating (inlet) pressure and maximum compressed air flow rate at the inlet of the filter.

2. Select the correction factor for minimum inlet pressure from the CFMIP table (always round down e.g. for 5.3 bar, use 5 bar correction factor)

3. Calculate the minimum filtration capacity. Minimum Filtration Capacity = Compressed Air Flow Rate x CFMIP

4. Using the minimum filtration capacity, select a filter model from the flow rate tables above (filter selected must have a flow rate equal to or greater than the minimum filtration capacity).

CFMIP - Correction Factor Minimum Inlet Pressure

Minimum Inlet Pressure	bar g	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
psi g	15	29	44	58	73	87	100	116	131	145	160	174	189	203	218	232	248	263	277	290	
Correction Factor	2.65	1.87	1.53	1.32	1.18	1.08	1.00	0.94	0.88	0.84	0.80	0.76	0.73	0.71	0.68	0.66	0.64	0.62	0.61	0.59	

Grade AA High Efficiency Dry Particulate Filter

Filtration Performance

Filtration Grade	Filter Type	Particle Reduction (inc water & oil aerosols)	Max Remaining Oil Content at 21°C (70°F)	Filtration Efficiency	Change Element Every	Precede with Filtration Grade
AA	Not Applicable	Down to 0.01 micron	Not Applicable	99.9999%	12 months	AO Dry Particulate

Technical Data

Filtration Grade	Filter Models	Min Operating Pressure		Max Operating Pressure		Min Operating Temperature		Max Operating Temperature	
		bar g	psi g	bar g	psi g	°C	°F	°C	°F
AA	PX010 - PX055 (Float Drain)	1.5	22	16	232	2	35	65	149
AA	PX010 - PX055 (Manual Drain)	1	15	20	290	2	35	80	176

Flow Rates Stated flows are for operation at 7 bar (g) (102 psi g) with reference to 20°C, 1 bar (a), 0% relative water vapour pressure.

Model	Pipe Size	L/S	m³/min	m³/hr	cfm	Replacement Element	No.	Initial Dry Differential Pressure							
								100% Flow		75% Flow		50% Flow		25% Flow	
mbar	psi	mbar	psi	mbar	psi	mbar	psi	mbar	psi	mbar	psi	mbar	psi	mbar	psi
AAPX010A G MX	1/4"	10	0.6	36	21	P010AA	1	64	0.9	36	0.5	21	0.3	10	0.1
AAPX010B G MX	3/8"	10	0.6	36	21	P010AA	1	65	0.9	38	0.6	22	0.3	11	0.2
AAPX010C G MX	1/2"	10	0.6	36	21	P010AA	1	63	0.9	39	0.6	20	0.3	10	0.1
AAPX015B G MX	3/8"	20	1.2	72	42	P015AA	1	66	1.0	41	0.6	21	0.3	12	0.2
AAPX015C G MX	1/2"	20	1.2	72	42	P015AA	1	22	0.3	51	0.7	27	0.4	11	0.2
AAPX020C G MX	1/2"	30	1.8	108	64	P020AA	1	64	0.9	41	0.6	18	0.3	8	0.1
AAPX020D G MX	3/4"	30	1.8	108	64	P020AA	1	42	0.6	22	0.3	10	0.1	5	0.1
AAPX025D G MX	3/4"	60	3.6	216	127	P025AA	1	27	0.4	19	0.3	10	0.1	4	0.1
AAPX025E G MX	1"	60	3.6	216	127	P025AA	1	29	0.4	19	0.3	10	0.1	5	0.1
AAPX030E G MX	1"	110	6.6	396	233	P030AA	1	62	0.9	49	0.7	25	0.4	8	0.1
AAPX030G G MX	1 1/2"	110	6.6	396	233	P030AA	1	45	0.7	27	0.4	13	0.2	5	0.1
AAPX035G G MX	1 1/2"	160	9.6	576	339	P035AA	1	22	0.3	10	0.1	5	0.1	2	0.0
AAPX040H G MX	2"	220	13.2	792	466	P040AA	1	36	0.5	24	0.3	15	0.2	8	0.1
AAPX045H G MX	2"	330	19.8	1188	699	P045AA	1	47	0.7	25	0.4	18	0.3	15	0.2
AAPX045I G MX	2 1/2"	330	19.8	1188	699	P045AA	1	47	0.7	30	0.4	17	0.2	8	0.1
AAPX050I G MX	2 1/2"	430	25.9	1548	911	P050AA	1	40	0.6	27	0.4	16	0.2	8	0.1
AAPX055I G MX	2 1/2"	620	37.3	2232	1314	P055AA	1	45	0.7	27	0.4	17	0.2	10	0.1
AAPX055J G MX	3"	620	37.3	2232	1314	P055AA	1	54	0.8	35	0.5	17	0.2	9	0.1





Select for BSPP Threads / Select for NPT Threads


When selecting a coalescing filter for pressures above 16 bar g (232 psi g), use manual drain version and fit an external automatic drain.

Multi-box Replacement Filter Elements

OIL-X Housing	Multi-Box Part Number		Box Quantity
	Grade AO	Grade AO	
PX010 & P010	P010AOX25	P010AAX25	25
PX015 & P015	P015AOX25	P015AAX25	25
PX020 & P020	P020AOX25	P020AAX25	25
PX025 & P025	P025AOX12	P025AAX12	12
PX030 & P030	P030AOX12	P030AAX12	12
PX035 & P035	P035AOX15	P035AAX15	15
PX040 & P040	P040AOX15	P040AAX15	15
PX045 & P045	P045AOX15	P045AAX15	15

OIL-X Grades AO & AA - Differential Pressure Curves

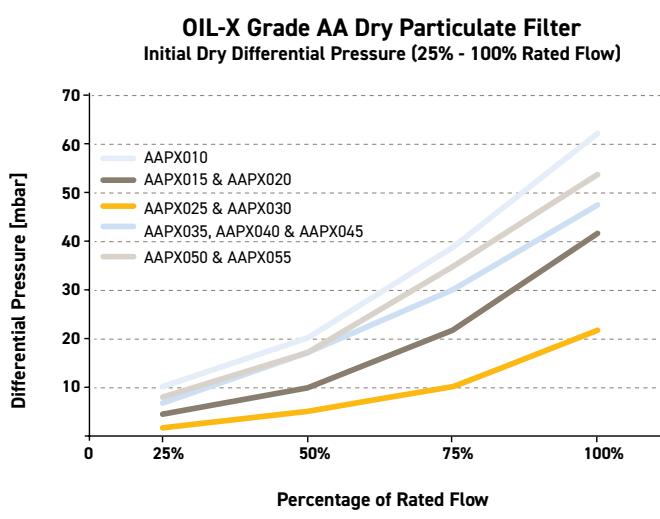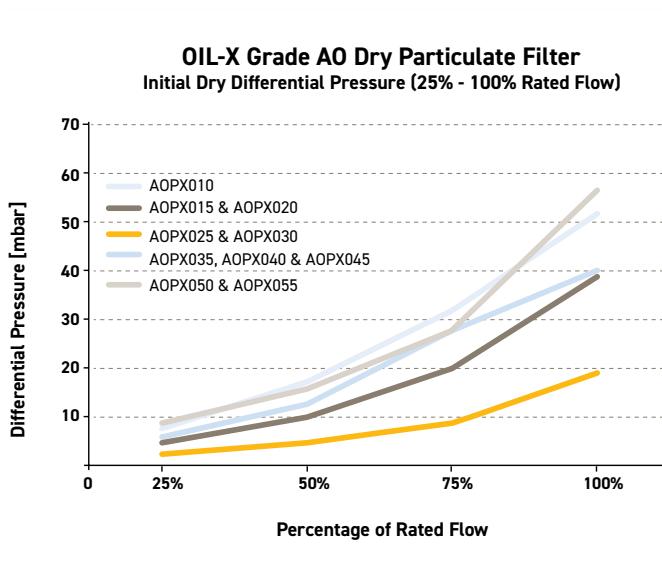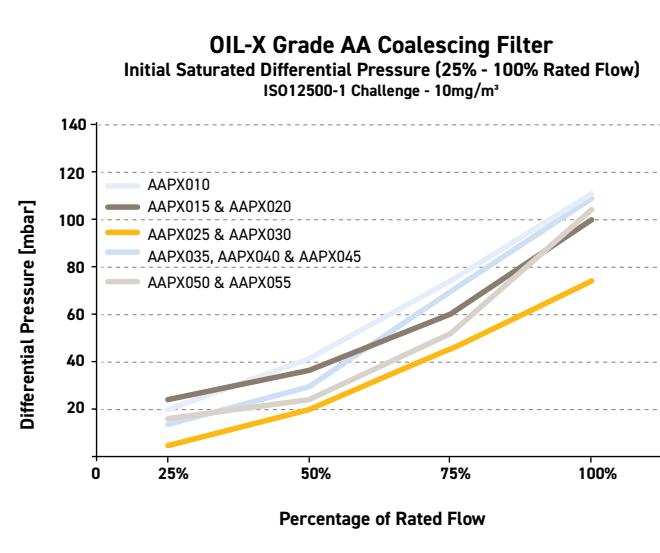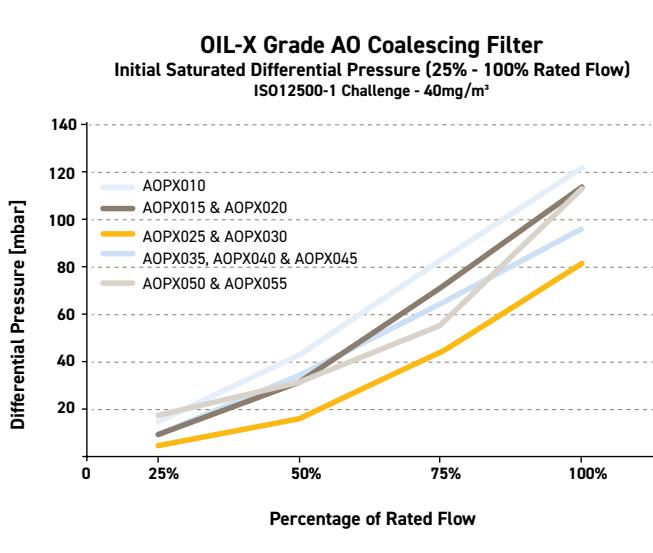

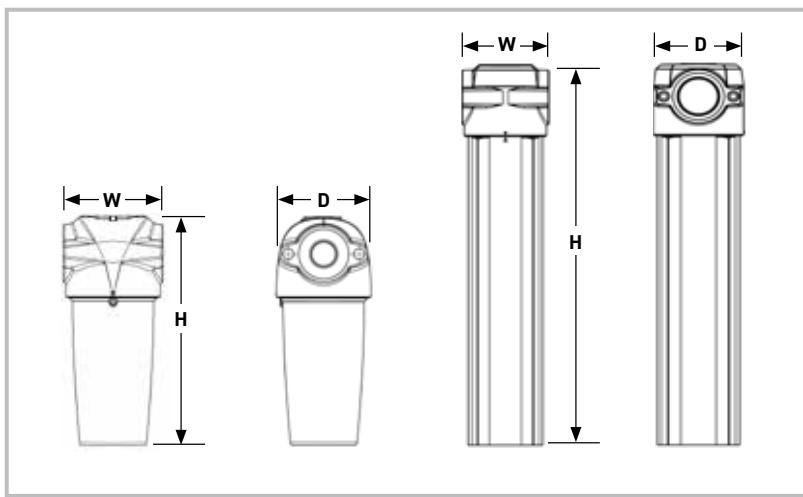

Weight & Dimensions

Model	Height (H)		Width (W)		Depth (D)		Weight	
	mm	ins	mm	ins	mm	ins	kg	lbs
PX010	180	7.09	76	2.99	65	2.56	0.81	1.78
PX015	238	9.37	89	3.50	84	3.31	1.41	3.10
PX020	238	9.37	89	3.50	84	3.31	1.41	3.10
PX025	277	10.91	120	4.72	115	4.53	2.66	5.86
PX030	367	14.45	120	4.72	115	4.53	3.01	6.63
PX035	440	17.32	164	6.46	157	6.18	6.87	15.14
PX040	532	20.94	164	6.46	157	6.18	7.18	15.82
PX045	532	20.94	164	6.46	157	6.18	7.18	15.82
PX050	654	25.75	192	7.56	183	7.20	10.18	22.43
PX055	844	33.23	192	7.56	183	7.20	15.78	34.78

Parker Catalogue Numbers (BSPP Models)

Model	General Purpose Coalescing Filters	General Purpose Dry Particulate Filters	High Efficiency Coalescing Filters	High Efficiency Dry Particulate Filters
PX010A	AOPX010AGFX	AOPX010AGMX	AAPX010AGFX	AAPX010AGMX
PX010B	AOPX010BGFX	AOPX010BGMX	AAPX010BGFX	AAPX010BGMX
PX010C	AOPX010CGFX	AOPX010CGMX	AAPX010CGFX	AAPX010CGMX
PX015C	AOPX015CGFX	AOPX015CGMX	AAPX015CGFX	AAPX015CGMX
PX020C	AOPX020CGFX	AOPX020CGMX	AAPX020CGFX	AAPX020CGMX
PX020D	AOPX020DGFX	AOPX020DGMX	AAPX020DGFX	AAPX020DGMX
PX025D	AOPX025DGFX	AOPX025DGMX	AAPX025DGFX	AAPX025DGMX
PX025E	AOPX025EGFX	AOPX025EGMX	AAPX025EGFX	AAPX025EGMX
PX030G	AOPX030GGFX	AOPX030GGMX	AAPX030GGFX	AAPX030GGMX
PX035G	AOPX035GGFX	AOPX035GGMX	AAPX035GGFX	AAPX035GGMX
PX040H	AOPX040HGFX	AOPX040HGMX	AAPX040HGFX	AAPX040HGMX
PX045I	AOPX045IGFX	AOPX045IGMX	AAPX045IGFX	AAPX045IGMX
PX050I	AOPX050IGFX	AOPX050IGMX	AAPX050IGFX	AAPX050IGMX
PX055I	AOPX055IGFX	AOPX055IGMX	AAPX055IGFX	AAPX055IGMX
PX055J	AOPX055JGFX	AOPX055JGMX	AAPX055JGFX	AAPX055JGMX

OIL-X Coalescing / Dry Particulate / Oil Vapour Reduction Filters (Carbon Steel)

Filtration Performance

Filtration Grade	Filter Type	Particle Reduction (inc water & oil aerosols)	Max. Remaining Oil Content at 21°C (70°F)	Filtration Efficiency	Initial Dry Differential Pressure	Initial Saturated Differential Pressure	Change Element Every	Precede with Filtration Grade
AO	Coalescing & Dry Particulate	Down to 1 micron	0.5 mg/m³ 0.5 ppm(w)	99.925%	<70 mbar (1 psi)	<125 mbar (1.8 psi)	12 months	WS (for bulk liquid)
AA	Coalescing & Dry Particulate	Down to 0.01 micron	0.01 mg/m³ 0.01 ppm(w)	99.9999%	<70 mbar (1 psi)	<125 mbar (1.8 psi)	12 months	AO
ACS	Oil Vapour Reduction	N/A	0.003 mg/m³ 0.003 ppm(w)	N/A	<140 mbar (2 psi)	N/A	When oil vapour is detected	AO+AA

Important Note:

Using the same filter housings as their coalescing and dry particulate counterparts in the OIL-X range, Grade ACS filter elements differ in that they utilise a deep wrapped bed of carbon cloth to adsorb oil vapour.

It is important to note, in-line adsorption filter elements have a different life span compared to coalescing and dry particulate filters and require more frequent element changes. Should a 12 month service period be required, Parker OIL-X Grade OVR oil vapour reduction filters are recommended.

Technical Data

Filtration Grade	Filter Models	Minimum Operating Pressure		Maximum Operating Pressure		Minimum Operating Temperature		Maximum Operating Temperature	
		bar g	psi g	bar g	psi g	°C	°F	°C	°F
AO/AA	065 - 095 (Electronic Drain)	1	15	16	232	2	35	60	140
	065 - 095 (Manual Drain)	1	15	16	232	2	35	100	212
ACS	065 - 095 (Manual Drain)	1	15	16	232	2	35	50	122

Flow Rates

Model	Pipe Size	L/S	m³/min	m³/hr	cfm	Replacement Element	No.
Grade 065ND □ X	DN80	620	37.2	2232	1312	200 Grade	1
Grade 070OD □ X	DN100	1240	74.4	4464	2625	200 Grade	2
Grade 075PD □ X	DN150	1860	111.6	6696	3938	200 Grade	3
Grade 080PD □ X	DN150	2480	148.8	8928	5251	200 Grade	4
Grade 085QD □ X	DN200	3720	223.2	13392	7877	200 Grade	6
Grade 090RD □ X	DN250	6200	372	22320	13129	200 Grade	10
Grade 095SD □ X	DN300	8680	520.8	31248	18380	200 Grade	14

Filter Coding Example

Grade	Model	Pipe Size	Thread	Drain Option	Incident Monitor Option
AO	3 digit code denotes filter housing size	Letter denotes pipe size	D = Din Flange	E = Electronic M = Manual	I = Indicator X = None
AA					
ACS					

Example code

AO	090	P	D	E	X
----	-----	---	---	---	---

□ = Replace with drain type - E (electronic) or M (manual)

Stated flows are for operation at 7 bar (g) (102 psi g) with reference to 20°C, 1 bar (a), 0% relative water vapour pressure.

For flows at other pressures, apply the correction factors shown below.


Product Selection & Correction Factors

To correctly select a filter model, the flow rate of the filter must be adjusted for the minimum operating (inlet) pressure at the point of installation.

- Obtain the minimum operating (inlet) pressure and maximum compressed air flow rate at the inlet of the filter.
- Select the correction factor for minimum inlet pressure from the CFMIP table (always round down e.g. for 5.3 bar, use 5 bar correction factor)
- Calculate the minimum filtration capacity. Minimum Filtration Capacity = Compressed Air Flow Rate x CFMIP
- Using the minimum filtration capacity, select a filter model from the flow rate tables above (filter selected must have a flow rate equal to or greater than the minimum filtration capacity).

CFMIP - Correction Factor Minimum Inlet Pressure

Minimum Inlet Pressure	bar g	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Correction Factor	2.65	1.87	1.53	1.32	1.18	1.08	1.00	0.94	0.88	0.84	0.80	0.76	0.73	0.71	0.68	0.66	
psi g	15	29	44	58	73	87	100	116	131	145	160	174	189	203	218	232	

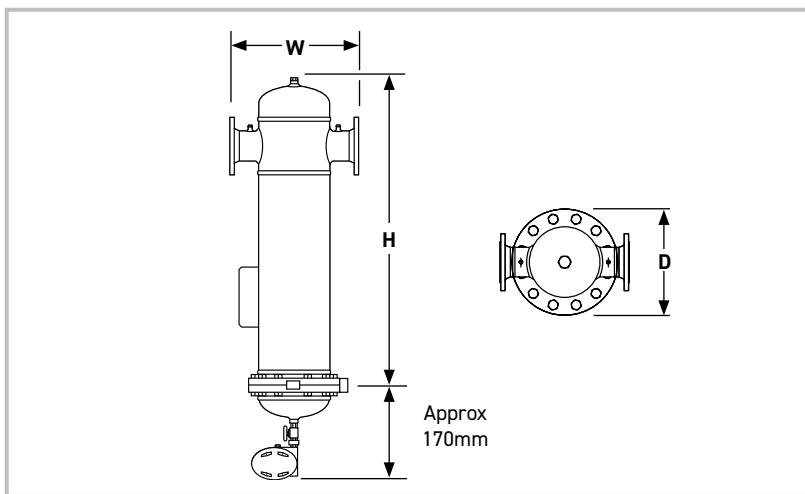

Weight & Dimensions

Model	Height (H)		Width (W)		Depth (D)		Weight	
	mm	ins	mm	ins	mm	ins	kg	lbs
065ND	1065	42	440	17.3	340	13.4	70	154
070OD	1152	45.4	500	19.7	405	16	97	214
075PD	1256	49.5	600	23.6	520	20.5	148	326
080PD	1332	52.4	650	25.6	580	22.8	187	412
085QD	1415	55.7	750	29.5	640	25.2	240	529
090RD	1603	63.1	1000	39.4	840	33	470	1036
095SD	1706	67.2	1050	41.3	910	35.8	580	1279

Parker Catalogue Numbers (No DPI)

Model	Catalogue Number General Purpose Coalescing Filters	Catalogue Number General Purpose Dry Particulate Filters	Catalogue Number High Efficiency Coalescing Filters	Catalogue Number High Efficiency Dry Particulate Filters	Catalogue Number Oil Vapour Reduction Filters
065N	AO065NDEX	AO065NDMX	AA065NDEX	AA065NDMX	ACS065NDMX
070O	AO070ODEX	AO070ODMX	AA070ODEX	AA070ODMX	ACS070ODMX
075P	AO075PDEX	AO075PDMX	AA075PDEX	AA075PDMX	ACS075PDMX
080P	AO080PDEX	AO080PDMX	AA080PDEX	AA080PDMX	ACS080PDMX
085Q	AO085QDEX	AO085QDMX	AA085QDEX	AA085QDMX	ACS085QDMX
090P	AO090RDEX	AO090RDMX	AA090RDEX	AA090RDMX	ACS090RDMX
095S	AO095SDEX	AO095SDMX	AA095SDEX	AA095SDMX	ACS095SDMX

Parker Catalogue Numbers (With DPI)

Model	Catalogue Number General Purpose Coalescing Filters	Catalogue Number General Purpose Dry Particulate Filters	Catalogue Number High Efficiency Coalescing Filters	Catalogue Number High Efficiency Dry Particulate Filters
065N	AO065NDEI	AO065NDMI	AA065NDEI	AA065NDMI
070O	AO070ODEI	AO070ODMI	AA070ODEI	AA070ODMI
075P	AO075PDEI	AO075PDMI	AA075PDEI	AA075PDMI
080P	AO080PDEI	AO080PDMI	AA080PDEI	AA080PDMI
085Q	AO085QDEI	AO085QDMI	AA085QDEI	AA085QDMI
090P	AO090RDEI	AO090RDMI	AA090RDEI	AA090RDMI
095S	AO095SDEI	AO095SDMI	AA095SDEI	AA095SDMI

OIL-X Point Of Use Oil Vapour Reduction Filters

Filtration Performance

Filtration Grade	Filter Type	Particle Reduction (inc water & oil aerosols)	Max Remaining Oil Content at 21°C (70°F)	Filtration Efficiency	Change Element Every	Precede with Filtration Grade
ACS	Oil Vapour Reduction	N/A	0.003 mg/m³ 0.003 ppm(w)	N/A	When oil vapour is detected	A0+AA

Technical Data

Filtration Grade	Filter Models	Minimum Operating Pressure		Maximum Operating Pressure		Minimum Operating Temperature		Maximum Operating Temperature	
		bar g	psi g	bar g	psi g	°C	°F	°C	°F
ACS	PX010 - PX055 (Manual Drain)	1	15	20	290	2	35	50	122

Flow Rates Stated flows are for operation at 7 bar (g) (102 psi g) with reference to 20°C, 1 bar (a), 0% relative water vapour pressure.

Model	Pipe Size	L/S	m³/min	m³/hr	cfm	Replacement Element	No.	Initial Dry Differential Pressure							
								100% Flow		75% Flow		50% Flow		25% Flow	
								mbar	psi	mbar	psi	mbar	psi	mbar	psi
ACSPX010A G MX	1/2"	10	0.6	36	21	P010ACS	1	61	0.9	35	0.5	15	0.2	9	0.1
ACSPX010B G MX	3/8"	10	0.6	36	21	P010ACS	1	53	0.8	32	0.5	19	0.3	8	0.1
ACSPX010C G MX	1/2"	10	0.6	36	21	P010ACS	1	55	0.8	31	0.4	18	0.3	7	0.1
ACSPX015B G MX	3/8"	20	1.2	72	42	P015ACS	1	65	0.9	33	0.5	13	0.2	5	0.1
ACSPX015C G MX	1/2"	20	1.2	72	42	P015ACS	1	46	0.7	37	0.5	20	0.3	9	0.1
ACSPX020C G MX	1/2"	30	1.8	108	64	P020ACS	1	77	1.1	35	0.5	15	0.2	7	0.1
ACSPX020D G MX	3/8"	30	1.8	108	64	P020ACS	1	79	1.1	37	0.5	17	0.2	8	0.1
ACSPX025D G MX	3/8"	60	3.6	216	127	P025ACS	1	66	1.0	34	0.5	14	0.2	4	0.1
ACSPX025E G MX	1"	60	3.6	216	127	P025ACS	1	46	0.7	24	0.3	13	0.2	4	0.1
ACSPX030E G MX	1"	110	6.6	396	233	P030ACS	1	57	0.8	27	0.4	16	0.2	8	0.1
ACSPX030G G MX	1 1/2"	110	6.6	396	233	P030ACS	1	65	0.9	35	0.5	15	0.2	5	0.1
ACSPX035G G MX	1 1/2"	160	9.6	576	339	P035ACS	1	26	0.4	12	0.2	8	0.1	4	0.1
ACSPX040H G MX	2"	220	13.2	792	466	P040ACS	1	36	0.5	23	0.3	13	0.2	4	0.1
ACSPX045H G MX	2"	330	19.8	1188	699	P045ACS	1	49	0.7	34	0.5	17	0.2	6	0.1
ACSPX045I G MX	2 1/2"	330	19.8	1188	699	P045ACS	1	68	1.0	40	0.6	20	0.3	6	0.1
ACSPX050I G MX	2 1/2"	430	25.9	1548	911	P050ACS	1	50	0.7	30	0.4	15	0.2	5	0.1
ACSPX055I G MX	2 1/2"	620	37.3	2232	1314	P055ACS	1	61	0.9	36	0.5	16	0.2	12	0.2
ACSPX055J G MX	3"	620	37.3	2232	1314	P055ACS	1	50	0.7	35	0.5	17	0.2	5	0.1

Select for BSPP Threads / Select for NPT Threads

When selecting a coalescing filter for pressures above 16 bar g (232 psi g), use manual drain version and fit an external automatic drain.

Product Selection & Correction Factors

To correctly select a filter model, the flow rate of the filter must be adjusted for the minimum operating (inlet) pressure at the point of installation.

1. Obtain the minimum operating (inlet) pressure and maximum compressed air flow rate at the inlet of the filter.


2. Select the correction factor for minimum inlet pressure from the CFMIP table (always round down e.g. for 5.3 bar, use 5 bar correction factor)

3. Calculate the minimum filtration capacity. Minimum Filtration Capacity = Compressed Air Flow Rate x CFMIP

4. Using the minimum filtration capacity, select a filter model from the flow rate tables above (filter selected must have a flow rate equal to or greater than the minimum filtration capacity).

CFMIP - Correction Factor Minimum Inlet Pressure

Minimum Inlet Pressure	bar g	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
psi g	15	29	44	58	73	87	100	116	131	145	160	174	189	203	218	232	248	263	277	290	
Correction Factor	2.65	1.87	1.53	1.32	1.18	1.08	1.00	0.94	0.88	0.84	0.80	0.76	0.73	0.71	0.68	0.66	0.64	0.62	0.61	0.59	

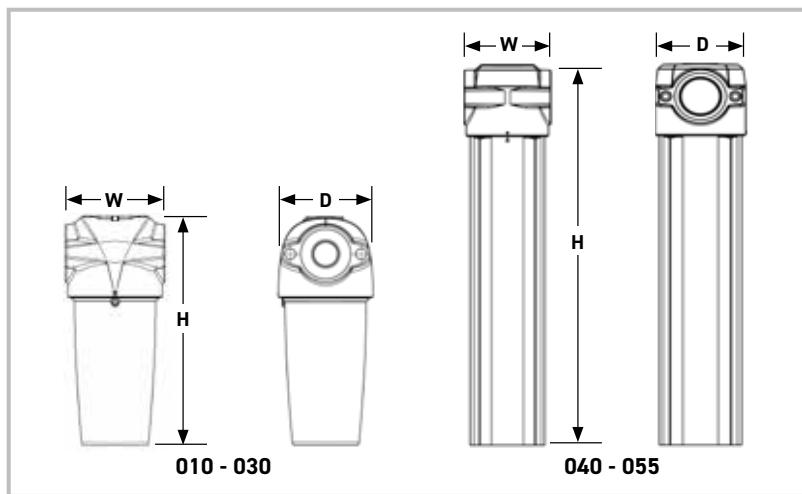

Weights & Dimensions

Model	Height (H)		Width (W)		Depth (D)		Weight	
	mm	ins	mm	ins	mm	ins	kg	lbs
PX010	180	7.09	76	2.99	65	2.56	0.81	1.78
PX015	238	9.37	89	3.50	84	3.31	1.41	3.10
PX020	238	9.37	89	3.50	84	3.31	1.41	3.10
PX025	277	10.91	120	4.72	115	4.53	2.66	5.86
PX030	367	14.45	120	4.72	115	4.53	3.01	6.63
PX035	440	17.32	164	6.46	157	6.18	6.87	15.14
PX040	532	20.94	164	6.46	157	6.18	7.18	15.82
PX045	532	20.94	164	6.46	157	6.18	7.18	15.82
PX050	654	25.75	192	7.56	183	7.20	10.18	22.43
PX055	844	33.23	192	7.56	183	7.20	15.78	34.78

Parker Catalogue Numbers (BSPP Models)

Model	Catalogue Number Oil Vapour Reduction Filters
PX010A	ACSPX010AGMX
PX010B	ACSPX010BGMX
PX010C	ACSPX010CGMX
PX015C	ACSPX015CGMX
PX020C	ACSPX020CGMX
PX020D	ACSPX020DGMX
PX025D	ACSPX025DGMX
PX025E	ACSPX025EGMX
PX030G	ACSPX030GGMX
PX035G	ACSPX035GGMX
PX040H	ACSPX040HGMX
PX045I	ACSPX045IGMX
PX050I	ACSPX050IGMX
PX055I	ACSPX055IGMX
PX055J	ACSPX055JGMX

Multi-box Replacement Filter Elements

OIL-X Housing	Multi-Box Part Number	Box Quantity
PX010 & P010	P010ACSX25	25
PX015 & P015	P015ACSX25	25
PX020 & P020	P020ACSX25	25
PX025 & P025	P025ACSX12	12
PX030 & P030	P030ACSX12	12
PX035 & P035	P035ACSX15	15
PX040 & P040	P040ACSX15	15
PX045 & P045	P045ACSX15	15

OIL-X OVR Plant Scale Oil Vapour Reduction

Filtration Performance

Filtration Grade	Filter Type	Particle Reduction (inc Water & Oil Aerosols)	Max Remaining Oil Content*	Filtration Efficiency	Initial Dry Differential Pressure	Initial Saturated Differential Pressure	Adsorbent Life	Precede with Grade
OVR	Oil Vapour Reduction	N/A	≤ 0.003 mg/m³ ≤ 0.003 ppm (w)	N/A	<350 mbar <5 psi	N/A	*12 months	AO + AA

*At system operating temperature and when corrected to match systems conditions.

Technical Data

Filtration Grade	Filter Models	Minimum Operating Pressure		Maximum Operating Pressure		Minimum Operating Temperature		Maximum Operating Temperature	
		bar g	psi g	bar g	psi g	°C	°F	°C	°F
OVR	P300H - P550I	1	15	16	232	2	35	50	122

Flow Rates Stated flows are for operation at 7 bar (g) (102 psi g) with reference to 20°C, 1 bar (a), 0% relative water vapour pressure.

Model	Pipe Size	L/s	m³/min	m³/hr	cfm	Replacement Cartridge	No.	Differential Pressure (OVR Only)							
								100% Flow		75% Flow		50% Flow		25% Flow	
								mbar	psi	mbar	psi	mbar	psi	mbar	psi
OVRP300H G XX	2	80	4.8	289	170	P300OVR	1	350	5.1	198	2.9	46	0.7	11	0.2
OVRP350H G XX	2	163	9.8	586	345	P350OVR	1	350	5.1	198	2.9	46	0.7	11	0.2
OVRP400I G XX	2½"	326	19.6	1172	690	P400OVR	1	350	5.1	198	2.9	46	0.7	11	0.2
OVRP450I G XX	2½"	488	29.4	1758	1035	P450OVR	1	350	5.1	198	2.9	46	0.7	11	0.2
OVRP500I G XX	2½"	651	39.2	2345	1380	P500OVR	1	350	5.1	198	2.9	46	0.7	11	0.2
OVRP550I G XX	2½"	814	48.9	2931	1725	P550OVR	1								
2 x OVRP550I G XX	2½"	1629	97.9	5862	3451	P550OVR	2								
3 x OVRP550I G XX	2½"	2443	146.8	8793	5176	P550OVR	3								
4 x OVRP550I G XX	2½"	3257	195.8	11724	6901	P550OVR	4								
5 x OVRP550I G XX	2½"	4071	244.7	14656	8626	P550OVR	5								

Select G for BSPP Threads / Select N for NPT Threads

1 System Information Required for OVR Sizing & Selection

- Minimum pressure at the inlet of the OVR
- Compressor type (oil lubricated or oil free)
- Maximum inlet temperature at the inlet of the OVR (highest summer inlet temp)
- Maximum compressed air flow rate
- Dewpoint of the compressed air (i.e. is the proposed location of the unit before or after a compressed air dryer)
- Oil vapour concentration expected at the inlet of the OVR (default is 0.05 mg/m³)


2 Select correction factors

- For minimum inlet pressure, select a correction factor from the CFIP table that corresponds to the minimum inlet pressure of the compressed air system, remembering to always round down e.g. for 5.3 bar g use the 5 bar g correction factor.
- For maximum inlet temperature there are two tables, one for use with an oil lubricated compressor, the other for oil free compressor. Select a correction factor from the CFIT table for the relevant compressor type, remembering to always round up e.g. for 37 °C use the 40 °C correction factor.
- For pressure dewpoint, select a correction factor from the CFID table.
- For oil vapour concentration, select a correction factor from the CFIV table, remembering to always round up e.g. for 3.25g/m³ use the correction factor for 4mg/m³.

3 Calculate minimum filtration capacity

Minimum filtration Capacity = Compressed Air Flow x CFIT x CFMIP x CFID x CFIV

- Using the minimum filtration capacity, select an OVR model from the flow rate tables.
- The OVR model selected must have a flow rate equal to or greater than the minimum filtration capacity.
- If the minimum filtration capacity exceeds the maximum values of the models shown within the tables, please contact Parker for advice regarding larger multi-banked units.

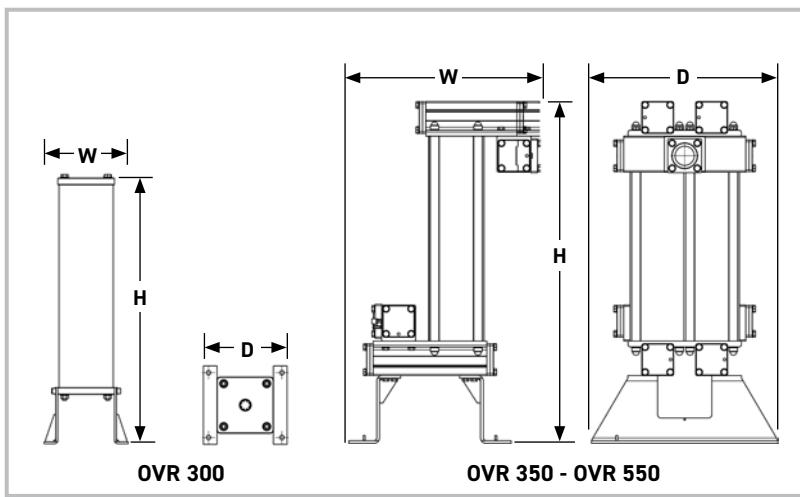

Correction Factors Inlet Temperature (CFIT)

Oil lubricated compressors		
°C	°F	Correction Factor
25	77	1.00
30	86	1.00
35	95	1.00
40	104	1.25
45	113	1.55
50	122	1.90

Correction Factors Inlet Temperature (CFIT)

Oil free compressors		
°C	°F	Correction Factor
25	77	1.00
30	86	1.00
35	95	1.00
40	104	1.02
45	113	1.04
50	122	1.05

Correction Factor Minimum Inlet Pressure (CFMIP)

Minimum Inlet Pressure	bar g	3	4	5	6	7	8	9	10	11	12	13	14	15	16
	psi g	44	58	73	87	100	116	131	145	160	174	189	203	218	232
Correction Factor		2.00	1.60	1.33	1.14	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

Correction Factor - Dewpoint (CFID)

Installation	Correction Factor	Inlet Vapour Concentration mg/m³	0.05	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0	2.0	3.0	4.0	5.0
			After Dryer	1.00	Correction Factor	1	2	4	6	8	10	12	14	16	18	20	40
Before Dryer		4.00															100

Correction Factor Inlet Vapour Content (CFIV)

Weight & Dimensions

Models	Height (H)		Width (W)		Depth (D)		Weight			
	mm	ins	mm	ins	mm	ins	kg	lbs		
OVRP300	998	39.3	534	21.0	350	13.8	38	84		
OVRP350	1062	41.8	538	21.2	550	21.7	67	147		
OVRP400	1062	41.8	682	26.9	550	21.7	93	205		
OVRP450	1062	41.8	836	32.9	550	21.7	121	267		
OVRP500	1062	41.8	1005	39.6	550	21.7	144	318		
OVRP550	1062	41.8	1174	46.2	550	21.7	171	377		

Parker Catalogue Numbers

Model	Catalogue Number		Catalogue Number
	Plant Scale Oil Vapour Reduction (BSPP)	Plant Scale Oil Vapour Reduction (NPT)	
OVRP300	OVRP300HGXX		OVRP300HNXX
OVRP350	OVRP350HGXX		OVRP350HNXX
OVRP400	OVRP400HGXX		OVRP400HNXX
OVRP450	OVRP450IGXX		OVRP450INXX
OVRP500	OVRP500IGXX		OVRP500INXX
OVRP550	OVRP550IGXX		OVRP550INXX

OIL-X Combination Filters

Filtration Performance

Filtration Grade	Filter Type	Particle Reduction (inc water & oil aerosols)	Max. Remaining Oil Content at 21°C (70°F)	Filtration Efficiency	Initial Dry Differential Pressure	Initial Saturated Differential Pressure	Change Element Every	Precede with Filtration Grade
AC	High Efficiency Coalescing & Oil Vapour Reduction	Down to 0.01 micron	Aerosols 0.01 mg/m³ 0.01 ppm(w) Vapour 0.003 mg/m³ 0.003 ppm(w)	N/A	<618 mbar (9 psi)	<773 mbar (11 psi)	Coalescing Element 12 Months Oil Vapour Reduction Element When oil vapour is detected	AO

Technical Data

Filtration Grade	Filter Models	Minimum Operating Pressure		Maximum Operating Pressure		Minimum Operating Temperature		Maximum Operating Temperature	
		bar g	psi g	bar g	psi g	°C	°F	°C	°F
AC	010 - 030 (Float Drain)	1	15	16	232	2	35	30	86
AC	010 - 030 (Manual Drain)	1	15	20	290	2	35	30	86

Flow Rates

Model	Pipe Size	L/S	m³/min	m³/hr	cfm	Replacement Elements
AC010A FX	1/4"	6	0.4	22	13	010AA 010AC
AC010B FX	3/8"	6	0.4	22	13	010AA 010AC
AC010C FX	1/2"	6	0.4	22	13	010AA 010AC
AC015B FX	3/8"	13	0.8	46	27	015AA 015AC
AC015C FX	1/2"	13	0.8	46	27	015AA 015AC
AC020C FX	1/2"	25	1.5	90	53	020AA 020AC
AC020D FX	3/4"	25	1.5	90	53	020AA 020AC
AC020E FX	1"	25	1.5	90	53	020AA 020AC
AC025D FX	3/4"	40	2.4	143	84	025AA 025AC
AC025E FX	2"	65	3.9	231	136	025AA 025AC
AC030E FX	1"	85	5.1	305	180	030AA 030AC
AC030F FX	1 1/4"	85	5.1	305	180	030AA 030AC
AC030F FX	1 1/2"	85	5.1	305	180	030AA 030AC

G = BSPP / N=NPT

Stated flows are for operation at 7 bar (g) (102 psi g) with reference to 20°C, 1 bar (a), 0% relative water vapour pressure. For flows at other pressures, apply the correction factors shown below.

Filter Coding Example

Grade	Model	Pipe Size	Thread	Drain Option	Incident Monitor Option
AC	3 digit code denotes filter housing size	Letter denotes pipe size	G = BSPP N = NPT	F = Float M = Manual	X = None
Example code					
AC	010	A	G	F	X


To correctly select a filter model, the flow rate of the filter must be adjusted for the minimum operating (inlet) pressure at the point of installation.

1. Obtain the minimum operating (inlet) pressure and maximum compressed air flow rate at the inlet of the filter.
2. Select the correction factor for minimum inlet pressure from the CFMIP table (always round down e.g. for 5.3 bar, use 5 bar correction factor)
3. Calculate the minimum filtration capacity. Minimum Filtration Capacity = Compressed Air Flow Rate x CFMIP
4. Using the minimum filtration capacity, select a filter model from the flow rate tables above (filter selected must have a flow rate equal to or greater than the minimum filtration capacity).

CFMIP - Correction Factor Minimum Inlet Pressure

Minimum Inlet Pressure	bar g	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
	psi g	15	29	44	58	73	87	100	116	131	145	160	174	189	203	218	232	248	263	277	290
Correction Factor		2.65	1.87	1.53	1.32	1.18	1.08	1.00	0.94	0.88	0.84	0.80	0.76	0.73	0.71	0.68	0.66	0.64	0.62	0.61	0.59

When ordering a filter for pressures above 16 bar g (232 psi g), use a manual drain. Replace F with M in product code. e.g. AC015BGFX becomes AC015BGMX.

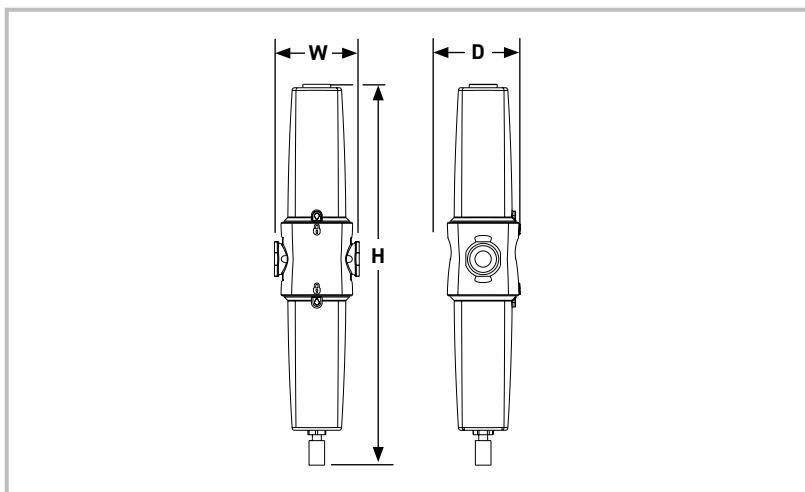

Weight & Dimensions

Model	Height (H)		Width (W)		Depth (D)		Weight	
	mm	ins	mm	ins	mm	ins	kg	lbs
AC010A	311	12.3	76	3.0	65	2.6	0.8	1.8
AC010B	311	12.3	76	3.0	65	2.6	0.8	1.8
AC010C	311	12.3	76	3.0	65	2.6	0.8	1.8
AC015B	474	18.7	97	3.8	84	3.3	1.6	3.5
AC015C	474	18.7	97	3.8	84	3.3	1.6	3.5
AC020C	474	18.7	97	3.8	84	3.3	1.4	3.2
AC020D	474	18.7	97	3.8	84	3.3	1.4	3.2
AC020E	474	18.7	97	3.8	84	3.3	1.4	3.2
AC025D	554	21.8	129	5.1	115	4.5	3.5	7.8
AC025E	554	21.8	129	5.1	115	4.5	3.4	7.6
AC030E	733	28.9	129	5.1	115	4.5	4.1	9.0
AC030F	733	28.9	129	5.1	115	4.5	4.1	9.0
AC030G	733	28.9	129	5.1	115	4.5	4.1	9.0

Parker Catalogue Numbers (BSPP Models)

Model	Catalogue Number Double Stage Oil Vapour Reduction Filters
AC010A	AC010AGFX
AC010B	AC010BGFX
AC010C	AC010CGFX
AC015B	AC015BGFX
AC015C	AC015CGFX
AC020C	AC020CGFX
AC020D	AC020DGFX
AC020E	AC020EGFX
AC025D	AC025DGFX
AC025E	AC025EGFX
AC030FG	AC030FGFX
AC030G	AC030GGFX

0003G Micro Filters

Filtration Performance

Filtration Grade	Filter Type	Particle Reduction (inc water & oil aerosols)	Max Remaining Oil Content at 21°C (70°F)	Filtration Efficiency	Initial Dry Differential Pressure	Initial Saturated Differential Pressure	Change Element Every	Precede with Filtration Grade
AO	Coalescing & Dry Particulate	Down to 1 micron	0.5 mg/m³ 0.5 ppm(w)	99.925%	<70 mbar (<1 psi)	<140 mbar (<2 psi)	12 months	-
AA	Coalescing & Dry Particulate	Down to 0.01 micron	0.01 mg/m³ 0.01 ppm(w)	99.9999%	<140 mbar (<1.5 psi)	<200 mbar (<3 psi)	12 months	AO
ACS	Oil Vapour Reduction	N/A	0.003 mg/m³ 0.003 ppm(w)	N/A	<140 mbar (<1.5 psi)	N/A	When oil vapour is detected	AO+AA

Important Note:

Using the same filter housings as their coalescing and dry particulate counterparts, Grade ACS filter elements differ in that they utilise a wrapped bed of carbon cloth to adsorb oil vapour. It is important to note, in-line adsorption filter elements have a different life span compared to coalescing and dry particulate filters and require more frequent element changes.

Technical Data

Filtration Grade	Filter Models	Minimum Operating Pressure		Maximum Operating Pressure		Minimum Operating Temperature		Maximum Operating Temperature	
		bar g	psi g	bar g	psi g	°C	°F	°C	°F
AO/AA	0003G	1	14.5	10	145	2	35	50	122
ACS	0003G	1	14.5	10	145	2	35	30	86

Flow Rates

Model	Pipe Size	L/S	m³/min	m³/hr	cfm	Replacement Element	No.
AO-0003G	8mm Push In	3	0.18	11	6	K003AO	1
AA-0003G	8mm Push In	3	0.18	11	6	K003AA	1
ACS-0003G	8mm Push In	3	0.18	11	6	K003ACS	1

All models include a manual / constant bleed drain

Stated flows are for operation at 7 bar (g) (102 psi g) with reference to 20°C, 1 bar (a), 0% relative water vapour pressure. For flows at other pressures, apply the correction factors shown below.


Product Selection & Correction Factors

To correctly select a filter model, the flow rate of the filter must be adjusted for the minimum operating (inlet) pressure at the point of installation.

1. Obtain the minimum operating (inlet) pressure and maximum compressed air flow rate at the inlet of the filter.
2. Select the correction factor for minimum inlet pressure from the CFMIP table (always round down e.g. for 5.3 bar, use 5 bar correction factor)
3. Calculate the minimum filtration capacity. Minimum Filtration Capacity = Compressed Air Flow Rate x CFP
4. Using the minimum filtration capacity, select a filter model from the flow rate tables above (filter selected must have a flow rate equal to or greater than the minimum filtration capacity).

CFMIP - Correction Factor Minimum Inlet Pressure

Minimum Inlet Pressure	bar g	1	2	3	4	5	6	7	8	9	10
	psi g	15	29	44	58	73	87	100	116	131	145
Correction Factor		2.65	1.87	1.53	1.32	1.18	1.08	1.00	0.94	0.88	0.84

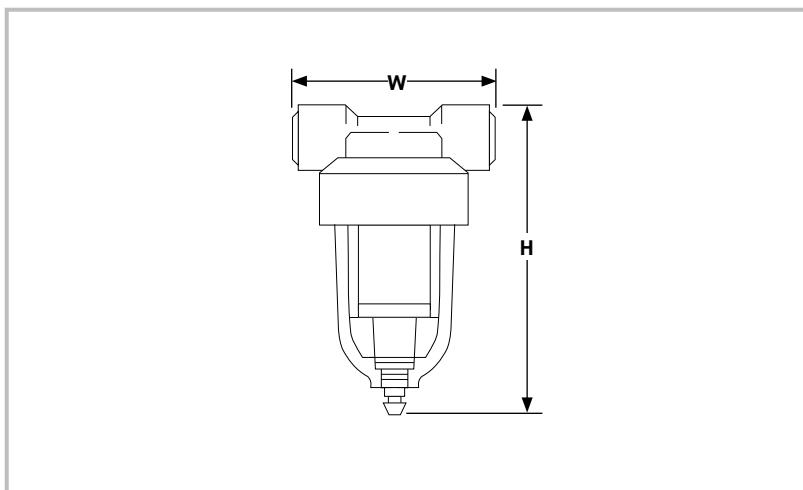

Weight & Dimensions

Model	Height (H)		Width (W)		Depth (D)		Weight	
	mm	ins	mm	ins	mm	ins	kg	lbs
0003G	89	3.5	58	2.3	56	2.2	0.1	0.2

Parker Catalogue Numbers

Model	Catalogue Number General Purpose Coalescing Filters	Catalogue Number General Purpose Dry Particulate Filters
0003G	AO-0003G	AA-0003G

OIL-X Filter Accessories

Filter Wall Mount Brackets

(for single filters)

Part Number	Filter Model / Number of
MBK1-1	010 x 1
MBK2-1	015-020 x 1
MBK3-1	025-030 x 1
MBK4-1	035-045 x 1
MBK5-1	050-055 x 1

Filter Wall Mount Brackets

(for 2 or 3 in series)

Part Number	Filter Model / Number of
MBK1-2	010 x 2 and x 3
MBK2-2	015-020 x 2 and x 3
MBK3-2	025 - 030 x 2 and x 3
MBK4-2	035 - 045 x 2 and x 3
MBK5-2	050 - 055 x 2 and x 3

Unless stated otherwise all differential pressure monitors, gauges and drains have a maximum operating pressure of 16 bar g.

Tie Rods

(for 2 or 3 in series)

Part Number	Filter Model / Number of
TRK1-2	010 x 2 and x 3
TRK3-2	015 to 020 x 2 and x 3
TRK2-2	025 to 030 x 2 and x 3
TRK4-2	035 to 045 x 2 and x 3
TRK5-2	050 to 055 x 2 and x 3

Automatic Float and Manual Drains

Part Number	Description
M12.FD.0001	Float Auto 010-055
EM1	Manual Drain 010-055 (Maximum Operating Pressure 20 bar g)
HDF120A	Float Auto 060
605006470	Manual Drain 060

Zero Loss ED Electronic Drains

Part Number	Filter Model
ED3002-G230	010 to 030
ED3004-G230	035 to 055
ED3007-G230	60
MK-G15-G10I	ED3002 Mounting kit G½
MK-G25-G15	ED3004-3100 Mounting kit G½

Blanking Plate Kit

OIL-X 010 - 055 (AO, AA)

Part Number	601181213
Contents	
Blanking Plate (x1)	
M5 x 16mm bolts (x4)	
M5 Washer (x4)	
O-Ring (x2)	
Direction of Flow Label (x1)	
1/8" Blanking Plug (x2)	



K-MT Small Flow Heatless Adsorption Dryers

Dryer Performance

Dryer Models	Dewpoint (Standard)		ISO8573-1:2010 Classification (Standard)	Dewpoint (Option 1)		ISO8573-1:2010 Classification (Option 1)	Dewpoint (Option 2)		ISO8573-1:2010 Classification (Option 2)
	°C	°F		°C	°F		°C	°F	
K-MT 1 - 4	-40	-40	Class 2.2.2	-70	-100	Class 2.1.2	-25	-13	Class 2.3.2

ISO8573-1 Classifications when used with Parker OIL-X pre / post filtration

Technical Data

Dryer Models	Minimum Operating Pressure		Maximum Operating Pressure		Minimum Operating Temperature		Maximum Operating Temperature		Maximum Ambient Temperature		Electrical Supply (Standard)	Electrical Supply (Optional)	Thread Type	Noise Level
	bar g	psi g	bar g	psi g	°C	°F	°C	°F	°C	°F				
K-MT 1 - 4	4	58	16	232	5	41	50	122	50	122	230V 1ph 50/60Hz or 24V DC	115V 1ph 50/60Hz or 24V DC	BSPP	65-86

Flow Rates

Model	Pipe Size BSPP	Inlet Flow Rate				
		L/s	m³/min	m³/hr	cfm	
K-MT 1	1/4"	2	0.13	8	5	
K-MT 2	1/4"	4	0.25	15	9	
K-MT 3	1/4"	7	0.42	25	15	
K-MT 4	1/4"	10	0.58	35	21	

Inlet flow rate relating to 1 bar(a) and 20°C; relating to the suction performance of the compressor, compression at 7 bar(g) and 35°C dryer inlet temperature, at 25°C ambient temperature, 60 % relative humidity.

Product Selection & Correction Factors

For correct operation, compressed air dryers must be sized using for the maximum (summer) inlet temperature, maximum (summer) ambient temperature, minimum inlet pressure, required outlet dewpoint and maximum flow rate of the installation.

To select a dryer, first calculate the MDC (Minimum Drying Capacity) using the formula below then select a dryer from the flow rate table above with a flow rate equal to or above the MDC.

Minimum Drying Capacity = System Flow x CFIT x CFAT x CFMIP x CFOD

CFIT - Correction Factor Maximum Inlet Temperature

Maximum Inlet Temperature	°C	25	30	35	40	45	50
	°F	77	86	95	104	113	122
Correction Factor		0.94	0.95	1.00	1.15	1.22	1.28

CFAT - Correction Factor Maximum Ambient Temperature


Maximum Ambient Temperature	°C	25	30	35	40	45	50
	°F	77	86	95	104	113	122
Correction Factor		1.00	1.00	1.00	1.00	1.00	1.00

CFMIP - Correction Factor Minimum Inlet Pressure

Minimum Inlet Pressure	bar g	4	5	6	7	8	9	10	11	12	13	14	15	16
	psi g	58	73	87	100	116	131	145	160	174	189	203	218	232
Correction Factor		1.60	1.33	1.12	1.00	0.88	0.79	0.76	0.74	0.67	0.62	0.59	0.56	0.53

CFOD - Correction Factor Outlet Dewpoint

Outlet Dewpoint	°C	-25	-40	-70
	°F	-13	-40	-100
Correction Factor		1.00	1.00	2.00

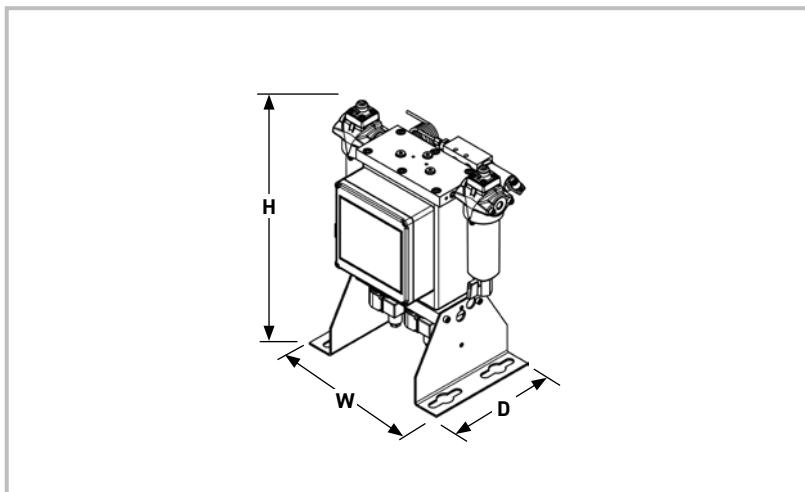

Weights & Dimensions

Model	Dimensions						Weight	
	Height (H)		Width (W)		Depth (D)			
	mm	ins	mm	ins	mm	ins	kg	lbs
K-MT 1	403	16	345	14	210	8	11.5	25
K-MT 2	578	23	345	14	210	8	15.5	34
K-MT 3	828	33	345	14	210	8	20.0	44
K-MT 4	1078	42	345	14	210	8	25.0	55

Included Filtration

Model	Dryer Inlet		Dryer Outlet			High Efficiency Dry Particulate Filter (Option)
	High Efficiency Filter	General Purpose Dry Particulate Filter	Oil Vapour Reduction Filter (Option)	High Efficiency Dry Particulate Filter (Option)	High Efficiency Dry Particulate Filter (Option)	
K-MT 1	AAPX010A	AOPX010A	ACSPX010A	AAPX010A	AAPX010A	
K-MT 2	AAPX010A	AOPX010A	ACSPX010A	AAPX010A	AAPX010A	
K-MT 3	AAPX010A	AOPX010A	ACSPX010A	AAPX010A	AAPX010A	
K-MT 4	AAPX010A	AOPX010A	ACSPX010A	AAPX010A	AAPX010A	

Parker Catalogue Numbers

230V/1ph/50Hz-60Hz

For Dryer Model	Catalogue Number No Dewpoint Sensor	Catalogue Number With Dewpoint Sensor
K-MT 1	K1/16D3-G230M	K1/16D3-G230MT
K-MT 2	K2/16D3-G230M	K2/16D3-G230MT
K-MT 3	K3/16D3-G230M	K3/16D3-G230MT
K-MT 4	K4/16D3-G230M	K4/16D3-G230MT

KA-MT Small Flow Heatless Adsorption Dryers

Dryer Performance

Dryer Models	Dewpoint (Standard)		ISO8573-1:2010 Classification (Standard)	Dewpoint (Option 1)		ISO8573-1:2010 Classification (Option 1)	Dewpoint (Option 2)		ISO8573-1:2010 Classification (Option 2)
	°C	°F		°C	°F		°C	°F	
KA-MT 1 - 4	-40	-40	Class 2.2.1	-70	-100	Class 2.1.1	-25	-13	Class 2.3.1

Technical Data

Dryer Models	Minimum Operating Pressure		Maximum Operating Pressure		Minimum Operating Temperature		Maximum Operating Temperature		Maximum Ambient Temperature		Electrical Supply (Standard)	Electrical Supply (Optional)	Thread Type	Noise Level
	bar g	psi g	bar g	psi g	°C	°F	°C	°F	°C	°F				
KA-MT 1 - 4	4	58	16	232	5	41	50	122	50	122	230V 1ph 50/60Hz or 24V DC	115V 1ph 50/60Hz or 24V DC	BSPP	65-86

Flow Rates

Model	Pipe Size BSPP	Inlet Flow Rate				Inlet flow rate relating to 1 bar(a) and 20 °C; relating to the suction performance of the compressor, compression at 7 bar(g) and 35 °C dryer inlet temperature, at 25 °C ambient temperature, 60 % relative humidity.
		L/s	m³/min	m³/hr	cfm	
KA-MT 1	1/4"	2	0.13	8	5	
KA-MT 2	1/4"	4	0.25	15	9	
KA-MT 3	1/4"	7	0.42	25	15	
KA-MT 4	1/4"	10	0.58	35	21	

Product Selection & Correction Factors

For correct operation, compressed air dryers must be sized using for the maximum (summer) inlet temperature, maximum (summer) ambient temperature, minimum inlet pressure, required outlet dewpoint and maximum flow rate of the installation.

To select a dryer, first calculate the MDC (Minimum Drying Capacity) using the formula below then select a dryer from the flow rate table above with a flow rate equal to or above the MDC.

$$\text{Minimum Drying Capacity} = \text{System Flow} \times \text{CFIT} \times \text{CFAT} \times \text{CFMIP} \times \text{CFOD}$$

CFIT - Correction Factor Maximum Inlet Temperature

Maximum Inlet Temperature	°C	25	30	35	40	45	50
	°F	77	86	95	104	113	122
Correction Factor		0.94	0.95	1.00	1.15	1.22	1.28

CFAT - Correction Factor Maximum Ambient Temperature


Maximum Ambient Temperature	°C	25	30	35	40	45	50
	°F	77	86	95	104	113	122
Correction Factor		1.00	1.00	1.00	1.00	1.00	1.00

CFMIP - Correction Factor Minimum Inlet Pressure

Minimum Inlet Pressure	bar g	4	5	6	7	8	9	10	11	12	13	14	15	16
	psi g	58	73	87	100	116	131	145	160	174	189	203	218	232
Correction Factor		1.60	1.33	1.12	1.00	0.88	0.79	0.76	0.74	0.67	0.62	0.59	0.56	0.53

CFOD - Correction Factor Outlet Dewpoint

Outlet Dewpoint	°C	-25	-40	-70
	°F	-13	-40	-100
Correction Factor		1.00	1.00	2.00

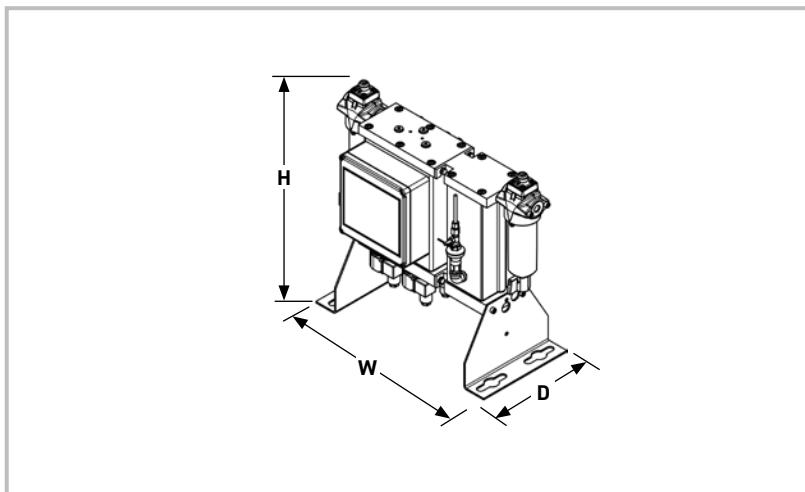

Weights & Dimensions

Model	Dimensions						Weight	
	Height (H)		Width (W)		Depth (D)			
	mm	ins	mm	ins	mm	ins	kg	lbs
KA-MT 1	403	16	486	19	210	8	15	33
KA-MT 2	578	23	477	19	210	8	20	44
KA-MT 3	828	33	577	23	210	8	28	62
KA-MT 4	1078	42	577	23	210	8	35	77

Included Filtration

Model	Dryer Inlet	Dryer Outlet	
	High Efficiency Filter	General Purpose Dry Particulate Filter	High Efficiency Dry Particulate Filter (Option)
KA-MT 1	AAPX010A	AOPX010A	AAPX010A
KA-MT 2	AAPX010A	AOPX010A	AAPX010A
KA-MT 3	AAPX010A	AOPX010A	AAPX010A
KA-MT 4	AAPX010A	AOPX010A	AAPX010A

Parker Catalogue Numbers

230V/1ph/50Hz-60Hz

For Dryer Model	Catalogue Number No Dewpoint Sensor	Catalogue Number With Dewpoint Sensor
KA-MT 1	K1/16DA3-G230M	K1/16DA3-G230MT
KA-MT 2	K2/16DA3-G230M	K2/16DA3-G230MT
KA-MT 3	K3/16DA3-G230M	K3/16DA3-G230MT
KA-MT 4	K4/16DA3-G230M	K4/16DA3-G230MT

CDAS Medium Flow Heatless Adsorption Dryers

Dryer Performance

Dryer Models	Dewpoint (Standard)		ISO8573-1:2010 Classification (Standard)		Dewpoint (Option 1)		ISO8573-1:2010 Classification (Option 1)		Dewpoint (Option 2)		ISO8573-1:2010 Classification (Option 2)	
	°C	°F	°C	°F	°C	°F	°C	°F	°C	°F	°C	°F
CDAS HL	-40	-40	Class 2.2.2		-70	-100	Class 2.1.2		-20	-4	Class 2.3.2	

ISO8573-1 Classifications when used with OIL-X pre / post filtration

Technical Data

Dryer Models	Minimum Operating Pressure		Maximum Operating Pressure		Minimum Operating Temperature		Maximum Operating Temperature		Maximum Ambient Temperature		Electrical Supply (Standard)	Electrical Supply (Optional)	Thread Type	Noise Level
	bar g	psi g	bar g	psi g	°C	°F	°C	°F	°C	°F				
CDAS HL 050 - 085	4	58	16	232	5	41	50	122	55	131	100-240V (+/-10%) 1ph 50/60Hz	24V DC	BSPP or NPT	<75

Flow Rates

Model	Pipe Size BSPP or NPT	Inlet Flow Rate			
		L/s	m³/min	m³/hr	cfm
CDAS HL 050	1/2"	15	0.92	55	32
CDAS HL 055	1/2"	19	1.17	70	41
CDAS HL 060	1/2"	25	1.50	90	53
CDAS HL 065	1/2"	31	1.84	110	65
CDAS HL 070	3/4"	42	2.51	150	88
CDAS HL 075	1"	51	3.09	185	109
CDAS HL 080	1"	61	3.67	220	129
CDAS HL 085	1 1/2"	83	5.01	300	177

Stated flows are for operation at 7 bar (g) (102 psi g) with reference to 20°C, 1 bar (a), 0% relative water vapour pressure. For flows at other pressures, apply the correction factors shown below.

Product Selection & Correction Factors

For correct operation, compressed air dryers must be sized using for the maximum (summer) inlet temperature, maximum (summer) ambient temperature, minimum inlet pressure, required outlet dewpoint and maximum flow rate of the installation.

To select a dryer, first calculate the MDC (Minimum Drying Capacity) using the formula below then select a dryer from the flow rate table above with a flow rate equal to or above the MDC.

Minimum Drying Capacity = System Flow x CFMIT x CFMAT x CFMIP x CFOD

CFMIT - Correction Factor Maximum Inlet Temperature

Maximum Inlet Temperature	°C	25	30	35	40	45	50
	°F	77	86	95	104	113	122
Correction Factor		1.00	1.00	1.00	1.04	1.14	1.37

CFMAT - Correction Factor Maximum Ambient Temperature


Maximum Ambient Temperature	°C	25	30	35	40	45	50
	°F	77	86	95	104	113	122
Correction Factor		1.00	1.00	1.00	1.00	1.00	1.00

CFMIP - Correction Factor Minimum Inlet Pressure

Minimum Inlet Pressure	bar g	4	5	6	7	8	9	10	11	12	13	14	15	16
	psi g	58	73	87	100	116	131	145	160	174	189	203	218	232
Correction Factor		1.60	1.33	1.14	1.00	0.89	0.80	0.73	0.67	0.62	0.57	0.53	0.50	0.47

CFOD - Correction Factor Outlet Dewpoint

Outlet Dewpoint	°C	-20	-40	-70
	°F	-4	-40	-100
Correction Factor		0.91	1.00	2.00

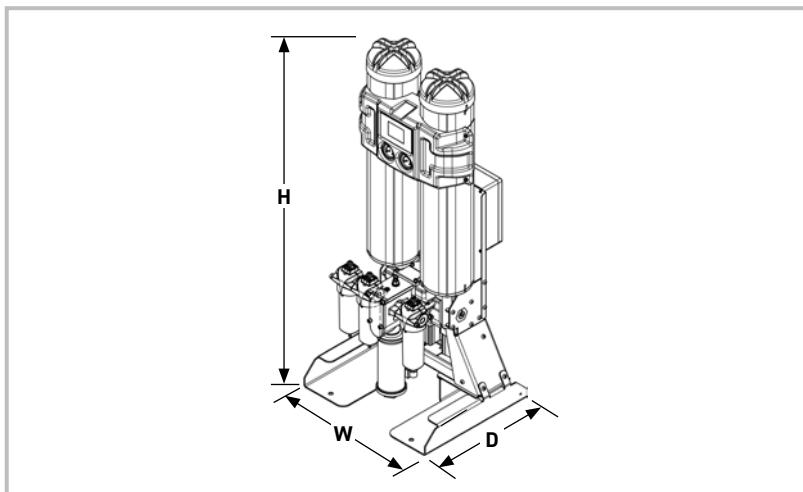

Weights & Dimensions

Model	Dimensions						Weight	
	Height (H)		Width (W)		Depth (D)			
	mm	ins	mm	ins	mm	ins	kg	lbs
CDAS HL 050	1133	45	559	22	490	19	76	168
CDAS HL 055	1313	52	559	22	490	19	84	185
CDAS HL 060	1510	59	559	22	490	19	93	205
CDAS HL 065	1660	65	559	22	490	19	100	220
CDAS HL 070	2020	80	559	22	490	19	120	265
CDAS HL 075	1595	63	559	22	682	27	165	364
CDAS HL 080	1745	69	559	22	682	27	180	397
CDAS HL 085	2105	83	559	22	682	27	210	463

Included Filtration

Model	Pipe Size BSPP or NPT	Dryer Inlet		Dryer Outlet		
		General Purpose Pre-filter	High Efficiency Filter	Oil Vapour Reduction Filter	General Purpose Dry Particulate Filter	High Efficiency Dry Particulate Filter
CDAS HL 050	1/2"	AOPX015C	AAPX015C	-	AOPX015C	-
CDAS HL 055	1/2"	AOPX015C	AAPX015C	-	AOPX015C	-
CDAS HL 060	1/2"	AOPX020C	AAPX020C	-	AOPX020C	-
CDAS HL 065	1/2"	AOPX020C	AAPX020C	-	AOPX020C	-
CDAS HL 070	3/4"	AOPX025D	AAPX025D	-	AOPX025D	-
CDAS HL 075	1"	AOPX025E	AAPX025E	-	AOPX025E	-
CDAS HL 080	1"	AOPX025E	AAPX025E	-	AOPX025E	-
CDAS HL 085	1 1/2"	AOPX030G	AAPX030G	-	AOPX030G	-

Parker Catalogue Numbers

Model	Catalogue Number -20°C PDP / -40°C PDP BSPP	Catalogue Number -70°C PDP BSPP	Catalogue Number -20°C PDP / -40°C PDP NPT	Catalogue Number -70°C PDP NPT
CDAS HL 50	CDASHL050-40G16AE	CDASHL050-70G16AE	CDASHL050-40N16AE	CDASHL050-70N16AE
CDAS HL 55	CDASHL055-40G16AE	CDASHL055-70G16AE	CDASHL055-40N16AE	CDASHL055-70N16AE
CDAS HL 60	CDASHL060-40G16AE	CDASHL060-70G16AE	CDASHL060-40N16AE	CDASHL060-70N16AE
CDAS HL 65	CDASHL065-40G16AE	CDASHL065-70G16AE	CDASHL065-40N16AE	CDASHL065-70N16AE
CDAS HL 70	CDASHL070-40G16AE	CDASHL070-70G16AE	CDASHL070-40N16AE	CDASHL070-70N16AE
CDAS HL 75	CDASHL075-40G16AE	CDASHL075-70G16AE	CDASHL075-40N16AE	CDASHL075-70N16AE
CDAS HL 80	CDASHL080-40G16AE	CDASHL080-70G16AE	CDASHL080-40N16AE	CDASHL080-70N16AE
CDAS HL 85	CDASHL085-40G16AE	CDASHL085-70G16AE	CDASHL085-40N16AE	CDASHL085-70N16AE

OFAS Medium Flow Heatless Adsorption Dryers

Dryer Performance

Dryer Models	Dewpoint (Standard)		ISO8573-1:2010 Classification (Standard)		Dewpoint (Option 1)		ISO8573-1:2010 Classification (Option 1)		Dewpoint (Option 2)		ISO8573-1:2010 Classification (Option 2)	
	°C	°F			°C	°F			°C	°F		
OFAS HL	-40	-40	Class 2.2.0		-70	-100	Class 2.1.0		-20	-4	Class 2.3.0	

ISO8573-1 Classifications when used with OIL-X pre / post filtration

Technical Data

Dryer Models	Minimum Operating Pressure		Maximum Operating Pressure		Minimum Operating Temperature		Maximum Operating Temperature		Maximum Ambient Temperature		Electrical Supply (Standard)	Electrical Supply (Optional)	Thread Type	Noise Level
	bar g	psi g	bar g	psi g	°C	°F	°C	°F	°C	°F				
OFAS HL 050 ~ 085	4	58	16	232	5	41	50	122	55	131	100-240V (+/-10%) 1ph 50/60Hz	24V DC	BSPP or NPT	<75

Flow Rates

Model	Pipe Size BSPP or NPT	Inlet Flow Rate			
		L/s	m³/min	m³/hr	cfm
OFAS HL 050	½"	15	0.92	55	32
OFAS HL 055	½"	19	1.17	70	41
OFAS HL 060	½"	25	1.50	90	53
OFAS HL 065	½"	31	1.84	110	65
OFAS HL 070	¾"	42	2.51	150	88
OFAS HL 075	1"	51	3.09	185	109
OFAS HL 080	1"	61	3.67	220	129
OFAS HL 085	1½"	83	5.01	300	177

Stated flows are for operation at 7 bar (g) (102 psi g) with reference to 20°C, 1 bar (a), 0% relative water vapour pressure. For flows at other pressures, apply the correction factors shown below.

Product Selection & Correction Factors

For correct operation, compressed air dryers must be sized using for the maximum (summer) inlet temperature, maximum (summer) ambient temperature, minimum inlet pressure, required outlet dewpoint and maximum flow rate of the installation.

To select a dryer, first calculate the MDC (Minimum Drying Capacity) using the formula below then select a dryer from the flow rate table above with a flow rate equal to or above the MDC.

Minimum Drying Capacity = System Flow x CFMIT x CFMAT x CFMIP x CFOD

CFMIT - Correction Factor Maximum Inlet Temperature

Maximum Inlet Temperature	°C	25	30	35	40	45	50
	°F	77	86	95	104	113	122
Correction Factor		1.00	1.00	1.00	1.04	1.14	1.37

CFMAT - Correction Factor Maximum Ambient Temperature


Maximum Ambient Temperature	°C	25	30	35	40	45	50
	°F	77	86	95	104	113	122
Correction Factor		1.00	1.00	1.00	1.00	1.00	1.00

CFMIP - Correction Factor Minimum Inlet Pressure

Minimum Inlet Pressure	bar g	4	5	6	7	8	9	10	11	12	13	14	15	16
	psi g	58	73	87	100	116	131	145	160	174	189	203	218	232
Correction Factor		1.60	1.33	1.14	1.00	0.89	0.80	0.73	0.67	0.62	0.57	0.53	0.50	0.47

CFOD - Correction Factor Outlet Dewpoint

Outlet Dewpoint	°C	-20	-40	-70
	°F	-4	-40	-100
Correction Factor		0.91	1.00	2.00

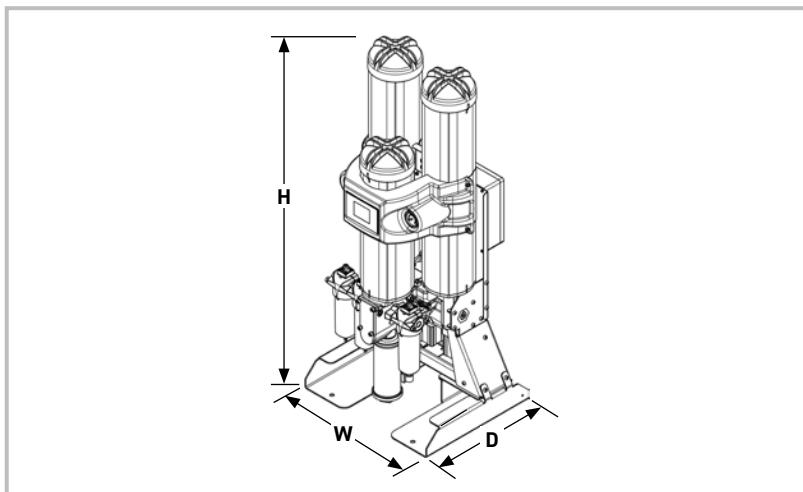

Weights & Dimensions

Model	Dimensions						Weight	
	Height (H)		Width (W)		Depth (D)			
	mm	ins	mm	ins	mm	ins	kg	lbs
OFAS HL 050	1133	45	559	22	512	20.2	90	198
OFAS HL 055	1313	52	559	22	512	20.2	97	214
OFAS HL 060	1510	59	559	22	496	19.5	106	234
OFAS HL 065	1660	65	559	22	496	19.5	112	247
OFAS HL 070	2020	80	559	22	496	19.5	132	291
OFAS HL 075	1595	63	559	22	682	27	184	406
OFAS HL 080	1745	69	559	22	682	27	196	432
OFAS HL 085	2105	83	559	22	682	27	232	511

Included Filtration

Model	Pipe Size BSPP or NPT	Dryer Inlet		Dryer Outlet		
		General Purpose Pre-filter	High Efficiency Filter	Oil Vapour Reduction Filter	General Purpose Dry Particulate Filter	High Efficiency Dry Particulate Filter
OFAS HL 050	1/2"	AOPX015C	AAPX015C	Included	AOPX015C	-
OFAS HL 055	1/2"	AOPX015C	AAPX015C	Included	AOPX015C	-
OFAS HL 060	1/2"	AOPX020C	AAPX020C	Included	AOPX020C	-
OFAS HL 065	1/2"	AOPX020C	AAPX020C	Included	AOPX020C	-
OFAS HL 070	3/4"	AOPX025D	AAPX025D	Included	AOPX025D	-
OFAS HL 075	1"	AOPX025E	AAPX025E	Included	AOPX025E	-
OFAS HL 080	1"	AOPX025E	AAPX025E	Included	AOPX025E	-
OFAS HL 085	1 1/2"	AOPX030G	AAPX030G	Included	AOPX030G	-

Parker Catalogue Numbers

Model	Catalogue Number -20°C PDP / -40°C PDP BSPP	Catalogue Number -70°C PDP BSPP	Catalogue Number -20°C PDP / -40°C PDP NPT	Catalogue Number -70°C PDP NPT
OFAS HL 50	OFASHL050-40G16AE	OFASHL050-70G16AE	OFASHL050-40N16AE	OFASHL050-70N16AE
OFAS HL 55	OFASHL055-40G16AE	OFASHL055-70G16AE	OFASHL055-40N16AE	OFASHL055-70N16AE
OFAS HL 60	OFASHL060-40G16AE	OFASHL060-70G16AE	OFASHL060-40N16AE	OFASHL060-70N16AE
OFAS HL 65	OFASHL065-40G16AE	OFASHL065-70G16AE	OFASHL065-40N16AE	OFASHL065-70N16AE
OFAS HL 70	OFASHL070-40G16AE	OFASHL070-70G16AE	OFASHL070-40N16AE	OFASHL070-70N16AE
OFAS HL 75	OFASHL075-40G16AE	OFASHL075-70G16AE	OFASHL075-40N16AE	OFASHL075-70N16AE
OFAS HL 80	OFASHL080-40G16AE	OFASHL080-70G16AE	OFASHL080-40N16AE	OFASHL080-70N16AE
OFAS HL 85	OFASHL085-40G16AE	OFASHL085-70G16AE	OFASHL085-40N16AE	OFASHL085-70N16AE

FBP Medium Flow Heatless Adsorption Dryers

Dryer Performance

Dryer Models	Dewpoint (Standard)		ISO8573-1:2010 Classification (Standard)		Dewpoint (Option 1)		ISO8573-1:2010 Classification (Option 1)		Dewpoint (Option 2)		ISO8573-1:2010 Classification (Option 2)	
	°C	°F			°C	°F			°C	°F		
FBP HL	-40	-40	Class 1.2.0		-70	-100	Class 2.1.0		-20	-4	Class 1.3.0	

ISO8573-1 Classifications when used with OIL-X pre / post filtration

Technical Data

Dryer Models	Minimum Operating Pressure		Maximum Operating Pressure		Minimum Operating Temperature		Maximum Operating Temperature		Maximum Ambient Temperature		Electrical Supply (Standard)	Electrical Supply (Optional)	Thread Type	Noise Level
	bar g	psi g	bar g	psi g	°C	°F	°C	°F	°C	°F				
FBP HL 050 ~ 085	4	58	16	232	5	41	50	122	55	131	100-240V (+/-10%) 1ph 50/60Hz	24V DC	BSPP or NPT	<75

Flow Rates

Model	Pipe Size BSPP or NPT	Inlet Flow Rate			
		L/s	m³/min	m³/hr	cfm
FBP HL 050	1/2"	15	0.92	55	32
FBP HL 055	1/2"	19	1.17	70	41
FBP HL 060	1/2"	25	1.50	90	53
FBP HL 065	1/2"	31	1.84	110	65
FBP HL 070	3/4"	42	2.51	150	88
FBP HL 075	1"	51	3.09	185	109
FBP HL 080	1"	61	3.67	220	129
FBP HL 085	1 1/2"	83	5.01	300	177

Stated flows are for operation at 7 bar (g) (102 psi g) with reference to 20°C, 1 bar (a), 0% relative water vapour pressure. For flows at other pressures, apply the correction factors shown below.

Product Selection & Correction Factors

For correct operation, compressed air dryers must be sized using for the maximum (summer) inlet temperature, maximum (summer) ambient temperature, minimum inlet pressure, required outlet dewpoint and maximum flow rate of the installation.

To select a dryer, first calculate the MDC (Minimum Drying Capacity) using the formula below then select a dryer from the flow rate table above with a flow rate equal to or above the MDC.

Minimum Drying Capacity = System Flow x CFMIT x CFMAT x CFMIP x CFOD

CFMIT - Correction Factor Maximum Inlet Temperature

Maximum Inlet Temperature	°C	25	30	35	40	45	50
	°F	77	86	95	104	113	122
Correction Factor		1.00	1.00	1.00	1.04	1.14	1.37

CFMAT - Correction Factor Maximum Ambient Temperature


Maximum Ambient Temperature	°C	25	30	35	40	45	50
	°F	77	86	95	104	113	122
Correction Factor		1.00	1.00	1.00	1.00	1.00	1.00

CFMIP - Correction Factor Minimum Inlet Pressure

Minimum Inlet Pressure	bar g	4	5	6	7	8	9	10	11	12	13	14	15	16
	psi g	58	73	87	100	116	131	145	160	174	189	203	218	232
Correction Factor		1.60	1.33	1.14	1.00	0.89	0.80	0.73	0.67	0.62	0.57	0.53	0.50	0.47

CFOD - Correction Factor Outlet Dewpoint

Outlet Dewpoint	°C	-20	-40	-70
	°F	-4	-40	-100
Correction Factor		0.91	1.00	2.00

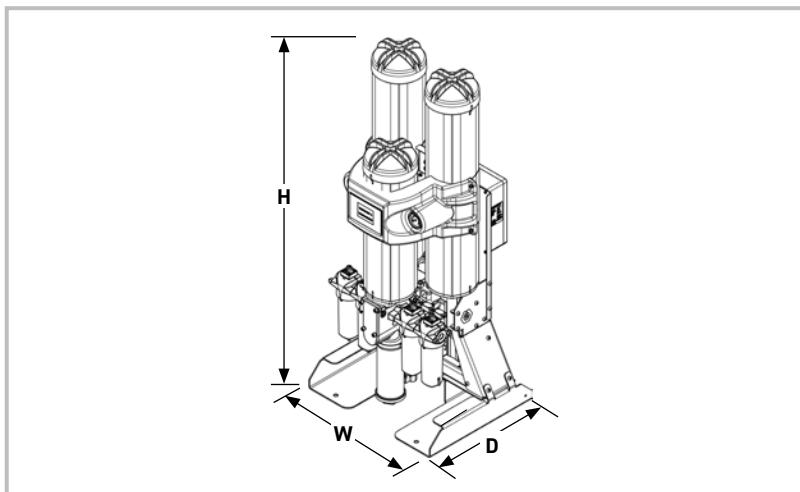

Weights & Dimensions

Model	Dimensions						Weight	
	Height (H)		Width (W)		Depth (D)			
	mm	ins	mm	ins	mm	ins	kg	lbs
FBP HL 050	1133	45	559	22	512	20.2	91	201
FBP HL 055	1313	52	559	22	512	20.2	98	216
FBP HL 060	1510	59	559	22	496	19.5	108	238
FBP HL 065	1660	65	559	22	496	19.5	114	251
FBP HL 070	2020	80	630	24.8	496	19.5	136	300
FBP HL 075	1595	63	630	24.8	682	27	184	406
FBP HL 080	1745	69	630	24.8	682	27	196	432
FBP HL 085	2105	83	630	24.8	682	27	232	511

Included Filtration

Model	Pipe Size BSPP or NPT	Dryer Inlet		Dryer Outlet		
		General Purpose Pre-filter	High Efficiency Filter	Oil Vapour Reduction Filter	General Purpose Dry Particulate Filter	High Efficiency Dry Particulate Filter
FBP HL 050	1/2"	AOPX015C	AAPX015C	Included	AOPX015C	AAPX015C
FBP HL 055	1/2"	AOPX015C	AAPX015C	Included	AOPX015C	AAPX015C
FBP HL 060	1/2"	AOPX020C	AAPX020C	Included	AOPX020C	AAPX020C
FBP HL 065	1/2"	AOPX020C	AAPX020C	Included	AOPX020C	AAPX020C
FBP HL 070	3/4"	AOPX025D	AAPX025D	Included	AOPX025D	AAPX025D
FBP HL 075	1"	AOPX025E	AAPX025E	Included	AOPX025E	AAPX025E
FBP HL 080	1"	AOPX025E	AAPX025E	Included	AOPX025E	AAPX025E
FBP HL 085	1 1/2"	AOPX030G	AAPX030G	Included	AOPX030G	AAPX030G

Parker Catalogue Numbers

Model	Catalogue Number -20°C PDP / -40°C PDP BSPP	Catalogue Number -70°C PDP BSPP
FBP HL 050	FBPHL050-40G16AE	FBPHL050-70G16AE
FBP HL 055	FBPHL055-40G16AE	FBPHL055-70G16AE
FBP HL 060	FBPHL060-40G16AE	FBPHL060-70G16AE
FBP HL 065	FBPHL065-40G16AE	FBPHL065-70G16AE
FBP HL 070	FBPHL070-40G16AE	FBPHL070-70G16AE
FBP HL 075	FBPHL075-40G16AE	FBPHL075-70G16AE
FBP HL 080	FBPHL080-40G16AE	FBPHL080-70G16AE
FBP HL 085	FBPHL085-40G16AE	FBPHL085-70G16AE

CDAS HL ATEX Medium Flow Heatless Adsorption Dryers

Dryer Performance

Dryer Models	Dewpoint (Standard)		ISO8573-1:2010 Classification (Standard)	
	°C	°F		
CDAS HL ATEX	-40	-40	Class 2.2.2	

ISO8573-1 Classifications when used with OIL-X pre / post filtration

Technical Data

Dryer Models	Minimum Operating Pressure		Maximum Operating Pressure		Minimum Operating Temperature		Maximum Operating Temperature		Maximum Ambient Temperature		Electrical Supply	Thread Type	Noise Level
	bar g	psi g	bar g	psi g	°C	°F	°C	°F	°C	°F			dB(A)
CDAS HL ATEX	4	58	16	232	5	41	50	122	55	131	Not Applicable - Fully Pneumatic Operation	BSPP or NPT	<75

Flow Rates

Model	Pipe Size BSPP or NPT	Inlet Flow Rate			
		L/s	m³/min	m³/hr	cfm
CDAS HL 050 ATEX	1/2"	15	0.92	55	32
CDAS HL 055 ATEX	1/2"	19	1.17	70	41
CDAS HL 060 ATEX	1/2"	25	1.50	90	53
CDAS HL 065 ATEX	1/2"	31	1.84	110	65
CDAS HL 070 ATEX	3/4"	42	2.51	150	88
CDAS HL 075 ATEX	1"	51	3.09	185	109
CDAS HL 080 ATEX	1"	61	3.67	220	129
CDAS HL 085 ATEX	1 1/2"	83	5.01	300	177

Stated flows are for operation at 7 bar (g) (102 psi g) with reference to 20°C, 1 bar (a), 0% relative water vapour pressure. For flows at other pressures, apply the correction factors shown below.

Product Selection & Correction Factors

For correct operation, compressed air dryers must be sized using for the maximum (summer) inlet temperature, maximum (summer) ambient temperature, minimum inlet pressure, required outlet dewpoint and maximum flow rate of the installation.

To select a dryer, first calculate the MDC (Minimum Drying Capacity) using the formula below then select a dryer from the flow rate table above with a flow rate equal to or above the MDC.

$$\text{Minimum Drying Capacity} = \text{System Flow} \times \text{CFMIT} \times \text{CFMAT} \times \text{CFMIP} \times \text{CFOD}$$

CFMIT - Correction Factor Maximum Inlet Temperature

Maximum Inlet Temperature	°C	25	30	35	40	45	50
	°F	77	86	95	104	113	122
Correction Factor		1.00	1.00	1.00	1.04	1.14	1.37

CFMAT - Correction Factor Maximum Ambient Temperature


Maximum Ambient Temperature	°C	25	30	35	40	45	50
	°F	77	86	95	104	113	122
Correction Factor		1.00	1.00	1.00	1.00	1.00	1.00

CFMIP - Correction Factor Minimum Inlet Pressure

Minimum Inlet Pressure	bar g	4	5	6	7	8	9	10	11	12	13	14	15	16
	psi g	58	73	87	100	116	131	145	160	174	189	203	218	232
Correction Factor		1.60	1.33	1.14	1.00	0.89	0.80	0.73	0.67	0.62	0.57	0.53	0.50	0.47

CFOD - Correction Factor Outlet Dewpoint

Outlet Dewpoint	°C	-20	-40	-70
	°F	-4	-40	-100
Correction Factor		0.91	1.00	2.00

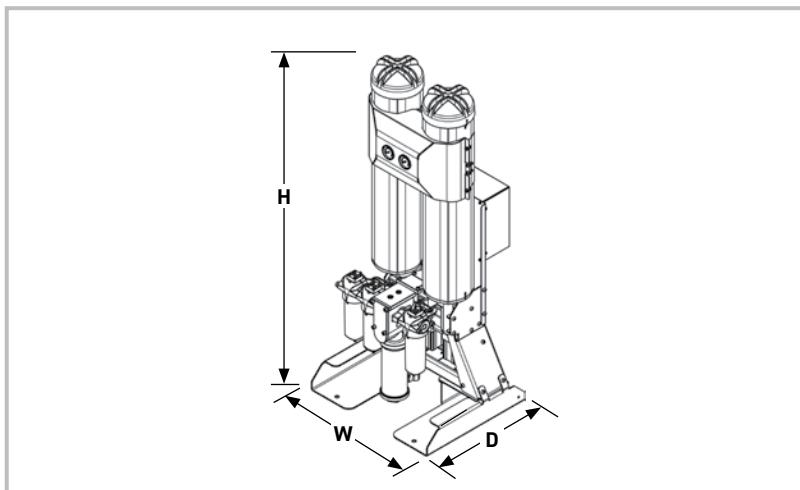

Weights & Dimensions

Model	Dimensions						Weight	
	Height (H)		Width (W)		Depth (D)			
	mm	ins	mm	ins	mm	ins	kg	lbs
CDAS HL 050 ATEX	1133	45	559	22	490	19	76	168
CDAS HL 055 ATEX	1313	52	559	22	490	19	84	185
CDAS HL 060 ATEX	1510	59	559	22	490	19	93	205
CDAS HL 065 ATEX	1660	65	559	22	490	19	100	220
CDAS HL 070 ATEX	2020	80	559	22	490	19	120	265
CDAS HL 075 ATEX	1595	63	559	22	682	27	165	364
CDAS HL 080 ATEX	1745	69	559	22	682	27	180	397
CDAS HL 085 ATEX	2105	83	559	22	682	27	210	463

Included Filtration

Model	Pipe Size BSPP or NPT	Dryer Inlet		Dryer Outlet		
		General Purpose Pre-filter	High Efficiency Filter	Oil Vapour Reduction Filter	General Purpose Dry Particulate Filter	High Efficiency Dry Particulate Filter
CDAS HL 050 ATEX	1/2"	AOPX015C	AAPX015C	-	AOPX015C	-
CDAS HL 055 ATEX	1/2"	AOPX015C	AAPX015C	-	AOPX015C	-
CDAS HL 060 ATEX	1/2"	AOPX020C	AAPX020C	-	AOPX020C	-
CDAS HL 065 ATEX	1/2"	AOPX020C	AAPX020C	-	AOPX020C	-
CDAS HL 070 ATEX	3/4"	AOPX025D	AAPX025D	-	AOPX025D	-
CDAS HL 075 ATEX	1"	AOPX025E	AAPX025E	-	AOPX025E	-
CDAS HL 080 ATEX	1"	AOPX025E	AAPX025E	-	AOPX025E	-
CDAS HL 085 ATEX	1 1/2"	AOPX030G	AAPX030G	-	AOPX030G	-

Parker Catalogue Numbers

Model	Catalogue Number -20°C PDP / -40°C PDP BSPP	Catalogue Number -70°C PDP BSPP
CDAS HL 050 ATEX	CDASHL050-40G16PP	CDASHL050-70G16PP
CDAS HL 055 ATEX	CDASHL055-40G16PP	CDASHL055-70G16PP
CDAS HL 060 ATEX	CDASHL060-40G16PP	CDASHL060-70G16PP
CDAS HL 065 ATEX	CDASHL065-40G16PP	CDASHL065-70G16PP
CDAS HL 070 ATEX	CDASHL070-40G16PP	CDASHL070-70G16PP
CDAS HL 075 ATEX	CDASHL075-40G16PP	CDASHL075-70G16PP
CDAS HL 080 ATEX	CDASHL080-40G16PP	CDASHL080-70G16PP
CDAS HL 085 ATEX	CDASHL085-40G16PP	CDASHL085-70G16PP

MX Large Flow Heatless Adsorption Dryers

Dryer Performance

Dryer Models	Dewpoint (Standard)		ISO8573-1:2010 Classification (Standard)		Dewpoint (Option 1)		ISO8573-1:2010 Classification (Option 1)		Dewpoint (Option 2)		ISO8573-1:2010 Classification (Option 2)	
	°C	°F	°C	°F	°C	°F	°C	°F	°C	°F	°C	°F
MXS DS	-40	-40	Class 2.2.2		-70	-100	Class 2.1.2		-20	-4	Class 2.3.2	

ISO8573-1 Classifications when used with OIL-X pre / post filtration

Technical Data

Dryer Models	Minimum Operating Pressure		Maximum Operating Pressure		Minimum Operating Temperature		Maximum Operating Temperature		Maximum Ambient Temperature		Electrical Supply (Standard)	Electrical Supply (Optional)	Thread Type	Noise Level
	bar g	psi g	bar g	psi g	°C	°F	°C	°F	°C	°F				
MXS102CDS ~ MXS108DS	4	58	13	190	5	41	50	122	55	131	100-240V (+/-10%) 1ph 50/60Hz	N/A	BSPP or NPT	<75

Flow Rates (Single Banks)

Model	Pipe Size	Inlet Flow Rate			
		L/s	m³/min	m³/hr	cfm
MXS102CDS	2"	113	6.81	408	240
MXS103CDS	2"	170	10.22	612	360
MXS103DS	2"	213	12.75	765	450
MXS104DS	2½"	283	17	1020	600
MXS105DS	2½"	354	21	1275	750
MXS106DS	2½"	425	26	1530	900
MXS107DS	2½"	496	30	1785	1050
MXS108DS	2½"	567	34	2040	1200

Flow Rates (Multi-Banked)

Model	Pipe Size	Inlet Flow Rate			
		L/s	m³/min	m³/hr	cfm
2 x MXS105DS	2½"	708	43	2550	1500
2 x MXS106DS	2½"	850	51	3060	1800
2 x MXS107DS	2½"	992	60	3570	2100
2 x MXS108DS	2½"	1133	68	4080	2400
3 x MXS106DS	2½"	1275	77	4590	2700
3 x MXS107DS	2½"	1488	89	5355	3150
3 x MXS108DS	2½"	1700	102	6120	3600
For Higher Flow Capacities - Contact Parker					

Stated flows are for operation at 7 bar (g) (102 psi g) with reference to 20°C, 1 bar (a), 0% relative water vapour pressure.

For flows at other pressures, apply the correction factors shown below.

Product Selection & Correction Factors

For correct operation, compressed air dryers must be sized using for the maximum (summer) inlet temperature, maximum (summer) ambient temperature, minimum inlet pressure, required outlet dewpoint and maximum flow rate of the installation.

To select a dryer, first calculate the MDC (Minimum Drying Capacity) using the formula below then select a dryer from the flow rate table above with a flow rate equal to or above the MDC.

$$\text{Minimum Drying Capacity} = \text{System Flow} \times \text{CFMIT} \times \text{CFMAT} \times \text{CFMIP} \times \text{CFOD}$$

CFMIT - Correction Factor Maximum Inlet Temperature

Maximum Inlet Temperature	°C	25	30	35	40	45	50
	°F	77	86	95	104	113	122
Correction Factor		1.00	1.00	1.00	1.04	1.14	1.37

CFMAT - Correction Factor Maximum Ambient Temperature


Maximum Ambient Temperature	°C	25	30	35	40	45	50
	°F	77	86	95	104	113	122
Correction Factor		1.00	1.00	1.00	1.00	1.00	1.00

CFMIP - Correction Factor Minimum Inlet Pressure

Minimum Inlet Pressure	bar g	4	5	6	7	8	9	10	11	12	13
	psi g	58	73	87	100	116	131	145	160	174	189
Correction Factor		1.60	1.33	1.14	1.00	0.89	0.80	0.73	0.67	0.62	0.57

CFOD - Correction Factor Outlet Dewpoint

Outlet Dewpoint	°C	-20	-40	-70
	°F	-4	-40	-100
Correction Factor		0.91	1.00	1.43

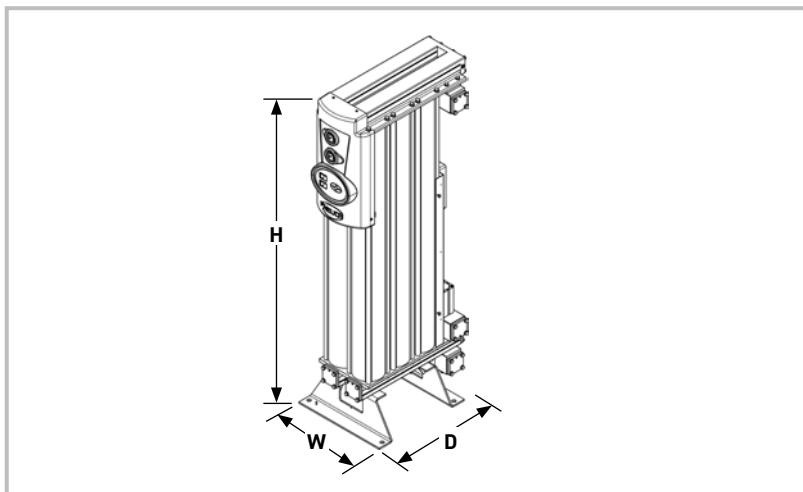

Weights & Dimensions

Model	Dimensions						Weight	
	Height (H)		Width (W)		Depth (D)			
	mm	ins	mm	ins	mm	ins	kg	lbs
MXS102CDS	1647	64.8	687	27.0	550	21.7	235	518
MXS103CDS	1647	64.8	856	33.7	550	21.7	316	696
MXS103DS	1892	74.5	856	33.7	550	21.7	355	782
MXS104DS	1892	74.5	1025	40.3	550	21.7	450	992
MXS105DS	1892	74.5	1194	47.0	550	21.7	543	1197
MXS106DS	1892	74.5	1363	53.6	550	21.7	637	1404
MXS107DS	1892	74.5	1532	60.3	550	21.7	731	1611
MXS108DS	1892	74.5	1701	67.0	550	21.7	825	1818

Recommended Filtration

Model	Pipe Size BSPP or NPT	Dryer Inlet		Dryer Outlet		
		General Purpose Pre-filter	High Efficiency Filter	Oil Vapour Reduction Filter	General Purpose Dry Particulate Filter	High Efficiency Dry Particulate Filter
MXS102CDS	2"	AOPX040H	AAPX040H	Technically 'Oil Free Air' to ISO8573-1:2010 Class 0 (<0.003 mg/m³) for total oil can be easily achieved by selecting an optional OIL-X OVR grade filter.	AOPX040H	-
MXS103CDS	2"	AOPX040H	AAPX040H		AOPX040H	-
MXS103DS	2"	AOPX040H	AAPX040H		AOPX040H	-
MXS104DS	2½"	AOPX045I	AAPX045I		AOPX045I	-
MXS105DS	2½"	AOPX050I	AAPX050I		AOPX050I	-
MXS106DS	2½"	AOPX050I	AAPX050I		AOPX050I	-
MXS107DS	2½"	AOPX055I	AAPX055I		AOPX055I	-
MXS108DS	2½"	AOPX055I	AAPX055I		AOPX055I	-

Parker Catalogue Numbers

Model	Catalogue Number -20°C PDP / -40°C PDP	Catalogue Number -70°C PDP
MXS102CDS	MXS102CDS-40BP	MXS102CDS-70BP
MXS103CDS	MXS103CDS-40BP	MXS103CDS-70BP
MXS103DS	MXS103DS-40BP	MXS103DS-70BP
MXS104DS	MXS104DS-40BP	MXS104DS-70BP
MXS105DS	MXS105DS-40BP	MXS105DS-70BP
MXS106DS	MXS106DS-40BP	MXS106DS-70BP
MXS107DS	MXS107DS-40BP	MXS107DS-70BP
MXS108DS	MXS108DS-40BP	MXS108DS-70BP

Dryer catalogue number does not include filtration - Please order filters separately

Important Notes Regarding the Ordering of MX dryers

Please note that when ordering MXS heatless dryers, the following items must also be ordered separately.

- Dryer Model
- Inlet / Outlet Flange kit (BSPP or NPT)
- Pre / Post Filtration (Grades A0 / AA/ A0)
- FCD (Flow Control Device) - only required for multi-bank installations
- QRV - Part Number 608203833 for operation 9 bar g

MX ATEX Pneumatic Heatless Adsorption Dryers

Dryer Performance

Dryer Models	Dewpoint (Standard)		ISO8573-1:2010 Classification (Standard)	Dewpoint (Option 1)		ISO8573-1:2010 Classification (Option 1)	Dewpoint (Option 2)		ISO8573-1:2010 Classification (Option 2)
	°C	°F		°C	°F		°C	°F	
MXP DS	-40	-40	Class 2.2.2	-70	-100	Class 2.1.2	-20	-4	Class 2.3.2

ISO8573-1 Classifications when used with OIL-X pre / post filtration

Technical Data

Dryer Models	Minimum Operating Pressure		Maximum Operating Pressure		Minimum Operating Temperature		Maximum Operating Temperature		Maximum Ambient Temperature		Electrical Supply (Standard)	Electrical Supply (Optional)	Thread Type	Noise Level
	bar g	psi g	bar g	psi g	°C	°F	°C	°F	°C	°F				
MXP102CDS - MXP108DS	4	58	13	190	5	41	50	122	55	131	Not Applicable - Fully Pneumatic Operation	BSPP	<75	dB(A)

Flow Rates

Model	Pipe Size	Inlet Flow Rate			
		L/s	m³/min	m³/hr	cfm
MXP102C	2"	113	6.81	408	240
MXP103C	2"	170	10.22	612	360
MXP103	2"	213	12.75	765	450
MXP104	2½"	283	17	1020	600
MXP105	2½"	354	21	1275	750
MXP106	2½"	425	26	1530	900
MXP107	2½"	496	30	1785	1050
MXP108	2½"	567	34	2040	1200

Stated flows are for operation at 7 bar (g) (102 psi g) with reference to 20°C, 1 bar (a), 0% relative water vapour pressure. For flows at other pressures, apply the correction factors shown below.

Product Selection & Correction Factors

For correct operation, compressed air dryers must be sized using for the maximum (summer) inlet temperature, maximum (summer) ambient temperature, minimum inlet pressure, required outlet dewpoint and maximum flow rate of the installation.

To select a dryer, first calculate the MDC (Minimum Drying Capacity) using the formula below then select a dryer from the flow rate table above with a flow rate equal to or above the MDC.

$$\text{Minimum Drying Capacity} = \text{System Flow} \times \text{CFMIT} \times \text{CFMAT} \times \text{CFMIP} \times \text{CFOD}$$

CFMIT - Correction Factor Maximum Inlet Temperature

Maximum Inlet Temperature	°C	25	30	35	40	45	50
	°F	77	86	95	104	113	122
Correction Factor		1.00	1.00	1.00	1.04	1.14	1.37

CFMAT - Correction Factor Maximum Ambient Temperature


Maximum Ambient Temperature	°C	25	30	35	40	45	50
	°F	77	86	95	104	113	122
Correction Factor		1.00	1.00	1.00	1.00	1.00	1.00

CFMIP - Correction Factor Minimum Inlet Pressure

Minimum Inlet Pressure	bar g	4	5	6	7	8	9	10	11	12	13
	psi g	58	73	87	100	116	131	145	160	174	189
Correction Factor		1.60	1.33	1.14	1.00	0.89	0.80	0.73	0.67	0.62	0.57

CFOD - Correction Factor Outlet Dewpoint

Outlet Dewpoint	°C	-20	-40	-70
	°F	-4	-40	-100
Correction Factor		0.91	1.00	1.43

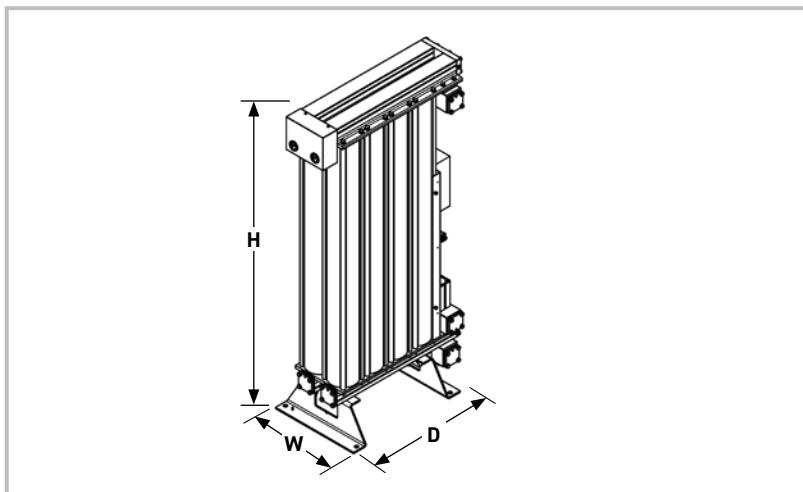

Weights & Dimensions

Model	Dimensions						Weight	
	Height (H)		Width (W)		Depth (D)			
	mm	ins	mm	ins	mm	ins	kg	lbs
MXP102C	1647	64.8	687	27.0	550	21.7	235	518
MXP103C	1647	64.8	856	33.7	550	21.7	316	696
MXP103	1892	74.5	856	33.7	550	21.7	355	782
MXP104	1892	74.5	1025	40.3	550	21.7	450	992
MXP105	1892	74.5	1194	47.0	550	21.7	543	1197
MXP106	1892	74.5	1363	53.6	550	21.7	637	1404
MXP107	1892	74.5	1532	60.3	550	21.7	731	1611
MXP108	1892	74.5	1701	67.0	550	21.7	825	1818

Recommended Filtration

Model	Pipe Size BSPP	Dryer Inlet		Dryer Outlet		
		General Purpose Pre-filter	High Efficiency Filter	Oil Vapour Reduction Filter	General Purpose Dry Particulate Filter	High Efficiency Dry Particulate Filter
MXP102C	2"	AOPX040H	AAPX040H	-	AOPX040H	-
MXP103C	2"	AOPX040H	AAPX040H	-	AOPX040H	-
MXP103	2"	AOPX040H	AAPX040H	-	AOPX040H	-
MXP104	2½"	AOPX045I	AAPX045I	-	AOPX045I	-
MXP105	2½"	AOPX050I	AAPX050I	-	AOPX050I	-
MXP106	2½"	AOPX050I	AAPX050I	-	AOPX050I	-
MXP107	2½"	AOPX055I	AAPX055I	-	AOPX055I	-
MXP108	2½"	AOPX055I	AAPX055I	-	AOPX055I	-

Parker Catalogue Numbers

Model	Catalogue Number -20°C PDP / -40°C PDP	Catalogue Number -70°C PDP	Dryer catalogue number does not include filtration - Please order filters separately
MXP102C	MXP102C-40-ATEX	MXP102C-70-ATEX	
MXP103C	MXP103C-40-ATEX	MXP103C-70-ATEX	
MXP103	MXP103-40-ATEX	MXP103-70-ATEX	
MXP104	MXP104-40-ATEX	MXP104-70-ATEX	
MXP105	MXP105-40-ATEX	MXP105-70-ATEX	
MXP106	MXP106-40-ATEX	MXP106-70-ATEX	
MXP107	MXP107-40-ATEX	MXP107-70-ATEX	
MXP108	MXP108-40-ATEX	MXP108-70-ATEX	

Important Notes Regarding the Ordering of MX dryers
Please note that when ordering MXP heatless dryers, the following items must also be ordered separately.

- Dryer Model
- Inlet / Outlet Flange kit (BSPP or NPT)
- Pre / Post Filtration (Grades A0 / AA/ A0)
- FCD (Flow Control Device) - only required for multi-bank installations
- QRV - Part Number 608203833 for operation 9 bar g

Multi-banking

A unique advantage of modular aluminium dryers is the ability to access the full cross sectional area of the drying columns and fill the desiccant material with a snowstorm filler, a device which provides maximum packing density of the desiccant material. Snowstorm filling of the desiccant material provides a low and equal resistance to the air flow which allows multiple drying chambers to be used without preferential flow and provides a consistent outlet dewpoint with less desiccant and in a smaller, more compact and lightweight dryer.

Another advantage of snowstorm filling is that it also allows multiple dryer banks to be used without preferential flow because each individual dryer will have an equal pressure drop. This is a feature unique to modular dryers and is known as multi-banking.




Flow Control Device (FCD)

Compressed air will flow down a uniform pipe at a constant velocity. For a fixed compressed air flow rate, reducing the diameter of the pipe will increase the speed of the compressed air. Changing pipe diameter can therefore be used as a means to control compressed air flow rate, which is the purpose of an FCD (Flow Control Device).

If the pipe diameter is reduced far enough, the air velocity will increase until it reaches its maximum, the speed of sound (hence the FCD's common name of 'Sonic Nozzle').

Although not needed for every application, FCDs can be used to prevent significant overflow of a desiccant dryer and help maintain a constant outlet dewpoint. They are also commonly used on multi-bank installations (two or more modular aluminium dryers connected in parallel) to prevent preferential flow if piping is unbalanced.

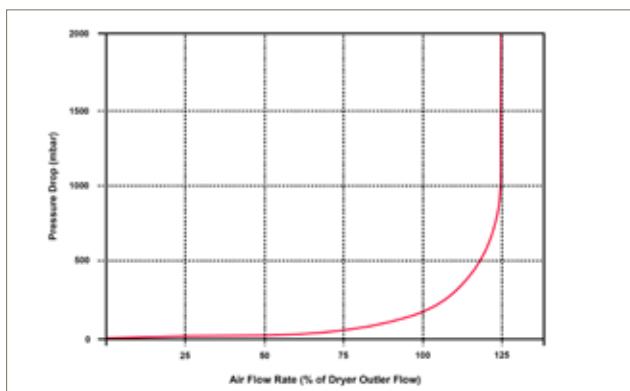

FCDs are installed in the outlet of a dryer and are sized so the maximum flow rate of the device is above the outlet flow rate of the dryer.

Below 100% of the dryers outlet capacity, they have minimal impact on differential pressure (dP) or flow.

Above 100% of the dryer's rated outlet capacity, an increasingly higher differential pressure will be generated by the FCD.


This will allow a small dryer overflow to occur satisfying temporary system demand, however if demand were to increase, the line pressure downstream of the FCD will start to fall indicating to the user the dryer is being overflowed.

All precautions should be taken from the initial sizing of the dryer to the installation and operation to ensure the dryer is not overflowed.

It is recommended that FCDs are fitted to the outlet of each modular dryer when installed in a multi-bank configuration.

MXS & MXLE dryers utilise the same FCDs but have different outlet flow rates.

FCD max flow rate is therefore equivalent to approximately 105% of the outlet flow rate for an MXLE dryer and 125% of the outlet flow rate for an MX dryer.

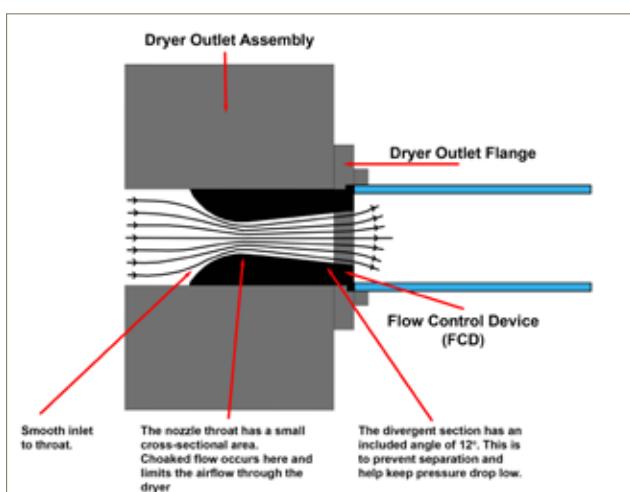

Benefits of Fitting a Flow Control Device:

- Prevents preferential or significant overflow of the dryer
- Helps to maintain a constant outlet pressure dewpoint
- Indicates by high pressure drop when system demand exceeds rated capacity

Flanged Connection Kits for MX Dryers

MX dryers do not include an inlet / outlet connection. When ordering an MX dryer the flanged connection kit must be ordered in addition to the dryer and must match the connection sizes of the inlet & outlet filtration.

When more than one dryer is installed (multi-bank installation), a Flow Control Device (FCD) is also required. The FCD will fit inside the outlet flange. Please order the appropriate inlet / outlet connection kit from the list below and FCD from the tables on the following pages.



608620077 thread connection kit (outlet flange on left)

The MX102c - MX103 dryers have 2" connections


608620076 FCD threaded connection 2" BSPP

608620078 FCD threaded connection 2" NPT

The MX104 - MX108 dryers have 2.5" connections

608620077 FCD threaded connection 2½" BSPP

608620079 FCD threaded connection 2½" NPT

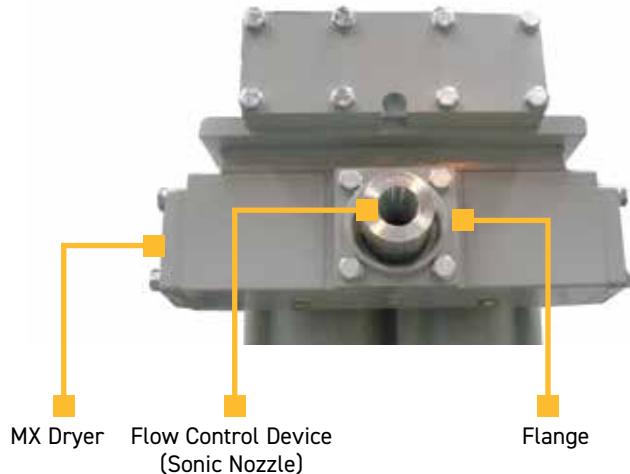

Flow Control Device (FCD) Product Selection For MXS Heatless and MXLE Heatless Low Energy Dryers

To size FCDs correctly, the following information is required:

- Dryer Model
- Dewpoint dryer has been sized to deliver
- Minimum Inlet pressure
- Maximum Inlet Temperature

Sizing Example - MXS

The customer orders 2 x MXS108 and requires BSPP connections. The site parameters are an inlet temperature of 35°C, inlet pressure of 7 bar g, and a pressure dewpoint of -40°C. The FCD is 608620053, and the correct flange kit is 608620077.

Sizing Example - MXLE

The customer orders 3 x MXLE108 dryers. The site parameters are a maximum inlet temperature of 40°C, minimum inlet pressure of 9 bar g, and a pressure dewpoint of -70°C. The FCD required for each dryer is 608620044.



Flow Control Device (FCD) Product Selection

For MXS Heatless Dryers & MXLE Heatless Low Energy Dryers

35°C Inlet Temperature -20°C PDP								
Pressure	MX / MXLE 102c	MX / MXLE 103c	MX / MXLE 103	MX / MXLE 104	MX / MXLE 105	MX / MXLE 106	MX / MXLE 107	MX / MXLE 108
4 bar	608620009	608620014	608620017	608620021	608620043	608620046	608620049	608620052
5 bar	608620010	608620015	608620018	608620022	608620044	608620048	608620051	608620054
6 bar	608620011	608620015	608620018	608620023	608620045	608620048	608620052	608620055
7 bar	608620011	608620016	608620019	608620023	608620045	608620049	608620052	608620056
8 bar	608620011	608620016	608620019	608620024	608620046	608620050	608620053	608620056
9 bar	608620011	608620016	608620020	608620024	608620046	608620050	608620053	608620057
10 bar	608620012	608620017	608620020	608620024	608620047	608620050	608620054	608620057
11 bar	608620012	608620017	608620020	608620025	608620047	608620051	608620054	608620057
12 bar	608620012	608620017	608620020	608620025	608620047	608620051	608620054	Contact Parker
13 bar	608620012	608620017	608620020	608620025	608620047	608620051	608620054	Contact Parker

35°C Inlet Temperature -40°C PDP								
Pressure	MX / MXLE 102c	MX / MXLE 103c	MX / MXLE 103	MX / MXLE 104	MX / MXLE 105	MX / MXLE 106	MX / MXLE 107	MX / MXLE 108
4 bar	608620008	608620012	608620015	608620019	608620040	608620044	608620047	608620049
5 bar	608620009	608620013	608620016	608620020	608620042	608620045	608620048	608620051
6 bar	608620009	608620014	608620017	608620021	608620043	608620046	608620049	608620052
7 bar	608620010	608620014	608620017	608620022	608620043	608620047	608620050	608620053
8 bar	608620010	608620015	608620018	608620022	608620044	608620047	608620050	608620053
9 bar	608620010	608620015	608620018	608620022	608620044	608620048	608620051	608620054
10 bar	608620010	608620015	608620018	608620023	608620044	608620048	608620051	608620054
11 bar	608620011	608620015	608620018	608620023	608620045	608620048	608620052	608620055
12 bar	608620011	608620015	608620019	608620023	608620045	608620049	608620052	608620055
13 bar	608620011	608620016	608620019	608620023	608620045	608620049	608620052	608620055

35°C Inlet Temperature -70°C PDP								
Pressure	MX / MXLE 102c	MX / MXLE 103c	MX / MXLE 103	MX / MXLE 104	MX / MXLE 105	MX / MXLE 106	MX / MXLE 107	MX / MXLE 108
4 bar	608620008	608620012	608620015	608620019	608620040	608620044	608620047	608620049
5 bar	608620009	608620013	608620016	608620020	608620042	608620045	608620048	608620051
6 bar	608620009	608620014	608620017	608620021	608620043	608620046	608620049	608620052
7 bar	608620010	608620014	608620017	608620022	608620043	608620047	608620050	608620053
8 bar	608620010	608620015	608620018	608620022	608620044	608620047	608620050	608620053
9 bar	608620010	608620015	608620018	608620022	608620044	608620048	608620051	608620054
10 bar	608620010	608620015	608620018	608620023	608620044	608620048	608620051	608620054
11 bar	608620011	608620015	608620018	608620023	608620045	608620048	608620052	608620055
12 bar	608620011	608620015	608620019	608620023	608620045	608620049	608620052	608620055
13 bar	608620011	608620016	608620019	608620023	608620045	608620049	608620052	608620055

40°C Inlet Temperature -20°C PDP								
Pressure	MX / MXLE 102c	MX / MXLE 103c	MX / MXLE 103	MX / MXLE 104	MX / MXLE 105	MX / MXLE 106	MX / MXLE 107	MX / MXLE 108
4 bar	608620009	608620014	608620016	608620021	608620042	608620046	608620049	608620051
5 bar	608620010	608620014	608620017	608620022	608620043	608620047	608620050	608620053
6 bar	608620010	608620015	608620018	608620022	608620044	608620048	608620051	608620054
7 bar	608620011	608620015	608620018	608620023	608620045	608620048	608620052	608620055
8 bar	608620011	608620016	608620019	608620023	608620045	608620049	608620052	608620055
9 bar	608620011	608620016	608620019	608620024	608620046	608620049	608620053	608620056
10 bar	608620011	608620016	608620019	608620024	608620046	608620050	608620053	608620056
11 bar	608620011	608620016	608620020	608620024	608620046	608620050	608620053	608620057
12 bar	608620012	608620017	608620020	608620024	608620047	608620050	608620054	608620057
13 bar	608620011	608620017	608620020	608620025	608620047	608620050	608620054	608620057

40°C Inlet Temperature -40°C PDP								
Pressure	MX / MXLE 102c	MX / MXLE 103c	MX / MXLE 103	MX / MXLE 104	MX / MXLE 105	MX / MXLE 106	MX / MXLE 107	MX / MXLE 108
4 bar	608620008	608620012	608620015	608620018	608620040	608620043	608620046	608620048
5 bar	608620009	608620013	608620016	608620020	608620042	608620044	608620047	608620050
6 bar	608620009	608620013	608620016	608620020	608620043	608620045	608620048	608620051
7 bar	608620009	608620014	608620017	608620021	608620043	608620046	608620059	608620052
8 bar	608620010	608620014	608620017	608620021	608620044	608620047	608620050	608620053
9 bar	608620010	608620015	608620017	608620022	608620044	608620047	608620050	608620053
10 bar	608620010	608620015	608620018	608620022	608620044	608620047	608620051	608620054
11 bar	608620010	608620015	608620018	608620022	608620045	608620048	608620051	608620054
12 bar	608620010	608620015	608620018	608620023	608620045	608620048	608620051	608620054
13 bar	608620010	608620015	608620018	608620023	608620045	608620048	608620051	608620054

40°C Inlet Temperature -70°C PDP								
Pressure	MX / MXLE 102c	MX / MXLE 103c	MX / MXLE 103	MX / MXLE 104	MX / MXLE 105	MX / MXLE 106	MX / MXLE 107	MX / MXLE 108
4 bar	608620003	608620006	608620008	608620011	608620032	608620034	608620036	608620038
5 bar	608620004	608620007	608620009	608620013	608620033	608620036	608620038	608620040
6 bar	608620005	608620008	608620010	608620014	608620034	608620037	608620039	608620042
7 bar	608620005	608620009	608620011	608620014	608620035	608620038	608620040	608620043
8 bar	608620006	608620009	608620012	608620015	608620036	608620039	608620041	608620043
9 bar	608620006	608620010	608620012	608620015	608620036	608620039	608620042	608620044
10 bar	608620006	608620010	608620012	608620016	608620037	608620040	608620042	608620045
11 bar	608620006	608620010	608620012	608620016	608620037	608620040	608620043	608620045
12 bar	608620006	608620010	608620013	608620016	608620037	608620040	608620043	608620045
13 bar	608620007	608620010	608620013	608620016	608620038	608620041	608620043	608620046

Flow Control Device (FCD) Product Selection

For MXS Heatless Dryers & MXLE Heatless Low Energy Dryers

45°C Inlet Temperature -20°C PDP								
Pressure	MX / MXLE 102c	MX / MXLE 103c	MX / MXLE 103	MX / MXLE 104	MX / MXLE 105	MX / MXLE 106	MX / MXLE 107	MX / MXLE 108
4 bar	608620008	608620012	608620015	608620019	608620040	608620043	608620046	608620049
5 bar	608620009	608620013	608620016	608620020	608620041	608620044	608620047	608620050
6 bar	608620009	608620014	608620016	608620021	608620042	608620045	608620049	608620051
7 bar	608620009	608620014	608620017	608620021	608620043	608620046	608620049	608620052
8 bar	608620010	608620014	608620017	608620022	608620043	608620047	608620050	608620053
9 bar	608620010	608620015	608620018	608620022	608620044	608620047	608620050	608620053
10 bar	608620010	608620015	608620018	608620022	608620044	608620048	608620051	608620054
11 bar	608620010	608620015	608620018	608620022	608620044	608620048	608620051	608620054
12 bar	608620010	608620015	608620018	608620023	608620045	608620048	608620051	608620054
13 bar	608620011	608620015	608620018	608620023	608620045	608620048	608620051	608620054

45°C Inlet Temperature -40°C PDP								
Pressure	MX / MXLE 102c	MX / MXLE 103c	MX / MXLE 103	MX / MXLE 104	MX / MXLE 105	MX / MXLE 106	MX / MXLE 107	MX / MXLE 108
4 bar	608620007	608620010	608620013	608620016	608620038	608620041	608620043	608620046
5 bar	608620007	608620011	608620014	608620018	608620039	608620042	608620045	608620047
6 bar	608620008	608620012	608620015	608620019	608620040	608620043	608620046	608620049
7 bar	608620008	608620013	608620015	608620019	608620041	608620044	608620047	608620050
8 bar	608620009	608620013	608620016	608620020	608620041	608620045	608620047	608620050
9 bar	608620009	608620013	608620016	608620020	608620042	608620045	608620048	608620051
10 bar	608620009	608620013	608620016	608620020	608620042	608620045	608620048	608620051
11 bar	608620009	608620014	608620016	608620021	608620042	608620046	608620049	608620052
12 bar	608620009	608620014	608620017	608620021	608620042	608620046	608620049	608620052
13 bar	608620009	608620014	608620017	608620021	608620043	608620046	608620049	608620052

45°C Inlet Temperature -70°C PDP								
Pressure	MX / MXLE 102c	MX / MXLE 103c	MX / MXLE 103	MX / MXLE 104	MX / MXLE 105	MX / MXLE 106	MX / MXLE 107	MX / MXLE 108
4 bar	608620002	608620005	608620007	608620009	608620029	608620032	608620033	608620035
5 bar	608620003	608620006	608620008	608620011	608620031	608620034	608620036	608620038
6 bar	608620004	608620007	608620009	608620012	608620033	608620035	608620037	608620039
7 bar	608620004	608620008	608620010	608620013	608620034	608620036	608620038	608620040
8 bar	608620005	608620008	608620010	608620013	608620034	608620037	608620039	608620041
9 bar	608620005	608620008	608620011	608620014	608620035	608620037	608620040	608620042
10 bar	608620005	608620009	608620011	608620014	608620035	608620038	608620040	608620042
11 bar	608620005	608620009	608620011	608620015	608620036	608620038	608620041	608620043
12 bar	608620006	608620009	608620011	608620015	608620036	608620039	608620041	608620043
13 bar	608620006	608620009	608620012	608620015	608620036	608620039	608620041	608620044

50°C Inlet Temperature -20°C PDP								
Pressure	MX / MXLE 102c	MX / MXLE 103c	MX / MXLE 103	MX / MXLE 104	MX / MXLE 105	MX / MXLE 106	MX / MXLE 107	MX / MXLE 108
4 bar	608620005	608620009	608620011	608620015	608620036	608620038	608620041	608620043
5 bar	608620006	608620010	608620012	608620026	608620037	608620040	608620043	608620045
6 bar	608620007	608620011	608620013	608620017	608620038	608620041	608620044	608620046
7 bar	608620007	608620011	608620014	608620018	608620039	608620042	608620045	608620047
8 bar	608620008	608620012	608620014	608620018	608620040	608620043	608620045	608620048
9 bar	608620008	608620012	608620015	608620019	608620040	608620043	608620046	608620049
10 bar	608620008	608620012	608620015	608620019	608620040	608620043	608620046	608620049
11 bar	608620008	608620012	608620015	608620019	608620041	608620044	608620047	608620049
12 bar	608620008	608620013	608620015	608620019	608620041	608620044	608620047	608620050
13 bar	608620008	608620013	608620016	608620020	608620041	608620044	608620047	608620050

50°C Inlet Temperature -40°C PDP								
Pressure	MX / MXLE 102c	MX / MXLE 103c	MX / MXLE 103	MX / MXLE 104	MX / MXLE 105	MX / MXLE 106	MX / MXLE 107	MX / MXLE 108
4 bar	608620004	608620007	608620010	608620013	608620033	608620036	608620038	608620040
5 bar	608620005	608620009	608620011	608620014	608620035	608620038	608620040	608620042
6 bar	608620006	608620009	608620012	608620015	608620036	608620039	608620041	608620044
7 bar	608620006	608620010	608620012	608620016	608620037	608620040	608620042	608620045
8 bar	608620007	608620010	608620013	608620016	608620038	608620040	608620043	608620046
9 bar	608620007	608620011	608620013	608620017	608620038	608620041	608620044	608620046
10 bar	608620007	608620011	608620013	608620017	608620038	608620041	608620044	608620047
11 bar	608620007	608620011	608620014	608620017	608620039	608620042	608620044	608620047
12 bar	608620007	608620011	608620014	608620018	608620039	608620042	608620045	608620047
13 bar	608620007	608620012	608620014	608620018	608620039	608620042	608620045	608620048

50°C Inlet Temperature -70°C PDP								
Pressure	MX 102c	MX 103c	MX 103	MX 104	MX 105	MX 106	MX 107	MX 108
4 bar	608620001	608620002	608620003	608620005	608620028	608620027	608620028	608620030
5 bar	608620001	608620003	608620005	608620007	608620028	608620029	608620031	608620033
6 bar	608620002	608620004	608620006	608620009	608620029	608620031	608620033	608620035
7 bar	608620002	608620005	608620007	608620010	608620030	608620032	608620034	608620036
8 bar	608620003	608620006	608620008	608620010	608620031	608620033	608620035	608620037
9 bar	608620003	608620006	608620008	608620011	608620031	608620034	608620036	608620038
10 bar	608620003	608620006	608620008	608620011	608620032	608620034	608620036	608620038
11 bar	608620004	608620007	608620009	608620012	608620032	608620035	608620037	608620039
12 bar	608620004	608620007	608620009	608620012	608620033	608620035	608620037	608620039
13 bar	608620004	608620007	608620009	608620012	608620033	608620035	608620038	608620040

MXLE Large Flow Heatless Low Energy Adsorption Dryers

Dryer Performance

Dryer Models	Dewpoint (Standard)		ISO8573-1:2010 Classification (Standard)		Dewpoint (Option 1)		ISO8573-1:2010 Classification (Option 1)		Dewpoint (Option 2)		ISO8573-1:2010 Classification (Option 2)	
	°C	°F			°C	°F			°C	°F		
MXLE	-40	-40	Class 2.2.2		-70	-100	Class 2.1.2		-20	-4	Class 2.3.2	

ISO8573-1 Classifications when used with OIL-X pre / post filtration

Technical Data

Dryer Models	Minimum Operating Pressure		Maximum Operating Pressure		Minimum Operating Temperature		Maximum Operating Temperature		Maximum Ambient Temperature		Electrical Supply (Standard)	Electrical Supply (Optional)	Thread Type	Noise Level
	bar g	psi g	bar g	psi g	°C	°F	°C	°F	°C	°F				
MXLE 102C - MXLE 108	5	73	13	190	5	41	50	122	55	131	400V +/-10% 3PH 50Hz	460V +/-10% 3PH 60Hz	BSPP	<75

Flow Rates

Model	Pipe Size	Inlet Flow Rate			
		L/s	m³/min	m³/hr	cfm
MXLE 102C	2"	113	6.81	408	240
MXLE 103C	2"	170	10.22	612	360
MXLE 103	2"	213	12.75	765	450
MXLE 104	2½"	283	17	1020	600
MXLE 105	2½"	354	21	1275	750
MXLE 106	2½"	425	26	1530	900
MXLE 107	2½"	496	30	1785	1050
MXLE 108	2½"	567	34	2040	1200

For Higher Flow Capacities - Contact Parker

Vacuum Pump Part Number & kW

Vacuum Pump 50Hz	kW 50Hz	Vacuum Pump 60Hz	kW 60Hz
MXLEP2C-E	3	MXLEP2C-E-60	4.8
MXLEP3C-E	3	MXLEP3C-E-60	4.8
MXLEP3-OL	4	MXLEP3-OL-60	6.5
MXLEP4-OL	5.5	MXLEP4-OL-60	9
MXLEP5-OL	5.5	MXLEP5-OL-60	9
MXLEP6-OL	8	MXLEP6-OL-60	13
MXLEP7-OL	9.5	MXLEP7-OL-60	15.5
MXLEP8-OL	9.5	MXLEP8-OL-60	15.5

Dryer & vacuum pump to be ordered separately.

Stated flows are for operation at 7 bar (g) (102 psi g) with reference to 20°C, 1 bar (a), 0% relative water vapour pressure.
For flows at other pressures, apply the correction factors shown below.

Product Selection & Correction Factors

For correct operation, compressed air dryers must be sized using for the maximum (summer) inlet temperature, maximum (summer) ambient temperature, minimum inlet pressure, required outlet dewpoint and maximum flow rate of the installation.

To select a dryer, first calculate the MDC (Minimum Drying Capacity) using the formula below then select a dryer from the flow rate table above with a flow rate equal to or above the MDC.

$$\text{Minimum Drying Capacity} = \text{System Flow} \times \text{CFMIT} \times \text{CFMAT} \times \text{CFMIP} \times \text{CFOD}$$

CFMIT - Correction Factor Maximum Inlet Temperature

Maximum Inlet Temperature	°C	25	30	35	40	45	50
	°F	77	86	95	104	113	122
Correction Factor		1.00	1.00	1.00	1.04	1.14	1.37

CFMAT - Correction Factor Maximum Ambient Temperature


Maximum Ambient Temperature	°C	25	30	35	40	45	50
	°F	77	86	95	104	113	122
Correction Factor		1.00	1.00	1.00	1.00	1.00	1.00

CFMIP - Correction Factor Minimum Inlet Pressure

Minimum Inlet Pressure	bar g	4	5	6	7	8	9	10	11	12	13
	psi g	58	73	87	100	116	131	145	160	174	189
Correction Factor		1.60	1.33	1.14	1.00	0.89	0.80	0.73	0.67	0.62	0.57

CFOD - Correction Factor Outlet Dewpoint

Outlet Dewpoint	°C	-20	-40	-70
	°F	-4	-40	-100
Correction Factor		0.91	1.00	1.43

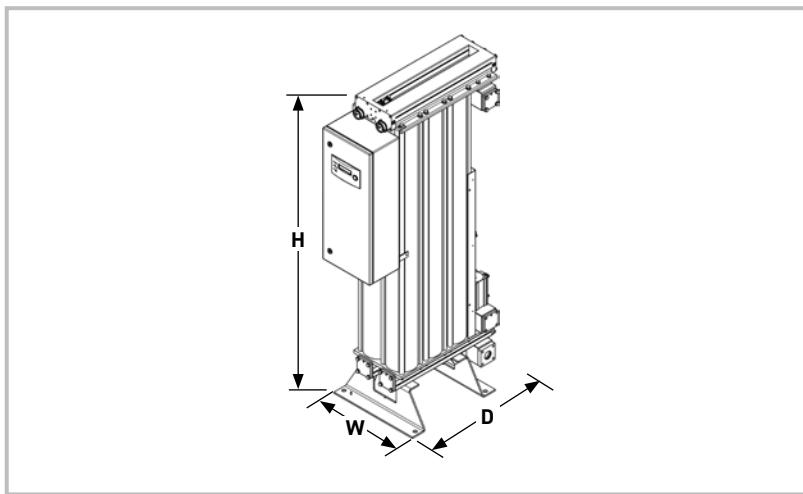

Weights & Dimensions

Model	Dimensions (Dryer Only)						Weight (Dryer Only)	
	Height (H)		Width (W)		Depth (D)			
	mm	ins	mm	ins	mm	ins		
MXLE 102C	1647	64.8	793	31.5	550	21.7	265	
MXLE 103C	1647	64.8	962	37.9	550	21.7	346	
MXLE 103	1892	74.5	962	37.9	550	21.7	385	
MXLE 104	1892	74.5	1131	44.6	550	21.7	480	
MXLE 105	1892	74.5	1300	51.2	550	21.7	573	
MXLE 106	1892	74.5	1469	57.9	550	21.7	667	
MXLE 107	1892	74.5	1641	64.6	550	21.7	761	
MXLE 108	1892	74.5	1807	71.2	550	21.7	855	
							1881	

Included Filtration

Model	Pipe Size BSPP	Dryer Inlet		Dryer Outlet		
		General Purpose Pre-filter	High Efficiency Filter	Oil Vapour Reduction Filter	General Purpose Dry Particulate Filter	High Efficiency Dry Particulate Filter
MXLE 102C	2"	AOPX040H	AAPX040H	-	AOPX040H	-
MXLE 103C	2"	AOPX040H	AAPX040H	-	AOPX040H	-
MXLE 103	2"	AOPX040H	AAPX040H	-	AOPX040H	-
MXLE 104	2½"	AOPX045I	AAPX045I	-	AOPX045I	-
MXLE 105	2½"	AOPX050I	AAPX050I	-	AOPX050I	-
MXLE 106	2½"	AOPX050I	AAPX050I	-	AOPX050I	-
MXLE 107	2½"	AOPX055I	AAPX055I	-	AOPX055I	-
MXLE 108	2½"	AOPX055I	AAPX055I	-	AOPX055I	-

Parker Catalogue Numbers

Model	Catalogue Number -20°C PDP / -40°C PDP	Catalogue Number -70°C PDP	50Hz Vacuum Pump Part Numbers	60Hz Vacuum Pump Part Numbers	Dryer Upgrade Kit Part Numbers
MXLE102C	MXLE102C	MXLE102C-70	MXLEP2C-OL	MXLEP2C-OL-60	MXLEK2C
MXLE103C	MXLE103C	MXLE103C-70	MXLEP3C-OL	MXLEP3C-OL-60	MXLEK3C
MXLE103	MXLE103	MXLE103-70	MXLEP3-OL	MXLEP3-OL-60	MXLEK3
MXLE104	MXLE104	MXLE104-70	MXLEP4-OL	MXLEP4-OL-60	MXLEK4
MXLE105	MXLE105	MXLE105-70	MXLEP5-OL	MXLEP5-OL-60	MXLEK5
MXLE106	MXLE106	MXLE106-70	MXLEP6-OL	MXLEP6-OL-60	MXLEK6
MXLE107	MXLE107	MXLE107-70	MXLEP7-OL	MXLEP7-OL-60	MXLEK7
MXLE108	MXLE108	MXLE108-70	MXLEP8-OL	MXLEP8-OL-60	MXLEK8

K-MT Large Flow Heatless Adsorption Dryers

Dryer Performance

Dryer Models	Dewpoint (Standard)		ISO8573-1:2010 Classification (Standard)	Dewpoint (Option 1)		ISO8573-1:2010 Classification (Option 1)	Dewpoint (Option 2)		ISO8573-1:2010 Classification (Option 2)
	°C	°F		°C	°F		°C	°F	
K-MT 10 - 95	-40	-40	Class 2.2.2	-70	-100	Class 2.1.2	-25	-13	Class 2.3.2

ISO8573-1 Classifications when used with Parker OIL-X pre / post filtration

Technical Data

Dryer Models	Minimum Operating Pressure		Maximum Operating Pressure		Minimum Operating Temperature		Maximum Operating Temperature		Maximum Ambient Temperature		Electrical Supply (Standard)	Electrical Supply (Optional)	Thread Type	Noise Level
	bar g	psi g	bar g	psi g	°C	°F	°C	°F	°C	°F				
K-MT 10 - 95	4	58	16	232	5	41	50	122	50	122	230V 1ph 50/60Hz or 24V DC	115V 1ph 50/60Hz or 24V DC	BSPP	65-86

Flow Rates

Model	Pipe Size BSPP	Inlet Flow Rate			
		L/s	m³/min	m³/h	cfm
K-MT 10	1"	30	1,8	105	62
K-MT 15	1"	40	2,4	145	85
K-MT 20	1"	56	3,3	200	118
K-MT 25	1½"	70	4,3	255	150
K-MT 35	1½"	97	5,8	350	206
K-MT 45	1½"	117	7	420	247
K-MT 60	2"	172	10,3	620	365
K-MT 75	2"	208	12,5	750	441
K-MT 95	2½"	261	15,7	940	553

Inlet flow rate relating to 1 bar(a) and 20 °C; relating to the suction performance of the compressor, compression at 7 bar(g) and 35 °C dryer inlet temperature, at 25 °C ambient temperature, 60 % relative humidity.

Product Selection & Correction Factors

For correct operation, compressed air dryers must be sized using for the maximum (summer) inlet temperature, maximum (summer) ambient temperature, minimum inlet pressure, required outlet dewpoint and maximum flow rate of the installation.

To select a dryer, first calculate the MDC (Minimum Drying Capacity) using the formula below then select a dryer from the flow rate table above with a flow rate equal to or above the MDC.

$$\text{Minimum Drying Capacity} = \text{System Flow} \times \text{CFIT} \times \text{CFAT} \times \text{CFMIP} \times \text{CFOD}$$

CFIT - Correction Factor Maximum Inlet Temperature

Maximum Inlet Temperature	°C	25	30	35	40	45	50
	°F	77	86	95	104	113	122
Correction Factor		0.94	0.95	1.00	1.15	1.22	1.28

CFAT - Correction Factor Maximum Ambient Temperature


Maximum Ambient Temperature	°C	25	30	35	40	45	50
	°F	77	86	95	104	113	122
Correction Factor		1.00	1.00	1.00	1.00	1.00	1.00

CFMIP - Correction Factor Minimum Inlet Pressure

Minimum Inlet Pressure	bar g	4	5	6	7	8	9	10	11	12	13	14	15	16
	psi g	58	73	87	100	116	131	145	160	174	189	203	218	232
Correction Factor		1.60	1.33	1.12	1.00	0.88	0.79	0.76	0.74	0.67	0.62	0.59	0.56	0.53

CFOD - Correction Factor Outlet Dewpoint

Outlet Dewpoint	°C	-25	-40	-70
	°F	-13	-40	-100
Correction Factor		1.00	1.00	2.00

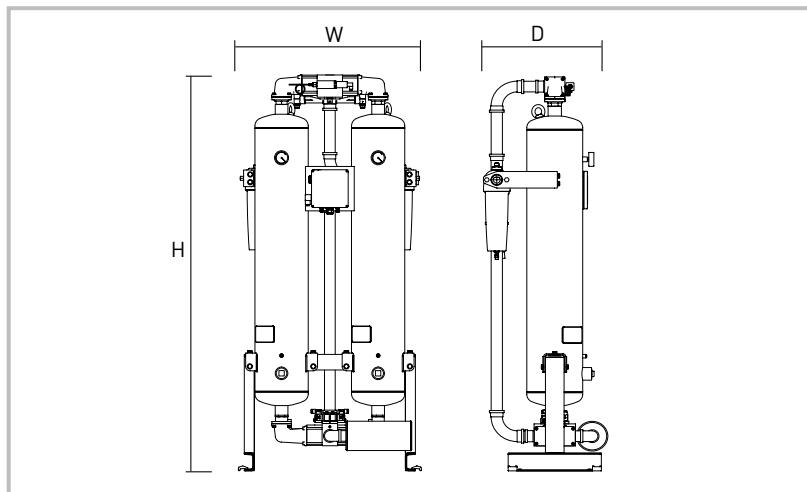

Weights & Dimensions

Model	Dimensions						Weight	
	Height (H)		Width (W)		Depth (D)			
	mm	ins	mm	ins	mm	ins	kg	lbs
K-MT 10	1411	56	814	32	466	18	120	264
K-MT 15	1740	69	814	32	466	18	138	304
K-MT 20	1515	60	645	25	466	18	143	315
K-MT 25	1735	68	623	25	506	20	173	381
K-MT 35	1783	70	778	31	534	21	210	463
K-MT 45	1808	71	807	32	555	22	249	549
K-MT 60	1847	73	857	34	607	24	277	610
K-MT 75	1980	78	952	37	628	25	408	899
K-MT 95	2001	79	998	39	658	26	510	1125

Included Filtration

Model	Dryer Inlet		Dryer Outlet			High Efficiency Dry Particulate Filter (Option)
	High Efficiency Filter	General Purpose Dry Particulate Filter	Oil Vapour Reduction Filter (Option)	High Efficiency Dry Particulate Filter (Option)	High Efficiency Dry Particulate Filter (Option)	
K-MT 10	AAPX025E	AOPX025E	ACSPX025E	AAPX025E	AAPX025E	
K-MT 15	AAPX025E	AOPX025E	ACSPX025E	AAPX025E	AAPX025E	
K-MT 20	AAPX025E	AOPX025E	ACSPX025E	AAPX025E	AAPX025E	
K-MT 25	AAPX030G	AOPX030G	ACSPX030G	AAPX030G	AAPX030G	
K-MT 35	AAPX030G	AOPX030G	ACSPX030G	AAPX030G	AAPX030G	
K-MT 45	AAPX035G	AOPX035G	ACSPX035G	AAPX035G	AAPX035G	
K-MT 60	AAPX040H	AOPX040H	ACSPX040H	AAPX040H	AAPX040H	
K-MT 75	AAPX040H	AOPX040H	ACSPX040H	AAPX040H	AAPX040H	
K-MT 95	AAPX045I	AOPX045I	ACSPX045I	AAPX045I	AAPX045I	

Parker Catalogue Numbers 230V/1ph/50Hz-60Hz

For Dryer Model	Catalogue Number No Dewpoint Sensor	Catalogue Number With Dewpoint Sensor
K-MT 10	K10/16D3-G230M	K10/16D3-G230MT
K-MT 15	K15/16D3-G230M	K15/16D3-G230MT
K-MT 20	K20/16D3-G230M	K20/16D3-G230MT
K-MT 25	K25/16D3-G230M	K25/16D3-G230MT
K-MT 35	K35/16D3-G230M	K35/16D3-G230MT
K-MT 45	K45/16D3-G230M	K45/16D3-G230MT
K-MT 60	K60/16D3-G230M	K60/16D3-G230MT
K-MT 75	K75/16D3-G230M	K75/16D3-G230MT
K-MT 95	K95/16D3-G230M	K95/16D3-G230MT

KA-MT Large Flow Heatless Adsorption Dryers

Dryer Performance

Dryer Models	Dewpoint (Standard)		ISO8573-1:2010 Classification (Standard)		Dewpoint (Option 1)		ISO8573-1:2010 Classification (Option 1)		Dewpoint (Option 2)		ISO8573-1:2010 Classification (Option 2)
	°C	°F			°C	°F			°C	°F	
KA-MT 10 - 95	-40	-40	Class 2.2.1		-70	-100	Class 2.1.1		-25	-13	Class 2.3.1

ISO8573-1 Classifications when used with Parker OIL-X pre / post filtration

Technical Data

Dryer Models	Minimum Operating Pressure		Maximum Operating Pressure		Minimum Operating Temperature		Maximum Operating Temperature		Maximum Ambient Temperature		Electrical Supply (Standard)	Electrical Supply (Optional)	Thread Type	Noise Level
	bar g	psi g	bar g	psi g	°C	°F	°C	°F	°C	°F				
KA-MT 10 - 95	4	58	16	232	5	41	50	122	50	122	230V 1ph 50/60Hz or 24V DC	115V 1ph 50/60Hz or 24V DC	BSPP	65-86

Flow Rates

Model	Pipe Size BSPP	Inlet Flow Rate			
		L/s	m³/min	m³/h	cfm
KA-MT 10	1"	30	1.8	105	62
KA-MT 15	1"	40	2.4	145	85
KA-MT 20	1"	56	3.3	200	118
KA-MT 25	1½"	70	4.3	255	150
KA-MT 35	1½"	97	5.8	350	206
KA-MT 45	1½"	117	7	420	247
KA-MT 60	2"	172	10.3	620	365
KA-MT 75	2"	208	12.5	750	441
KA-MT 95	2½"	261	15.7	940	553

Inlet flow rate relating to 1 bar(a) and 20 °C; relating to the suction performance of the compressor, compression at 7 bar(g) and 35 °C dryer inlet temperature, at 25 °C ambient temperature, 60 % relative humidity.

Product Selection & Correction Factors

For correct operation, compressed air dryers must be sized using for the maximum (summer) inlet temperature, maximum (summer) ambient temperature, minimum inlet pressure, required outlet dewpoint and maximum flow rate of the installation.

To select a dryer, first calculate the MDC (Minimum Drying Capacity) using the formula below then select a dryer from the flow rate table above with a flow rate equal to or above the MDC.

$$\text{Minimum Drying Capacity} = \text{System Flow} \times \text{CFIT} \times \text{CFAT} \times \text{CFMIP} \times \text{CFOD}$$

CFIT - Correction Factor Maximum Inlet Temperature

Maximum Inlet Temperature	°C	25	30	35	40	45	50
	°F	77	86	95	104	113	122
Correction Factor		0.94	0.95	1.00	1.15	1.22	1.28

CFAT - Correction Factor Maximum Ambient Temperature


Maximum Ambient Temperature	°C	25	30	35	40	45	50
	°F	77	86	95	104	113	122
Correction Factor		1.00	1.00	1.00	1.00	1.00	1.00

CFMIP - Correction Factor Minimum Inlet Pressure

Minimum Inlet Pressure	bar g	4	5	6	7	8	9	10	11	12	13	14	15	16
	psi g	58	73	87	100	116	131	145	160	174	189	203	218	232
Correction Factor		1.60	1.33	1.12	1.00	0.88	0.79	0.76	0.74	0.67	0.62	0.59	0.56	0.53

CFOD - Correction Factor Outlet Dewpoint

Outlet Dewpoint	°C	-25	-40	-70
	°F	-13	-40	-100
Correction Factor		1.00	1.00	2.00

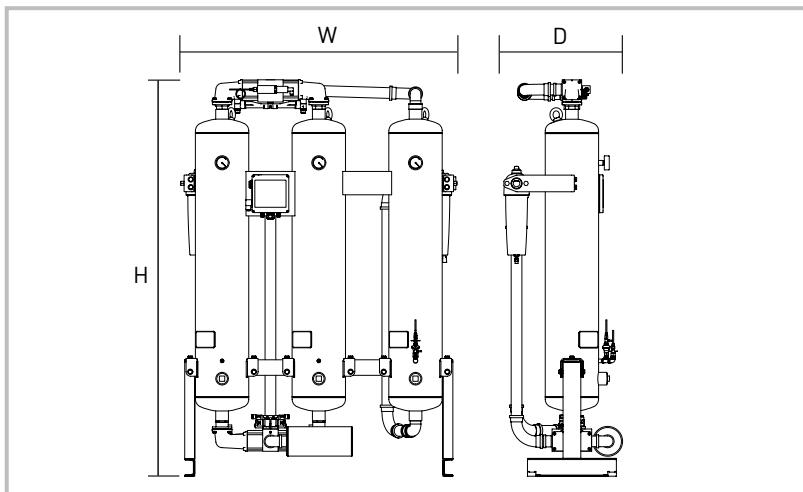

Weights & Dimensions

Model	Dimensions						Weight	
	Height (H)		Width (W)		Depth (D)			
	mm	ins	mm	ins	mm	ins	kg	lbs
KA-MT 10	1411	56	1118	44	466	18	161	355
KA-MT 15	1739	68	1118	44	466	18	193	425
KA-MT 20	1515	60	949	37	466	18	193	425
KA-MT 25	1735	68	926	36	506	20	234	516
KA-MT 35	1783	70	1213	47	534	21	283	624
KA-MT 45	1808	71	1245	49	555	22	334	736
KA-MT 60	1859	73	1292	51	607	24	428	944
KA-MT 75	1980	78	1447	57	628	25	555	1224
KA-MT 95	2001	79	1493	59	658	26	698	1539

Included Filtration

Model	Dryer Inlet		Dryer Outlet		High Efficiency Dry Particulate Filter (Option)
	High Efficiency Filter	General Purpose Dry Particulate Filter	AOPX025E	AAPX025E	
KA-MT 10	AAPX025E	AOPX025E	AAPX025E	AAPX025E	
KA-MT 15	AAPX025E	AOPX025E	AAPX025E	AAPX025E	
KA-MT 20	AAPX025E	AOPX025E	AAPX025E	AAPX025E	
KA-MT 25	AAPX030G	AOPX030G	AAPX030G	AAPX030G	
KA-MT 35	AAPX030G	AOPX030G	AAPX030G	AAPX030G	
KA-MT 45	AAPX035G	AOPX035G	AAPX035G	AAPX035G	
KA-MT 60	AAPX040H	AOPX040H	AAPX040H	AAPX040H	
KA-MT 75	AAPX040H	AOPX040H	AAPX040H	AAPX040H	
KA-MT 95	AAPX045I	AOPX045I	AAPX045I	AAPX045I	

Included in standard scope of supply:
Prefilter (AA) including float drain.
Afterfilter (AO) including manual drain.

Optional: (Delivered separately):
Oil vapour reduction filter (ACS)
High efficiency dry particulate filter (AA) including manual drain

Parker Catalogue Numbers 230V/1ph/50Hz-60Hz

For Dryer Model	Catalogue Number No Dewpoint Sensor	Catalogue Number With Dewpoint Sensor
KA-MT 10	K10/16DA3-G230M	K10/16DA3-G230MT
KA-MT 15	K15/16DA3-G230M	K15/16DA3-G230MT
KA-MT 20	K20/16DA3-G230M	K20/16DA3-G230MT
KA-MT 25	K25/16DA3-G230M	K25/16DA3-G230MT
KA-MT 35	K35/16DA3-G230M	K35/16DA3-G230MT
KA-MT 45	K45/16DA3-G230M	K45/16DA3-G230MT
KA-MT 60	K60/16DA3-G230M	K60/16DA3-G230MT
KA-MT 75	K75/16DA3-G230M	K75/16DA3-G230MT
KA-MT 95	K95/16DA3-G230M	K95/16DA3-G230MT

KE-MT Large Flow Heatless Adsorption Dryers

Dryer Performance

Dryer Models	Dewpoint (Standard)		ISO8573-1:2010 Classification (Standard)		Dewpoint (Option 1)		ISO8573-1:2010 Classification (Option 1)		Dewpoint (Option 2)		ISO8573-1:2010 Classification (Option 2)	
	°C	°F			°C	°F			°C	°F		
KE-MT 120 - 600	-40	-40	Class 2.2.2		-70	-100	Class 2.1.2		-20	-4	Class 2.3.2	

ISO8573-1 Classifications when used with Parker OIL-X pre / post filtration

Technical Data

Dryer Models	Minimum Operating Pressure		Maximum Operating Pressure		Minimum Operating Temperature		Maximum Operating Temperature		Maximum Ambient Temperature		Electrical Supply (Standard)	Electrical Supply (Optional)	Thread Type	Noise Level
	bar g	psi g	bar g	psi g	°C	°F	°C	°F	°C	°F				
KE-MT 120 - 600	4	58	10*	145	5	41	50	122	50	122	230V 1ph 50Hz/60Hz	115V / 1ph 50/60Hz	Flange	< 120

* Higher operating pressures on request

Flow Rates

Model	Pipe Size	Inlet Flow Rate			
		L/s	m³/min	m³/hr	cfm
KE-MT 120	DN 50	333	20	1200	706
KE-MT 150	DN 65	430	26	1550	912
KE-MT 200	DN 65	556	33	2000	1177
KE-MT 250	DN 80	695	42	2500	1472
KE-MT 300	DN 80	833	50	3000	1766
KE-MT 380	DN 100	1056	63	3800	2237
KE-MT 500	DN 100	1347	81	4850	2855
KE-MT 600	DN 125	1695	102	6100	3590

Stated flows are for operation at 7 bar (g) (102 psi g) with reference to 20°C, 1 bar (a), 0% relative water vapour pressure. For flows at other pressures, apply the correction factors shown below.

Dryers for smaller flows are available on request.

Product Selection & Correction Factors

For correct operation, compressed air dryers must be sized using for the maximum (summer) inlet temperature, maximum (summer) ambient temperature, minimum inlet pressure, required outlet dewpoint and maximum flow rate of the installation.

To select a dryer, first calculate the MDC (Minimum Drying Capacity) using the formula below then select a dryer from the flow rate table above with a flow rate equal to or above the MDC.

$$\text{Minimum Drying Capacity} = \text{System Flow} \times \text{CFIT} \times \text{CFAT} \times \text{CFMIP} \times \text{CFOD}$$

CFIT - Correction Factor Maximum Inlet Temperature

Maximum Inlet Temperature	°C	25	30	35	40	45	50
	°F	77	86	95	104	113	122
Correction Factor		0.94	0.95	1.00	1.15	1.22	1.28

CFAT - Correction Factor Maximum Ambient Temperature


Maximum Ambient Temperature	°C	25	30	35	40	45	50
	°F	77	86	95	104	113	122
Correction Factor		1.00	1.00	1.00	1.00	1.00	1.00

CFMIP - Correction Factor Minimum Inlet Pressure

Minimum Inlet Pressure	bar g	4	5	6	7	8	9	10
	psi g	58	73	87	100	116	131	145
Correction Factor		1.60	1.33	1.12	1.00	0.88	0.79	0.76

CFOD - Correction Factor Outlet Dewpoint

Outlet Dewpoint	°C	-25	-40	-70
	°F	-13	-40	-100
Correction Factor		1.00	1.00	2.00

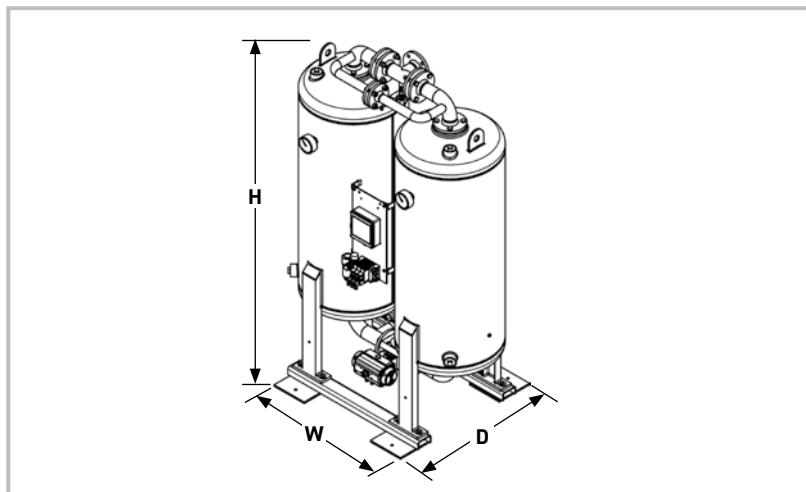

Weights & Dimensions

Model	Pipe Size BSPP or NPT	Dimensions						Weight	
		Height (H)		Width (W)		Depth (D)			
		mm	ins	mm	ins	mm	ins	kg	lbs
KE-MT 120	DN 50	2080	82	1060	42	840	33	640	1411
KE-MT 150	DN 65	2120	83	1270	50	900	35	830	1830
KE-MT 200	DN 65	2160	85	1350	53	990	39	955	2106
KE-MT 250	DN 80	2210	87	1530	60	1040	41	1075	2370
KE-MT 300	DN 80	2255	88	1600	62	1100	43	1500	3307
KE-MT 380	DN 100	2385	93	1875	73	1200	47	1990	4388
KE-MT 500	DN 100	2660	104	1925	76	1250	49	2410	5314
KE-MT 600	DN 125	2816	111	2155	85	1304	51	2700	5953

Recommended Filtration

Model	Dryer Inlet		Dryer Outlet		
	General Purpose Prefilter mandatory*	High Efficiency Filter mandatory*	General Purpose Dry Particulate Filter mandatory*	Oil Vapour Reduction Filter optional	High Efficiency Dry Particulate Filter optional
KE-MT 120	AOPX050I	AAPX050I	AOPX050I	ACSPX050I	AAPX050I
KE-MT 150	AOPX050I	AAPX050I	AOPX050I	ACSPX050I	AAPX050I
KE-MT 200	AOPX055I	AAPX055I	AOPX055I	ACSPX055I	AAPX055I
KE-MT 250	AOPX060K	AAPX060K	AOPX060K	ACSPX060K	AAPX060K
KE-MT 300	AOPX060K	AAPX060K	AOPX060K	ACSPX060K	AAPX060K
KE-MT 380	AO070O	AA070O	AO070O	ACS070O	AA070O
KE-MT 500	AO075O	AA075P	AO075O	ACS075O	AA075O
KE-MT 600	AO075O	AA075P	AO075O	ACS075O	AA075O

* prefilters (AO and AA) and afterfilter (AO) are mandatory but not included in scope of supply and must be ordered separately.
The filtration is mandatory to maintain trouble-free dryer operation.

Parker Catalogue Numbers

Model	Catalogue Number No Dewpoint Control	Catalogue Number With Dewpoint Control
KE-MT 120	K120/10D1-F230M	K120/10D1-F230MT
KE-MT 150	K150/10D1-F230M	K150/10D1-F230MT
KE-MT 200	K200/10D1-F230M	K200/10D1-F230MT
KE-MT 250	K250/10D1-F230M	K250/10D1-F230MT
KE-MT 300	K300/10D1-F230M	K300/10D1-F230MT
KE-MT 380	K380/10D1-F230M	K380/10D1-F230MT
KE-MT 500	K500/10D1-F230M	K500/10D1-F230MT
KE-MT 600	K600/10D1-F230M	K600/10D1-F230MT

WVM Large Flow Vacuum Low Energy Adsorption Dryers

Dryer Performance

Dryer Models	Dewpoint (Standard)		ISO8573-1:2010 Classification (Standard)		Dewpoint (Option 1)		ISO8573-1:2010 Classification (Option 1)		Dewpoint (Option 2)		ISO8573-1:2010 Classification (Option 2)	
	°C	°F			°C	°F			°C	°F		
WVM	-40	-40	Class 2.2.2		-70	-100	Class 2.1.2		-20	-4	Class 2.3.2	

ISO8573-1 Classifications when used with OIL-X pre / post filtration

Technical Data

Dryer Models	Minimum Operating Pressure		Maximum Operating Pressure*		Minimum Operating Temperature		Maximum Operating Temperature		Maximum Ambient Temperature		Electrical Supply (Standard)	Electrical Supply (Optional)	Connection	Noise Level
	bar g	psi g	bar g	psi g	°C	°F	°C	°F	°C	°F				
WVM	4	58	11	145	5	41	40	104	40	104	400V 3ph 50Hz	On request	Flanged	80-85

*For higher operating pressure please contact Parker GSFE Division

Flow Rates

Model	Pipe Size	Inlet Flow Rate				Average Power kW
		L/s	m³/min	m³/hr	cfm	
WVM 45	DN 50	125	7.5	450	265	3.6
WVM 60	DN 50	169	10.2	610	359	5.3
WVM 80	DN 50	222	13.4	800	471	6.8
WVM 125	DN 80	325	19.5	1170	689	9.5
WVM 155	DN 80	408	24.5	1470	865	12.8
WVM 210	DN 80	569	34.2	2050	1207	16.8
WVM 310	DN 100	847	50.9	3050	1795	25.4
WVM 370	DN 100	1028	61.8	3700	2178	30.8
WVM 520	DN 150	1403	84.3	5050	2972	41.8
WVM 615	DN 150	1681	101.0	6050	3561	52.6
WVM 750	DN 150	2028	121.9	7300	4297	59.5

Inlet flow rate relating to 1 bar(a) and 20 °C;

relating to the suction performance of the compressor, compression at 7 bar(g) and 35 °C dryer inlet temperature, at 25 °C ambient temperature, 60 % relative humidity.

Dryers for higher flows are available on request.

Product Selection & Correction Factors

For correct operation, compressed air dryers must be sized using for the maximum inlet temperature, maximum ambient temperature, minimum inlet pressure, required outlet dewpoint and maximum flow rate of the installation.

To select a dryer, first calculate the MDC (Minimum Drying Capacity) using the formula below then select a dryer from the flow rate table above with a flow rate equal to or above the MDC.

$$\text{Minimum Drying Capacity} = \text{System Flow} \times \text{CFMIT} \times \text{CFMAT} \times \text{CFMIP} \times \text{CFOD}$$

CFMIT - Correction Factor Maximum Inlet Temperature

Maximum Inlet Temperature	°C	25	30	35	40
	°F	77	86	95	104
Correction Factor		0.80	0.91	1.00	1.80

CFAT - Correction Factor Maximum Ambient Temperature

Maximum Ambient Temperature	°C	20	25	30	35	40
	°F	68	77	86	95	104
Correction Factor		1.00	1.00	1.00	1.00	1.00

25% rel. hum. at 40°C; 37% rel. hum. at 35°C; 50% rel. hum. at 30°C; 70% rel. hum. at 25°C; 90% rel. hum. at 20°C

For higher ambient temperature and/or higher relative humidity please contact Parker GSFE Division.


CFMIP - Correction Factor Minimum Inlet Pressure

Minimum Inlet Pressure	bar g	4	5	6	7	8	9	10	11
	psi g	58	73	87	100	116	131	145	160
Correction Factor		2.00	1.39	1.18	1.00	0.99	0.87	0.79	0.56

CFOD - Correction Factor Outlet Dewpoint

Outlet Dewpoint	°C	-20	-25	-40	-70
	°F	-4	-13	-40	-100
Correction Factor		0.95	0.95	1.00	*

* Selection for Dewpoint -70°C -
Please Contact Parker GSFE Division

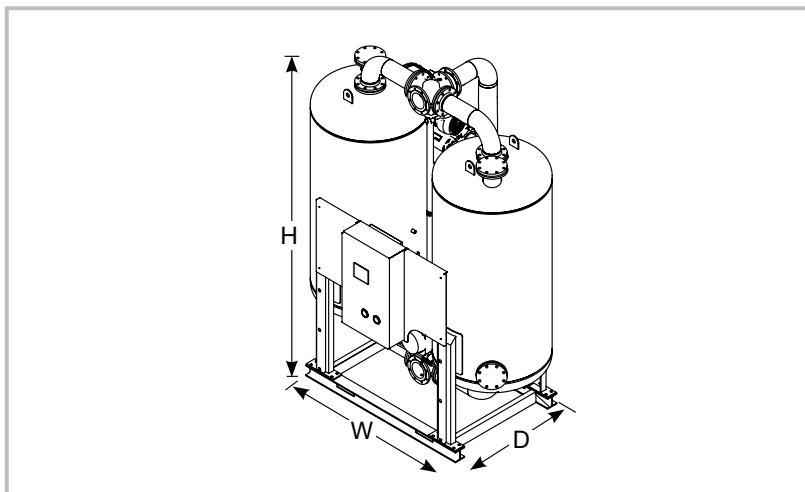

Weights & Dimensions

Model	Dimensions (Dryer Only)						Weight (Dryer Only)	
	Height (H)		Width (W)		Depth (D)			
	mm	ins	mm	ins	mm	ins	kg	lbs
WVM 45	2029	80	1222	48	1219	48	770	1698
WVM 60	2029	80	1222	48	1219	48	800	1764
WVM 80	2379	94	1222	48	1219	48	900	1985
WVM 125	2151	85	1692	67	1412	56	1350	2977
WVM 155	2301	91	1692	67	1412	56	1460	3219
WVM 210	2751	108	1692	67	1462	58	1870	4123
WVM 310	2692	106	2115	83	1702	67	2610	5755
WVM 370	2992	118	2115	83	1702	67	2900	6395
WVM 520	3210	126	2582	102	1910	75	4275	9426
WVM 615	3460	136	2582	102	1910	75	4735	10441
WVM 750	3450	137	2782	110	2010	79	5380	11863

Required Filtration

Model	Dryer Connection	Dryer Inlet	Dryer Outlet
		High Efficiency Filter	General Purpose Dry Particulate Filter
WVM 45	DN 50	AAPX035G	AOPX035G
WVM 60	DN 50	AAPX040H	AOPX040H
WVM 80	DN 50	AAPX045I	AOPX045I
WVM 125	DN 80	AA065N	AO065N
WVM 155	DN 80	AA065N	AO065N
WVM 210	DN 80	AA065N	AO065N
WVM 310	DN 100	AA070O	AO070O
WVM 370	DN 100	AA070O	AO070O
WVM 520	DN 150	AA075P	AO075P
WVM 615	DN 150	AA075P	AO075P
WVM 750	DN 150	AA080P	AO080P

Parker Catalogue Numbers

Model	Catalogue Number	Model	Catalogue Number
WVM 45	W45/11VM5-F400CT	WVM 310	W310/11VM5-F400CT
WVM 60	W60/11VM5-F400CT	WVM 370	W370/11VM5-F400CT
WVM 80	W80/11VM5-F400CT	WVM 520	W520/11VM5-F400CT
WVM 125	W125/11VM5-F400CT	WVM 615	W615/11VM5-F400CT
WVM 155	W155/11VM5-F400CT	WVM 750	W750/11VM5-F400CT
WVM 210	W210/11VM5-F400CT		

ATT+ Green Hybrid Low Energy Dryers

Dryer Performance

Dryer Models	Dewpoint (Standard)		ISO8573-1:2010 Classification (Standard)		Dewpoint (Option 1)		ISO8573-1:2010 Classification (Option 1)		Dewpoint (Option 2)		ISO8573-1:2010 Classification (Option 2)	
	°C	°F			°C	°F			°C	°F		
ATT+	-40	-40	Class 2.2.2		-70	-100	Class 2.1.2		-20	-4	Class 2.3.2	

ISO8573-1 Classifications when used with Parker OIL-X pre / post filtration

Technical Data

Dryer Models	Minimum Operating Pressure		Maximum Operating Pressure		Minimum Operating Temperature		Maximum Operating Temperature		Maximum Ambient Temperature		Electrical Supply (Standard)	Electrical Supply (Optional)	Thread Type	Noise Level (dB(A))
	bar g	psi g	bar g	psi g	°C	°F	°C	°F	°C	°F				
ATT+ 060/090/140	2	29	12	174	5	41	65	149	50	122	230V 1ph 50Hz	N/A	BSPP	<75
ATT+ 260/340	4	58	12	174	5	41	65	149	50	122	400V 3ph 50Hz	N/A	BSPP	<75

Flow Rates

Dryer Models	Pipe Size	Inlet Flow Rate					Average Power kW
		L/s	m³/min	m³/hr	cfm		
ATT+ 060	1½"	100	6	360	212	1.9	
ATT+ 090	1½"	150	9	540	318	2.3	
ATT+ 140	2"	233	14	840	494	2.6	
ATT+ 260	2½"	433	26	1560	918	4.2	
ATT+ 340	2½"	567	34	2040	1200	5.6	

Stated flows are for operation at 7 bar (g) (102 psi g) with reference to 20°C, 1 bar (a), 0% relative water vapour pressure. For flows at other pressures, apply the correction factors shown below.

Product Selection & Correction Factors

For correct operation, compressed air dryers must be sized using for the maximum (summer) inlet temperature, maximum (summer) ambient temperature, minimum inlet pressure, required outlet dewpoint and maximum flow rate of the installation.

To select a dryer, first calculate the MDC (Minimum Drying Capacity) using the formula below then select a dryer from the flow rate table above with a flow rate equal to or above the MDC.

$$\text{Minimum Drying Capacity} = \text{System Flow} \times \text{CFIT} \times \text{CFAT} \times \text{CFMIP} \times \text{CFOD}$$

CFIT - Correction Factor Maximum Inlet Temperature

Maximum Inlet Temperature	°C	25	30	35	40	45	50	55	60	65
	°F	77	86	95	104	113	122	131	140	149
Correction Factor ATT+		0.82	0.82	1.00	1.23	1.45	1.82	2.44	2.63	2.94

CFAT - Correction Factor Maximum Ambient Temperature


Maximum Ambient Temperature	°C	20	25	30	35	40	45	50
	°F	68	77	86	95	104	113	122
Correction Factor ATT+ 060/090		0.93	1.00	1.06	1.14	1.23	1.33	1.47
Correction Factor ATT+ 140/260/340		0.94	1.00	1.05	1.11	1.20	1.30	1.39

CFMIP - Correction Factor Minimum Inlet Pressure

Minimum Inlet Pressure	bar g	4	5	6	7	8	9	10	11	12	13	14	15	16
	psi g	58	73	87	100	116	131	145	160	174	189	203	218	232
Correction Factor ATT+		1.61	1.33	1.15	1.00	0.96	0.93	0.91	0.88	0.87	N/A	N/A	N/A	N/A

CFOD - Correction Factor Outlet Dewpoint

Outlet Dewpoint	°C	-20	-40	-70
	°F	-4	-40	-100
Correction Factor		1	1	1

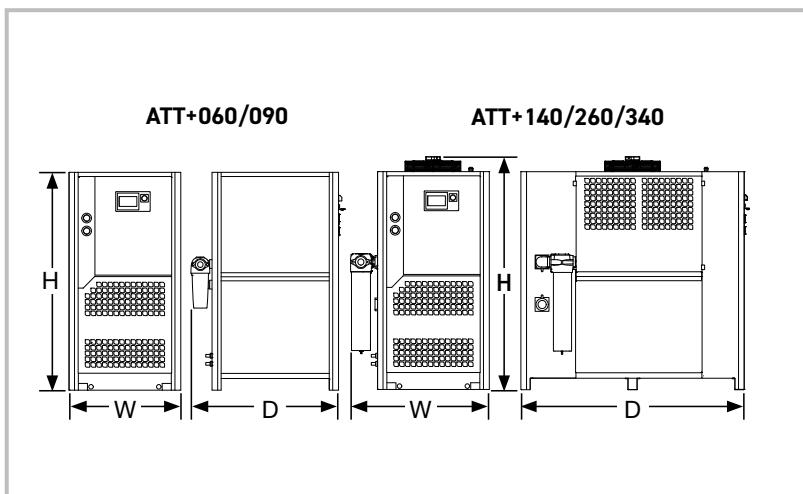

Controller Main Functions

Hybrid Dryer	Controller Function												
	Touchscreen	Visual Fault Indication	Service Indicator	EST - Energy Saving Technology	Visual Operation Status (Strip LED)	Power On Indication	Dewpoint Display	Alarm History	0-10V / 4-20mA Dewpoint Re-transmission	Data Log/ Retrieve*	Local Web Server	Modbus Protocol**	IOT Ready
ATT+	7"	•	•	•	•	•	•	•	•	•	•	•	•

*USB **RTU RS485 TCP/IP RJ45

Weights & Dimensions

Model	Dimensions (with Filters)						Weight (with Filters)	
	Height (H)		Width (W)		Depth (D)			
	mm	ins	mm	ins	mm	ins	kg	lbs
ATT+ 060	1900	74.8	973	38.3	1312	51.7	380	838
ATT+ 090	1900	74.8	973	38.3	1312	51.7	420	926
ATT+ 140	2030	79.9	1180	46.5	1974	77.7	650	1433
ATT+ 260	2030	79.9	1205	47.4	1974	77.7	920	2028
ATT+ 340	2030	79.9	1205	47.4	1974	77.7	960	2116

Included Filtration

Model	Pipe Size BSPP	Dryer Inlet		Dryer Outlet			
		General Purpose Pre-filter	High Efficiency Filter	Oil Vapour Reduction Filter	General Purpose Dry Particulate Filter	High Efficiency Dry Particulate Filter	
ATT+ 060	1½"	AOPX030G	AAPX030G	-	AOPX030G		-
ATT+ 090	1½"	AOPX035G	AAPX035G	-	AOPX035G		-
ATT+ 140	2"	AOPX045I	AAPX045I	-	AOPX045I		-
ATT+ 260	2½"	AOPX055J	AAPX055J	-	AOPX055J		-
ATT+ 340	2½"	AOPX055J	AAPX055J	-	AOPX055J		-

Parker Catalogue Numbers

Model	Catalogue Number Standard	Catalogue Number With Bypass	Catalogue Number With Bypass & Temperature Probe	Catalogue Number With Temperature Probe
ATT+ 060	ATT060+A23015012EITS	ATT060+A23015012EITSTB	ATT060+A23015012EITSTBTP	ATT060+A23015012EITSTP
ATT+ 090	ATT090+A23015012EITS	ATT090+A23015012EITSTB	ATT090+A23015012EITSTBTP	ATT090+A23015012EITSTP
ATT+ 140	ATT140+A40035012EITS	ATT140+A40035012EITSTB	ATT140+A40035012EITSTBTP	ATT140+A40035012EITSTP
ATT+ 260	ATT260+A40035012EITS	ATT260+A40035012EITSTB	ATT260+A40035012EITSTBTP	ATT260+A40035012EITSTP
ATT+ 340	ATT340+A40035012EITS	ATT340+A40035012EITSTB	ATT340+A40035012EITSTBTP	ATT340+A40035012EITSTP

SPS Direct Expansion Refrigeration Dryers

Dryer Performance

Dryer Models	Dewpoint (Standard)		Dewpoint (Option 1)		Dewpoint (Option 2)	
	°C	°F	°C	°F	°C	°F
SPS	+3	+37	+7	+45	+10	+50

Technical Data

Dryer Models	Min Operating Pressure		Max Operating Pressure		Min Operating Temperature		Max Operating Temperature		Max Ambient Temperature		Electrical Supply (Standard)	Electrical Supply (Optional)	Thread Connections	Noise Level
	bar g	psi g	bar g	psi g	°C	°F	°C	°F	°C	°F				
	SPS 004-062	2	29	16	232	5	41	65	149	50	122	230V 1ph 50Hz / 60Hz	N/A	BSPP
SPS 080-100			14	203										

Flow Rates

Model	Pipe Size	Inlet Flow Rate 50 Hz				50Hz kW	Inlet Flow Rate 60Hz				60Hz kW
		L/s	m³/min	m³/hr	cfm		L/s	m³/min	m³/hr	cfm	
SPS 004	1/2"	7	0.4	24	14	0.13	8	0.47	28	16	0.16
SPS 007	1/2"	12	0.7	42	25	0.14	13	0.78	47	28	0.17
SPS 009	1/2"	15	0.9	54	32	0.15	17	1.00	60	35	0.19
SPS 014	3/4"	23	1.4	84	49	0.15	27	1.60	96	57	0.18
SPS 018	3/4"	30	1.8	108	64	0.16	34	2.07	124	73	0.20
SPS 026	1"	43	2.6	156	92	0.29	49	2.93	176	104	0.36
SPS 032	1"	53	3.2	192	113	0.30	61	3.63	218	128	0.37
SPS 040	1"	67	4.0	240	141	0.31	76	4.53	272	160	0.38
SPS 052	1 1/2"	87	5.2	312	184	0.46	100	6.02	361	212	0.56
SPS 062	1 1/2"	103	6.2	372	219	0.57	119	7.15	429	253	0.69
SPS 080	1 1/2"	133	8.0	480	282	0.73	154	9.25	555	327	0.90
SPS 100	1 1/2"	167	10.0	600	353	0.74	191	11.48	689	406	0.91

Stated flows are for operation at 7 bar (g) (102 psi g) with reference to 20°C, 1 bar (a), 0% relative water vapour pressure, 25 °C cooling air temperature, 35 °C air inlet temperature and +3°C pressure dewpoint. All models supplied with low GWP refrigerant R513A.

For flows at other conditions, apply the correction factors shown below.

Product Selection & Correction Factors

For correct operation, compressed air dryers must be sized using for the maximum (summer) inlet temperature, maximum (summer) ambient temperature, minimum inlet pressure, required outlet dewpoint and maximum flow rate of the installation.

To select a dryer, first calculate the MDC (Minimum Drying Capacity) using the formula below then select a dryer from the flow rate table above with a flow rate equal to or above the MDC.

$$\text{Minimum Drying Capacity} = \text{System Flow} \times \text{CFIT} \times \text{CFAT} \times \text{CFMIP} \times \text{CFOD}$$

CFIT - Correction Factor Maximum Inlet Temperature

Maximum Inlet Temperature	°C	25	30	35	40	45	50	55	60	65
	°F	77	86	95	104	113	122	131	140	149
Correction Factor	50Hz	0.65	0.83	1.00	1.30	1.61	2.00	2.33	2.38	2.50
	60Hz	0.66	0.85	1.00	1.32	1.61	2.04	2.56	2.63	2.78

CFAT - Correction Factor Maximum Ambient Temperature


Maximum Ambient Temperature	°C	20	25	30	35	40	45	50
	°F	68	77	86	95	104	113	122
Correction Factor	50Hz	0.93	1.00	1.02	1.09	1.15	1.22	1.28
	60Hz	0.96	1.00	1.06	1.11	1.18	1.25	1.33

CFMIP - Correction Factor Minimum Inlet Pressure

Minimum Inlet Pressure	bar g	3	4	5	6	7	8	9	10	11	12	13	14	15	16
	psi g	44	58	73	87	100	116	131	145	160	174	189	203	218	232
Correction Factor	50Hz	1.35	1.23	1.11	1.06	1.00	0.93	0.85	0.83	0.81	0.79	0.77	0.75	0.73	0.71
	60Hz	1.45	1.23	1.11	1.06	1.00	0.93	0.85	0.83	0.81	0.79	0.77	0.75	0.73	0.71

CFOD - Correction Factor Outlet Dewpoint

Outlet Dewpoint	°C	+3	+5	+7
	°F	+37	+41	+45
Correction Factor	50Hz	1.00	0.78	0.70
	60Hz	1.00	0.79	0.72

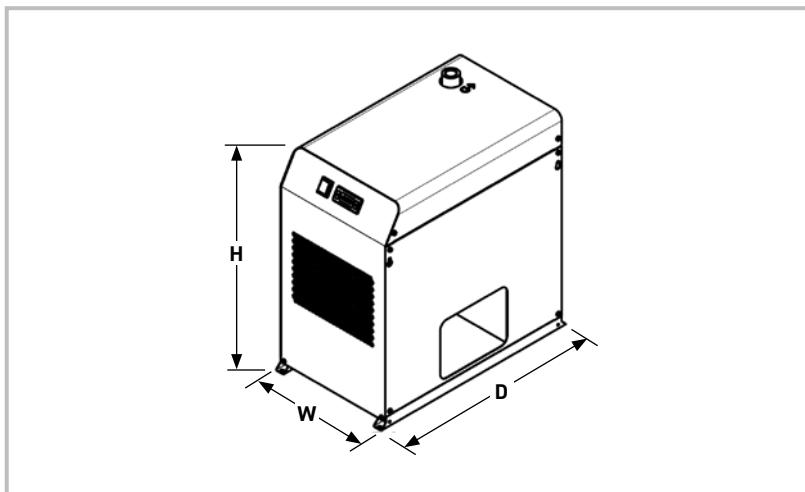

Weights & Dimensions

Model	Dimensions						Weight		Dryer Inlet	Dryer Outlet
	Height (H)		Width (W)		Depth (D)				General Purpose Pre-Filter	High Efficiency Post Filter
	mm	ins	mm	ins	mm	ins	kg	lbs		
SPS 004	520	20.5	300	11.8	400	15.7	24	53	AOPX010C	AAPX010C
SPS 007	520	20.5	300	11.8	400	15.7	24	53	AOPX015C	AAPX015C
SPS 009	520	20.5	300	11.8	400	15.7	25	55	AOPX015C	AAPX015C
SPS 014	580	22.8	330	13.0	550	21.7	35	77	AOPX020D	AAPX020D
SPS 018	580	25.6	330	13.0	550	21.7	36	79	AOPX020D	AAPX020D
SPS 026	650	25.6	400	15.7	630	24.8	46	101	AOPX025E	AAPX025E
SPS 032	650	25.6	400	15.7	630	24.8	46	101	AOPX025E	AAPX025E
SPS 040	650	25.6	400	15.7	630	24.8	47	104	AOPX025E	AAPX025E
SPS 052	650	25.6	400	15.7	630	24.8	53	117	AOPX030G	AAPX030G
SPS 062	650	25.6	400	15.7	630	24.8	55	121	AOPX030G	AAPX030G
SPS 080	840	33.1	450	17.7	780	30.7	80	176	AOPX035G	AAPX035G
SPS 100	840	33.1	450	17.7	780	30.7	80	176	AOPX035G	AAPX035G

Parker Catalogue Numbers

Model	Catalogue Number With Timed Drain	Catalogue Number With Electronic Drain	Catalogue Number With Electronic Drain & Energy Saving	Catalogue Number With External Float Drain
SPS 004	SPS004-A2301DF16TIS	SPS004-A2301DF16EXS	-	SPS004-A2301DF16FHS
SPS 007	SPS007-A2301DF16TIS	SPS007-A2301DF16EXS	-	SPS007-A2301DF16FHS
SPS 009	SPS009-A2301DF16TIS	SPS009-A2301DF16EXS	-	SPS009-A2301DF16FHS
SPS 014	SPS014-A2301DF16TIS	SPS014-A2301DF16EXS	-	SPS014-A2301DF16FHS
SPS 018	SPS018-A2301DF16TIS	SPS018-A2301DF16EXS	-	SPS018-A2301DF16FHS
SPS 026	SPS026-A2301DF16TIS	SPS026-A2301DF16EXS	SPS026-A2301DF16EXSES	SPS026-A2301DF16FHS
SPS 032	SPS032-A2301DF16TIS	SPS032-A2301DF16EXS	SPS032-A2301DF16EXSES	SPS032-A2301DF16FHS
SPS 040	SPS040-A2301DF16TIS	SPS040-A2301DF16EXS	SPS040-A2301DF16EXSES	SPS040-A2301DF16FHS
SPS 052	SPS052-A2301DF16TIS	SPS052-A2301DF16EXS	SPS052-A2301DF16EXSES	SPS052-A2301DF16FHS
SPS 062	SPS062-A2301DF16TIS	SPS062-A2301DF16EXS	SPS062-A2301DF16EXSES	SPS062-A2301DF16FHS
SPS 080	SPS080-A2301DF14TIS	SPS080-A2301DF14EXS	SPS080-A2301DF14EXSES	SPS080-A2301DF14FHS
SPS 100	SPS100-A2301DF14TIS	SPS100-A2301DF14EXS	SPS100-A2301DF14EXSES	SPS100-A2301DF14FHS

PSE Direct Expansion Refrigeration Dryers

Dryer Performance

Dryer Models	Dewpoint (Standard)		Dewpoint (Option 1)		Dewpoint (Option 2)	
	°C	°F	°C	°F	°C	°F
PSE	+3	+37	+7	+45	+10	+50

Technical Data

Dryer Models	Min Operating Pressure		Max Operating Pressure		Min Operating Temperature		Max Operating Temperature		Max Ambient Temperature		Electrical Supply (Standard)	Electrical Supply (Optional)	Thread Connections	Noise Level
	bar g	psi g	bar g	psi g	°C	°F	°C	°F	°C	°F				
PSE 120 - 1800	2	29	14	203	5	41	65	149	50	122	400V 3ph 50Hz / 460V 3ph 60Hz	N/A	BSPP & DIN Flange	<75

Flow Rates

Model	Pipe Size	Inlet Flow Rate at 50Hz				Absorbed Power at 50Hz kW	Inlet Flow Rate at 60Hz				Absorbed Power at 60Hz kW
		L/s	m³/min	m³/hr	cfm		L/s	m³/min	m³/hr	cfm	
PSE 120	2"	200	12	720	424	1.32	215	13	773	455	1.7
PSE 140	2"	233	14	840	494	1.32	252	15	907	534	1.7
PSE 180	2"	300	18	1080	636	1.51	323	19	1163	685	1.9
PSE 220	2½"	367	22	1320	777	1.79	399	24	1435	845	2.2
PSE 260	2½"	433	26	1560	918	2.05	474	28	1708	1005	2.5
PSE 300	2½"	500	30	1800	1059	2.62	539	32	1941	1142	3.3
PSE 350	2½"	583	35	2100	1236	3.22	624	37	2247	1323	4.0
PSE 460	DN100	767	46	2760	1625	3.22	835	50	3005	1769	3.9
PSE 520	DN100	867	52	3120	1836	4.55	941	56	3386	1993	5.6
PSE 630	DN100	1050	63	3780	2225	4.55	1172	70	4219	2483	5.6
PSE 750	DN150	1250	75	4500	2649	6.52	1381	83	4970	2925	8.0
PSE 900	DN150	1500	90	5400	3178	9.05	1655	99	5957	3506	11.0
PSE 1200	DN150	2000	120	7200	4238	9.05	2210	133	7956	4683	11.0
PSE 1500	DN200	2500	150	9000	5297	11.17	2760	166	9935	5848	13.6
PSE 1800	DN200	3000	180	10800	6357	13.12	3281	197	11812	6952	16.4

Stated flows are for operation at 7 bar (g) (102 psi g) with reference to 20°C, 1 bar (a), 0% relative water vapour pressure, 25 °C cooling air temperature, 35 °C air inlet temperature and +3°C pressure dewpoint. All models supplied with low GWP refrigerant R513A.

For flows at other conditions, apply the correction factors shown below.

Product Selection & Correction Factors

For correct operation, compressed air dryers must be sized using for the maximum (summer) inlet temperature, maximum (summer) ambient temperature, minimum inlet pressure, required outlet dewpoint and maximum flow rate of the installation.

To select a dryer, first calculate the MDC (Minimum Drying Capacity) using the formula below then select a dryer from the flow rate table above with a flow rate equal to or above the MDC.

$$\text{Minimum Drying Capacity} = \text{System Flow} \times \text{CFIT} \times \text{CFAT} \times \text{CFMIP} \times \text{CFOD}$$

CFIT - Correction Factor Maximum Inlet Temperature

Maximum Inlet Temperature	°C	30	35	40	45	50	55	60	65
	°F	86	95	104	113	122	131	140	149
Correction Factor - 50Hz & 60Hz		0.81	1.00	1.23	1.49	1.82	2.44	2.63	2.94

CFAT - Correction Factor Maximum Ambient Temperature


Maximum Ambient Temperature	°C	20	25	30	35	40	45	50	55
	°F	68	77	86	95	104	113	122	131
Correction Factor - 50Hz & 60Hz		0.97	1.00	1.04	1.08	1.14	1.22	1.39	

CFMIP - Correction Factor Minimum Inlet Pressure

Minimum Inlet Pressure	bar g	3	4	5	6	7	8	9	10	11	12	13	14
	psi g	44	58	73	87	100	116	131	145	160	174	189	203
Correction Factor - 50Hz & 60Hz		1.45	1.25	1.14	1.04	1.00	0.96	0.93	0.91	0.88	0.87	0.85	0.85

CFOD - Correction Factor Outlet Dewpoint

Outlet Dewpoint	°C	+3	+5	+7	+10
	°F	+37	+41	+45	+50
Correction Factor - 50Hz & 60Hz		1.00	0.90	0.81	0.69

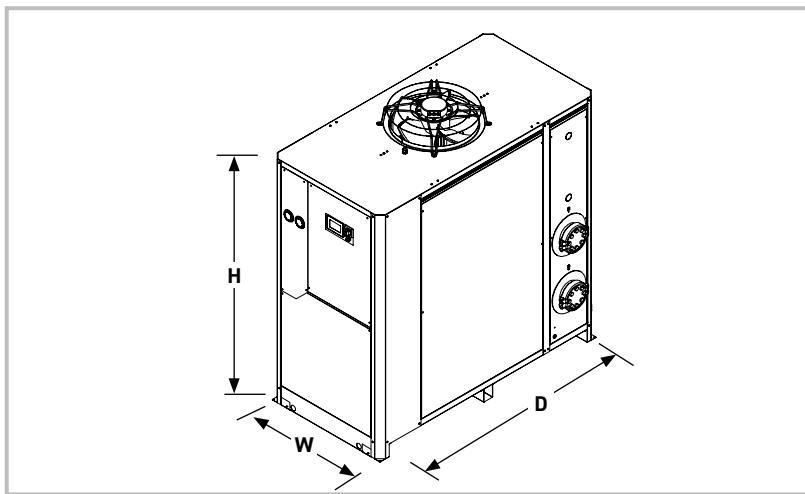

Weights & Dimensions

Model	Dimensions						Weight		Dryer Inlet	Dryer Outlet		
	Height (H)		Width (W)		Depth (D)							
	mm	ins	mm	ins	mm	ins	kg	lbs				
PSE 120	1365	53.7	703	27.7	1150	45.3	205	452	AOPX040H	AAPX040H		
PSE 140	1365	53.7	703	27.7	1150	45.3	205	452	AOPX040H	AAPX040H		
PSE 180	1365	53.7	703	27.7	1150	45.3	210	463	AOPX045I	AAPX045I		
PSE 220	1410	55.5	703	27.7	1151	45.3	260	573	AOPX050I	AAPX050I		
PSE 260	1410	55.5	703	27.7	1151	45.3	262	578	AOPX055I	AAPX055I		
PSE 300	1410	55.5	703	27.7	1151	45.3	264	582	AOPX055I	AAPX055I		
PSE 350	1410	55.5	703	27.7	1151	45.3	270	595	AOPX055I	AAPX055I		
PSE 460	2055	80.9	973	38.3	1287	50.7	380	838	AO070O	AO070O		
PSE 520	2055	80.9	973	38.3	1287	50.7	380	838	AO070O	AA070O		
PSE 630	2055	80.9	973	38.3	1287	50.7	420	926	AO070O	AA070O		
PSE 750	2055	80.9	1205	47.4	1974	77.7	730	1609	AO075P	AA075P		
PSE 900	2055	80.9	1205	47.4	1974	77.7	770	1698	AO075P	AA075P		
PSE 1200	2055	80.9	1205	47.4	1974	77.7	850	1874	AO080P	AA080P		
PSE 1500	2040	80.3	1517	59.7	2529	99.6	1070	2359	AO085Q	AA085Q		
PSE 1800	2040	80.3	1517	59.7	2529	99.6	1210	2668	AO085Q	AA085Q		

Parker Catalogue Numbers

Model	Catalogue Number Air Cooled	Catalogue Number Water Cooled
PSE 120	PSE120-A4X03DF14EI	-
PSE 140	PSE140-A4X03DF14EI	-
PSE 180	PSE180-A4X03DF14EI	-
PSE 220	PSE220-A4X03DF14EITS	PSE220-S4X03DF14EITS
PSE 260	PSE260-A4X03DF14EITS	PSE260-S4X03DF14EITS
PSE 300	PSE300-A4X03DF14EITS	PSE300-S4X03DF14EITS
PSE 350	PSE350-A4X03DF14EITS	PSE350-S4X03DF14EITS
PSE 460	PSE460-A4X03DF14EITS	PSE460-S4X03DF14EITS
PSE 520	PSE520-A4X03DF14EITS	PSE520-S4X03DF14EITS
PSE 630	PSE630-A4X03DF14EITS	PSE630-S4X03DF14EITS
PSE 750	PSE750-A4X03DF14EITS	PSE750-S4X03DF14EITS
PSE 900	PSE900-A4X03DF14EITS	PSE900-S4X03DF14EITS
PSE 1200	PSE1200-A4X03DF14EITS	PSE1200-S4X03DF14EITS
PSE 1500	PSE1500-A4X03DF14EITS	PSE1500-S4X03DF14EITS
PSE 1800	PSE1800-A4X03DF14EITS	PSE1800-S4X03DF14EITS

GH - 350 Bar Compressed Air Filters

Filtration Performance

Filtration Grade	Filter Type	Particle Reduction (inc water & oil aerosols)	Max Remaining Oil Content at 21°C (70°F)	Filtration Efficiency	Initial Dry Differential Pressure	Initial Saturated Differential Pressure	Change Element Every	Precede with Filtration Grade
V	Dry Particulate	Down to 3 micron	N/A	>90%	<300 mbar (<4.35 psi)	<350 mbar (<5 psi)	12 months or 6000 hours	N/A
ZP	Coalescing & Dry Particulate	Down to 1 micron	0.5 mg/m³ 0.5 ppm(w)	99.925%	<300 mbar (<4.35 psi)	<370 mbar (<5.4 psi)	12 months or 6000 hours	N/A
XP	Coalescing & Dry Particulate	Down to 0.01 micron	0.01 mg/m³ 0.01 ppm(w)	99.9999%	<300 mbar (<4.35 psi)	<400 mbar (<5.8 psi)	12 months or 6000 hours	ZP
A	Oil Vapour Reduction	N/A	0.003 mg/m³ 0.003 ppm(w)	N/A	<300 mbar (<4.35 psi)	N/A	When oil vapour is detected	ZP+XP

Important Note:

Using the same filter housings as their coalescing and dry particulate counterparts, Grade A filter elements differ in that they utilise a bed of activated carbon to adsorb oil vapour. It is important to note, in-line adsorption filter elements have a different life span compared to coalescing and dry particulate filters and require more frequent element changes.

Technical Data

Filtration Grade	Filter Models	Minimum Operating Pressure		Maximum Operating Pressure		Minimum Operating Temperature		Maximum Operating Temperature	
		bar g	psi g	bar g	psi g	°C	°F	°C	°F
V/ZP/XP	GH3/350 - GH13/350	50	725	350	5076	2	35	80	176
A	GH3/350 - GH13/350	50	725	350	5076	2	35	50	122

Flow Rates

Filter Coding Example

Model	Pipe Size	L/S	m³/min	m³/hr	cfm	Replacement Element	No.	Grade	Model
GH3/350	Grade	½"	101	6.1	365	215	1050	Grade	1
GH5/350	Grade	½"	139	8.4	501	295	1070	Grade	1
GH7/350	Grade	½"	215	12.9	776	457	1140	Grade	1
GH9/350	Grade	½"	287	17.3	1035	609	2010	Grade	1
GH11/350	Grade	1"	514	30.9	1852	1090	2020	Grade	1
GH12/350	Grade	1½"	782	46.9	2816	1657	2030	Grade	1
GH13/350	Grade	1½"	1184	71.0	4261	2508	2050	Grade	1

Stated flows are for operation at 7 bar (g) (102 psi g) with reference to 20°C, 1 bar (a), 0% relative water vapour pressure. For flows at other pressures, apply the correction factors shown below.


Product Selection & Correction Factors

To correctly select a filter model, the flow rate of the filter must be adjusted for the minimum operating (inlet) pressure at the point of installation.

- Obtain the minimum operating (inlet) pressure and maximum compressed air flow rate at the inlet of the filter.
- Select the correction factor for minimum inlet pressure from the CFMIP table (always round down e.g. for 155 bar, use 150 bar correction factor)
- Calculate the minimum filtration capacity. Minimum Filtration Capacity = Compressed Air Flow Rate x CFMIP
- Using the minimum filtration capacity, select a filter model from the flow rate tables above (filter selected must have a flow rate equal to or greater than the minimum filtration capacity).

CFMIP - Correction Factor Minimum Inlet Pressure

Minimum Inlet Pressure	bar g	50	60	70	80	90	100	125	150	175	200	225	250	275	300	325	350
	psi g	725	870	1015	1160	1305	1450	1813	2175	2538	2901	3263	3626	3989	4351	4714	5076
Correction Factor		2.65	2.42	2.24	2.09	1.97	1.87	1.67	1.53	1.41	1.32	1.25	1.18	1.13	1.08	1.04	1.00

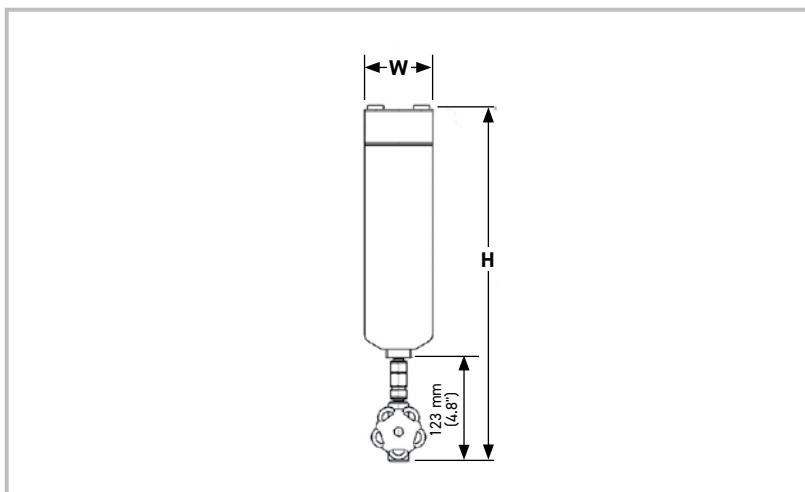

Weights & Dimensions

Model	Height (H)		Width (W)		Depth (D)		Weight	
	mm	ins	mm	ins	mm	ins	kg	lbs
GH3/350	355	14.0	80	3.1	80	3.1	2.8	6.2
GH5/350	355	14.0	80	3.1	80	3.1	2.8	6.2
GH7/350	420	16.5	80	3.1	80	3.1	3.4	7.5
GH9/350	455	17.9	116	4.6	116	4.6	18.2	40.1
GH11/350	540	21.3	116	4.6	116	4.6	21.9	48.3
GH12/350	655	25.8	125	4.9	125	4.9	28.3	62.4
GH13/350	910	35.8	125	4.9	125	4.9	39.2	86.4

Parker Catalogue Numbers

Model	Catalogue Number 3 Micron Pre-Filters	Catalogue Number General Purpose Filters	Catalogue Number High Efficiency Filters	Catalogue Number Oil Vapour Reduction Filters
GH3/350	GH3/350V	GH3/350ZP	GH3/350XP	GH3/350A
GH5/350	GH5/350V	GH5/350ZP	GH5/350XP	GH5/350A
GH7/350	GH7/350V	GH7/350ZP	GH7/350XP	GH7/350A
GH9/350	GH9/350V	GH9/350ZP	GH9/350XP	GH9/350A
GH11/350	GH11/350V	GH11/350ZP	GH11/350XP	GH11/350A
GH12/350	GH12/350V	GH12/350ZP	GH12/350XP	GH12/350A
GH13/350	GH13/350V	GH13/350ZP	GH13/350XP	GH13/350A

HDK-MT - 350 Bar Compressed Air Dryers

Dryer Performance

Dryer Models	Dewpoint (Standard)		ISO8573-1:2010 Classification (Standard)		Dewpoint (Option 1)		ISO8573-1:2010 Classification (Option 1)	
	°C	°F			°C	°F		
HDK-MT 15 - 70	-40	-40		Class 2.2.2	-20	-4		Class 2.3.2

Technical Data

Dryer Models	Minimum Operating Pressure		Maximum Operating Pressure		Minimum Operating Temperature		Maximum Operating Temperature		Maximum Ambient Temperature		Electrical Supply (Standard)	Electrical Supply (Optional)	Thread Type	Noise Level
	bar g	psi g	bar g	psi g	°C	°F	°C	°F	°C	°F				
HDK-MT 15 - 70	100	1450	350	5076	5	41	55	131	50	122	230V 1ph 50/60Hz	115V 1ph 50/60Hz	BSPP	95-115

Flow Rates

Model	Pipe Size BSPP	Inlet Flow Rate			
		L/s	m³/min	m³/hr	cfm
HDK-MT 15/350	G½	56	3.3	200	118
HDK-MT 20/350	G½	83	5.0	300	177
HDK-MT 25/350	G½	111	6.7	400	235
HDK-MT 30/350	G½	139	8.4	500	294
HDK-MT 40/350	G¾	217	13	780	459
HDK-MT 50/350	G¾	261	16	940	553
HDK-MT 70/350	G¾	328	20	1180	695

Stated flows are for operation at 7 bar (g) (102 psi g) with reference to 20°C, 1 bar (a), 0% relative water vapour pressure. For flows at other pressures, apply the correction factors shown below.

Product Selection & Correction Factors

For correct operation, compressed air dryers must be sized using for the maximum (summer) inlet temperature, maximum (summer) ambient temperature, minimum inlet pressure, required outlet dewpoint and maximum flow rate of the installation.

To select a dryer, first calculate the MDC (Minimum Drying Capacity) using the formula below then select a dryer from the flow rate table above with a flow rate equal to or above the MDC.

$$\text{Minimum Drying Capacity} = \text{System Flow} \times \text{CFIT} \times \text{CFAT} \times \text{CFMIP} \times \text{CFOD}$$

CFMIT - Correction Factor Maximum Inlet Temperature

Maximum Inlet Temperature	°C	30	35	40	45	50	55
	°F	86	95	104	113	122	131
Correction Factor		1.00	1.00	1.32	1.68	2.15	2.8

CFMAT - Correction Factor Maximum Ambient Temperature


Maximum Ambient Temperature	°C	25	30	35	40	45	50
	°F	77	86	95	104	113	122
Correction Factor		1.00	1.00	1.00	1.00	1.00	1.00

CFMIP - Correction Factor Minimum Inlet Pressure

Minimum Inlet Pressure	bar g	100	150	200	250	300	350
	psi g	1450	2175	2900	3625	4351	5076
Correction Factor		3.57	2.33	1.75	1.41	1.16	1.00

CFOD - Correction Factor Outlet Dewpoint

Outlet Dewpoint	°C	-20	-40	-70
	°F	-4	-40	-100
Correction Factor		1.00	1.00	N/A

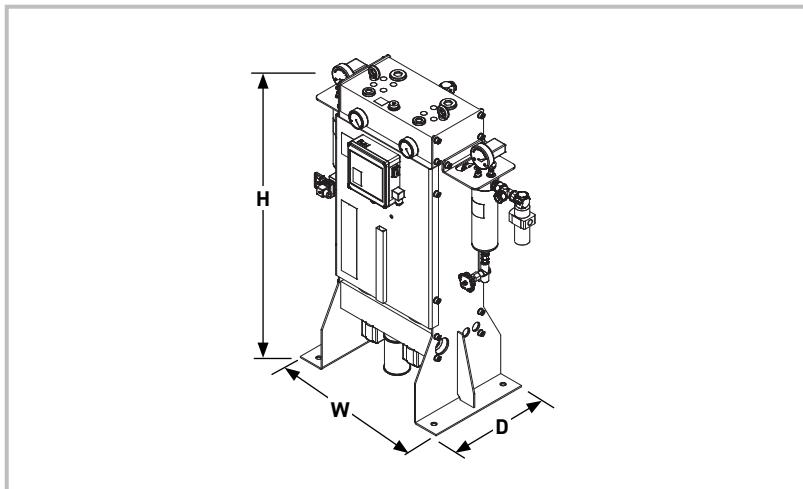

Weights & Dimensions

Model	Pipe Size BSPP	Dimensions						Weight	
		Height (H)		Width (W)		Depth (D)			
		mm	ins	mm	ins	mm	ins	kg	lbs
HDK-MT 15/350	G $\frac{1}{2}$	1050	41.3	700	27.6	370	14.6	190	86
HDK-MT 20/350	G $\frac{1}{2}$	1250	49.2	700	27.6	370	14.6	220	100
HDK-MT 25/350	G $\frac{1}{2}$	1450	57.1	700	27.6	370	14.6	250	114
HDK-MT 30/350	G $\frac{1}{2}$	1650	65.0	700	27.6	370	14.6	280	127
HDK-MT 40/350	G $\frac{3}{4}$	1650	65.0	770	30.3	370	14.6	310	141
HDK-MT 50/350	G $\frac{3}{4}$	1850	72.8	770	30.3	450	17.7	340	155
HDK-MT 70/350	G $\frac{3}{4}$	2075	81.7	770	30.3	450	17.7	380	173

Required Filtration

Model	Pipe Size BSPP or NPT	Dryer Inlet	
		General Purpose Pre-filter	
HDK-MT 15/350	G $\frac{1}{2}$	GH7/350ZP	
HDK-MT 20/350	G $\frac{1}{2}$	GH7/350ZP	
HDK-MT 25/350	G $\frac{1}{2}$	GH7/350ZP	
HDK-MT 30/350	G $\frac{1}{2}$	GH7/350ZP	
HDK-MT 40/350	G $\frac{3}{4}$	GH9/350ZP	
HDK-MT 50/350	G $\frac{3}{4}$	GH9/350ZP	
HDK-MT 70/350	G $\frac{3}{4}$	GH9/350ZP	

Included Filtration

Dryer Inlet	Dryer Outlet			
	High Efficiency Filter	Oil Vapour Reduction Filter	General Purpose Dry Particulate Filter	High Efficiency Dry Particulate Filter
GH7/350XP	-	GH7/350ZP/VV	-	-
GH7/350XP	-	GH7/350ZP/VV	-	-
GH7/350XP	-	GH7/350ZP/VV	-	-
GH7/350XP	-	GH7/350ZP/VV	-	-
GH9/350XP	-	GH9/350ZP/VV	-	-
GH9/350XP	-	GH9/350ZP/VV	-	-
GH9/350XP	-	GH9/350ZP/VV	-	-

BAC-4015 Breathable Compressed Air Purifier

Performance

Model	Dewpoint (Standard)		ISO8573-1:2010 Classification (Standard)	
	°C	°F		
BAC-4015	-40	-40	Class 1.2.1	

Technical Data

Model	Minimum Operating Pressure		Maximum Operating Pressure		Minimum Operating Temperature		Maximum Operating Temperature		Maximum Ambient Temperature		Electrical Supply (Standard)	Thread Type	Noise Level
	bar g	psi g	bar g	psi g	°C	°F	°C	°F	°C	°F			
BAC-4015	4	58	8.5	123	5	41	30	86	55	131	Fully Pneumatic	BSPP	<75

Flow Rates

Model	Pipe Size		Inlet Flow Rate				Regeneration Air Requirement			
	Inlet	Outlet	L/s	m³/min	m³/hr	cfm	L/s	m³/min	m³/hr	cfm
BAC-4015	G½	G¼	11	0.68	41	24	2.36	0.14	8.5	5

Stated flows are for operation at 7 bar (g) (102 psi g) with reference to 20°C, 1 bar (a), 0% relative water vapour pressure.

For flows at other conditions, apply the correction factors shown below.

Product Selection & Correction Factors

For correct operation, breathing air purifiers must be sized using for the maximum (summer) inlet temperature, minimum inlet pressure, and maximum flow rate of the installation.

To select a breathing air purifier, first calculate the MPC (Minimum Purification Capacity) using the formula below then select a breathing air purifier from the flow rate table above with a flow rate equal to or above the MPC.


$$\text{Minimum Purification Capacity} = \text{System Flow} \times \text{CFMIT} \times \text{CFMIP}$$

CFMIT - Correction Factor Maximum Inlet Temperature

Maximum Inlet Temperature	°C	25	30
	°F	77	86
Correction Factor		1.00	1.20

CFMIP - Correction Factor Minimum Inlet Pressure

Minimum Inlet Pressure	bar g	4	5	6	7	8	8.5
	psi g	58	73	87	100	116	123
Correction Factor		1.60	1.33	1.14	1.00	0.89	0.84

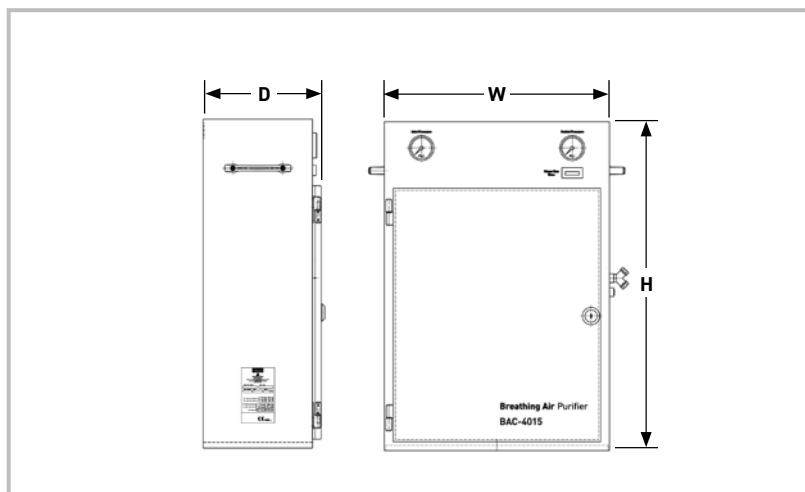

Weights & Dimensions

Model	Pipe Size BSPP		Dimensions						Weight	
			Height (H)		Width (W)		Depth (D)			
	Inlet	Outlet	mm	ins	mm	ins	mm	ins	kg	lbs
BAC-4015	G1/2	G1/4	752	29.6	515	20.3	272	10.7	40	88.2

Included Filtration

Model	Dryer Inlet			Dryer Outlet		
	General Purpose Pre-filter	High Efficiency Filter	Oil Vapour Reduction Filter	General Purpose Dry Particulate Filter	High Efficiency Dry Particulate Filter	
BAC-4015		•	•			•
Filtration Performance	General Purpose Pre-filter	High Efficiency Filter	Oil Vapour Reduction Filter	General Purpose Dry Particulate Filter	High Efficiency Dry Particulate Filter	
Filtration Grade	-	Grade AA	AC	-	Grade AA	
Filtration Type	-	Coalescing	Adsorption	-	Coalescing	
Particle Reduction (inc water & oil aerosols)	-	Down to 0.01 micron	N/A	-	Down to 0.01 micron	
Maximum Remaining Oil Aerosol Content at 21°C	-	≤0.01 mg/m³ (≤0.01 ppm(w))	N/A	-	N/A	
Maximum Remaining Oil Vapour Content at System Temperature	-	N/A	≤0.003 mg/m³ (≤0.003 ppm(w))	-	N/A	
Filtration Efficiency	-	99.9999%	N/A	-	99.9999%	

Parker Catalogue Numbers

Model	Catalogue Number
BAC-4015	BAC-4015

BSP-MT 1-4 Breathable Compressed Air Purifier

Performance

Models	Dewpoint (Standard)		ISO8573-1:2010 Classification (Standard)				
	°C	°F					
BSP-MT 1-4	-40	-40	Class 2.2.1				

Technical Data

Models	Minimum Operating Pressure		Maximum Operating Pressure		Minimum Operating Temperature		Maximum Operating Temperature		Maximum Ambient Temperature		Electrical Supply (Standard)	Electrical Supply (Option)	Electrical Supply (Option)	Thread Type	Noise Level
	bar g	psi g	bar g	psi g	°C	°F	°C	°F	°C	°F					dB(A)
BSP-MT 1-4	4	58	16	232	5	41	50	122	50	122	230V / 1ph / 50~60Hz	115V / 1ph / 50~60Hz	24V DC	BSPP	<75

Flow Rates

Model	Pipe Size	Flow Rate						
		L/s		m³/min		m³/hr		cfm
BSP-MT 1	G1/4	4		0.22		13		8
BSP-MT 2	G1/4	7		0.40		24		14
BSP-MT 3	G1/4	11		0.67		40		24
BSP-MT 4	G1/4	16		0.94		56		33

Stated flows are for operation at 13 bar (g) (189 psi g), 35°C (95°F) with reference to 20°C, 1 bar (a), 0% relative water vapour pressure.

For flows at other conditions, apply the correction factors shown below.

Product Selection & Correction Factors

For correct operation, compressed air dryers must be sized using for the maximum (summer) inlet temperature, maximum (summer) ambient temperature, minimum inlet pressure, required outlet dewpoint and maximum flow rate of the installation.

To select a dryer, first calculate the MDC (Minimum Drying Capacity) using the formula below then select a dryer from the flow rate table above with a flow rate equal to or above the MDC.

$$\text{Minimum Drying Capacity} = \text{System Flow} \times \text{CFIT} \times \text{CFAT} \times \text{CFMIP}$$

CFIT - Correction Factor Maximum Inlet Temperature


Maximum Inlet Temperature	°C	25	30	35	40	45	50
	°F	77	86	95	104	113	122
Correction Factor		0.95	0.97	1.00	1.20	1.30	1.35

CFAT - Correction Factor Maximum Ambient Temperature

Maximum Ambient Temperature	°C	25	30	35	40	45	50
	°F	77	86	95	104	113	122
Correction Factor		1.00	1.00	1.00	1.00	1.00	1.00

CFMIP - Correction Factor Minimum Inlet Pressure

Minimum Inlet Pressure	bar g	4	5	6	7	8	9	10	11	12	13	14	15	16
	psi g	58	73	87	100	116	131	145	160	174	189	203	218	232
Correction Factor		2.60	2.24	1.93	1.68	1.46	1.37	1.32	1.29	1.18	1.00	0.95	0.82	0.77

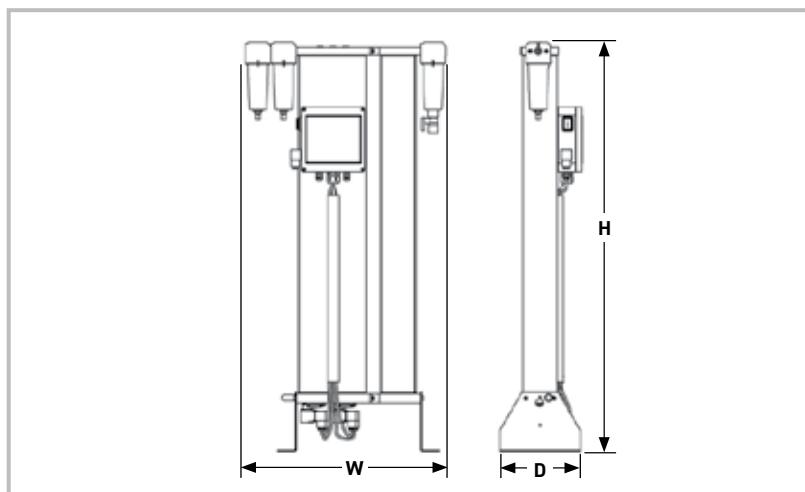

Weights & Dimensions

Model	Pipe Size	Dimensions						Weight	
		Height (H)		Width (W)		Depth (D)			
		mm	ins	mm	ins	mm	ins	kg	lbs
BSP-MT 1	G1/4	403	16	575	22.68	216	8.5	16.5	36.4
BSP-MT 2	G1/4	578	23	575	22.6	216	8.5	21.5	47.4
BSP-MT 3	G1/4	828	33	575	22.6	216	8.5	29.0	63.9
BSP-MT 4	G1/4	1078	42	575	22.6	216	8.5	36.0	79.4

Included Filtration

Models	Dryer Inlet		Dryer Outlet
	General Purpose Pre-filter	High Efficiency Filter	General Purpose Dry Particulate Filter
BSP-MT 1-4	•	•	•
Filtration Performance	General Purpose Pre-filter	High Efficiency Filter	General Purpose Dry Particulate Filter
Filtration Grade	AO	AA	AO
Filtration Type	Coalescing	Coalescing	Dry Particulate
Particle Reduction (inc water & oil aerosols)	Down to 1 micron	Down to 0.01 micron	Down to 1 micron
Maximum Remaining Oil Aerosol Content at 21°C	≤0.5 mg/m³ (≤0.5 ppm(w))	≤0.01 mg/m³ (≤0.01 ppm(w))	N/A
Maximum Remaining Oil Vapour Content at System Temperature	N/A	N/A	N/A
Filtration Efficiency	99.925%	99.9999%	99.925%

Parker Catalogue Numbers

Model	Catalogue Number	
	No Dewpoint Control	With Dewpoint Control
BSP-MT1	K1/16BP3-G230M	K1/16BP3-G230MT
BSP-MT2	K2/16BP3-G230M	K2/16BP3-G230MT
BSP-MT3	K3/16BP3-G230M	K3/16BP3-G230MT
BSP-MT4	K4/16BP3-G230M	K4/16BP3-G230MT

BAS 050 - 085 Breathable Compressed Air Purifier

Breathing Air Purifier Performance

Dryer Models	Dewpoint (Standard)		ISO8573-1:2010 Classification (Standard)	
	°C	°F		
BAS HL	-40	-40	Class 1.2.0	

Technical Data

Dryer Models	Minimum Operating Pressure		Maximum Operating Pressure		Minimum Operating Temperature		Maximum Operating Temperature		Maximum Ambient Temperature		Electrical Supply (Standard)	Electrical Supply (Optional)	Thread Type	Noise Level
	bar g	psi g	bar g	psi g	°C	°F	°C	°F	°C	°F				
BAS HL 050 - 085	4	58	16	232	5	41	35	95	55	131	85 - 265V 1ph 50/60Hz	24V DC	BSPP or NPT	<75

Flow Rates

Model	Pipe Size BSPP or NPT	Inlet Flow Rate			
		L/s	m³/min	m³/hr	cfm
BAS HL 050	½"	15	0.92	55	32
BAS HL 055	½"	19	1.17	70	41
BAS HL 060	½"	25	1.50	90	53
BAS HL 065	½"	31	1.84	110	65
BAS HL 070	¾"	42	2.51	150	88
BAS HL 075	1"	51	3.09	185	109
BAS HL 080	1"	61	3.67	220	129
BAS HL 085	1½"	83	5.01	300	177

Stated flows are for operation at 7 bar (g) (102 psi g) with reference to 20°C, 1 bar (a), 0% relative water vapour pressure. For flows at other pressures, apply the correction factors shown below.

Product Selection & Correction Factors

For correct operation, compressed air dryers must be sized using for the maximum (summer) inlet temperature, maximum (summer) ambient temperature, minimum inlet pressure, required outlet dewpoint and maximum flow rate of the installation.

To select a dryer, first calculate the MTC (Minimum Treatment Capacity) using the formula below then select a dryer from the flow rate table above with a flow rate equal to or above the MTC.

$$\text{Minimum Treatment Capacity} = \text{System Flow} \times \text{CFIT} \times \text{CFAT} \times \text{CFMIP} \times \text{CFOD}$$

CFIT - Correction Factor Maximum Inlet Temperature

Maximum Inlet Temperature	°C	25	30	35
	°F	77	86	95
Correction Factor		1.00	1.00	1.00

CFAT - Correction Factor Maximum Ambient Temperature


Maximum Ambient Temperature	°C	25	30	35	40	45	50
	°F	77	86	95	104	113	122
Correction Factor		1.00	1.00	1.00	1.00	1.00	1.00

CFMIP - Correction Factor Minimum Inlet Pressure

Minimum Inlet Pressure	bar g	4	5	6	7	8	9	10	11	12	13	14	15	16
	psi g	58	73	87	100	116	131	145	160	174	189	203	218	232
Correction Factor		1.60	1.33	1.14	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

CFOD - Correction Factor Dewpoint

Maximum Inlet Temperature	°C	-40
	°F	-40
Correction Factor		1.00

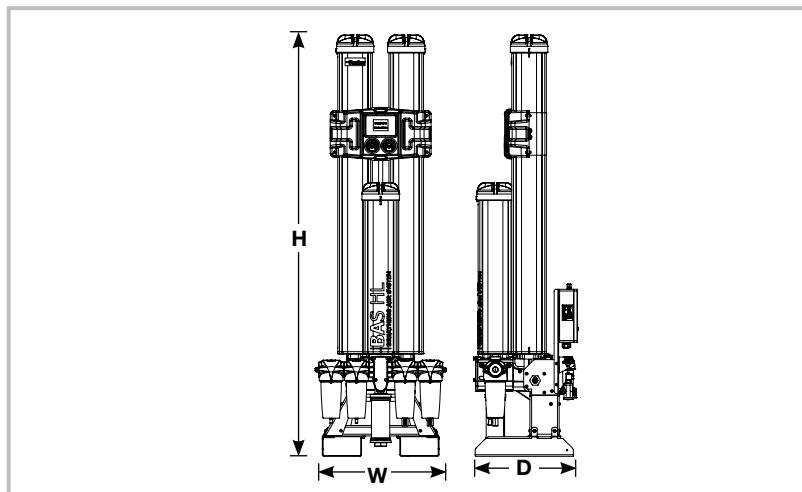

Weights & Dimensions

Model	Pipe Size BSPP or NPT	Dimensions						Weight	
		Height (H)		Width (W)		Depth (D)			
		mm	ins	mm	ins	mm	ins	kg	lbs
BAS HL 050	1/2"	1133	45	559	22	512	20.2	92	203
BAS HL 055	1/2"	1313	52	559	22	512	20.2	99	218
BAS HL 060	1/2"	1510	59	559	22	496	19.5	109	240
BAS HL 065	1/2"	1660	65	559	22	496	19.5	115	254
BAS HL 070	3/4"	2020	80	630	24.8	496	19.5	138	304
BAS HL 075	1"	1595	63	630	24.8	682	27	196	432
BAS HL 080	1"	1745	69	630	24.8	682	27	220	485
BAS HL 085	1 1/2"	2105	83	630	24.8	682	27	255	562

Included Filtration

Model	Dryer Inlet			Dryer Outlet		
	General Purpose Pre-filter		High Efficiency Filter	Oil Vapour Reduction Filter & Catalyst Stage	General Purpose Dry Particulate Filter	High Efficiency Dry Particulate Filter
	•	•	•	•	•	•
BAS HL 050 - BAS HL 085	•	•	•	•	•	•
Filtration Performance	General Purpose Coalescing Filter	High Efficiency Coalescing Filter	Oil Vapour Reduction Filter	General Purpose Dry Particulate Filter	High Efficiency Dry Particulate Filter	
Filtration Grade	Grade AO	Grade AA	OVR	Grade AO	Grade AA	
Filtration Type	Coalescing	Coalescing	Adsorption	Dry Particulate	Coalescing	
Particle Reduction (inc water & oil aerosols)	Down to 1 micron	Down to 0.01 micron	N/A	Down to 1 micron	Down to 0.01 micron	
Maximum Remaining Oil Aerosol Content at 21°C	≤0.5 mg/m³ (≤0.5 ppm(w))	≤0.01 mg/m³ (≤0.01 ppm(w))	N/A	N/A	N/A	
Maximum Remaining Oil Vapour Content at System Temperature	N/A	N/A	≤0.003 mg/m³ (≤0.003 ppm(w))	N/A	N/A	
Filtration Efficiency	99.925%	99.9999%	N/A	99.925%	99.9999%	

Parker Catalogue Numbers

Model	Catalogue Number	
	BSP	NPT
BAS HL 050	BASHL050-40G16AE	BASHL050-40N16AE
BAS HL 055	BASHL055-40G16AE	BASHL055-40N16AE
BAS HL 060	BASHL060-40G16AE	BASHL060-40N16AE
BAS HL 065	BASHL065-40G16AE	BASHL065-40N16AE
BAS HL 070	BASHL070-40G16AE	BASHL070-40N16AE
BAS HL 075	BASHL075-40G16AE	BASHL075-40N16AE
BAS HL 080	BASHL080-40G16AE	BASHL080-40N16AE
BAS HL 085	BASHL085-40G16AE	BASHL085-40N16AE

BAM 10-70 Breathable Compressed Air Purifier

Dryer Performance

Models	Dewpoint (Standard)		ISO8573-1:2010 Classification (Standard)			
	°C	°F	Class 1.2.1			
BAM	-40	-40				

Technical Data

Models	Minimum Operating Pressure		Maximum Operating Pressure		Minimum Operating Temperature		Maximum Operating Temperature		Maximum Ambient Temperature		Electrical Supply (Standard)	Thread Type	Noise Level
	bar g	psi g	bar g	psi g	°C	°F	°C	°F	°C	°F			
BAM10 - BAM70	4	58	13	190	5	41	35	95	55	131	85 - 265V 1ph 50/60Hz	BSPP or NPT	<75

Flow Rates

Model	Pipe Size	Inlet Flow Rate				Regeneration Air Requirement			
		L/s	m³/min	m³/hr	cfm	L/s	m³/min	m³/hr	cfm
BAM10	G2	113	6.81	408	240	22.6	1.36	82	48
BAM20	G2	170	10.22	612	360	34.0	2.04	122	72
BAM30	G2	213	12.78	795	450	42.6	2.60	159	90
BAM40	G2	283	17	1020	600	56.6	3.40	204	120
BAM50	G2½	354	21	1275	750	70.8	4.20	255	150
BAM70	G2½	496	30	1785	1050	99.2	6.00	357	210

Stated flows are for operation at 7 bar (g) (102 psi g) with reference to 20°C, 1 bar (a), 0% relative water vapour pressure.

For flows at other conditions, apply the correction factors shown below.

Product Selection & Correction Factors

For correct operation, breathing air purifiers must be sized using for the maximum (summer) inlet temperature, minimum inlet pressure and maximum flow rate of the installation.

To select a breathing air purifier, first calculate the MPC (Minimum Purification Capacity) using the formula below then select a breathing air purifier from the flow rate table above with a flow rate equal to or above the MPC.


$$\text{Minimum Purification Capacity} = \text{System Flow} \times \text{CFMIT} \times \text{CFMIP}$$

CFIT - Correction Factor Maximum Inlet Temperature

Maximum Inlet Temperature	°C	25	30	35
	°F	77	86	95
Correction Factor		1.00	1.20	1.00

CFMIP - Correction Factor Minimum Inlet Pressure

Minimum Inlet Pressure	bar g	4	5	6	7	8	9	10	11	12	13
	psi g	58	73	87	100	116	131	145	160	174	189
Correction Factor		1.60	1.33	1.14	1.00	0.89	0.80	0.73	0.67	0.62	0.57

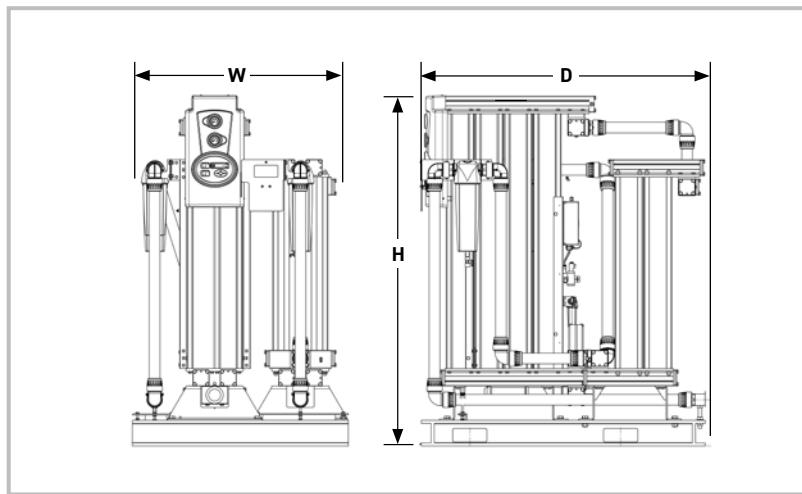

Weights & Dimensions

Model	Pipe Size BSPP	Dimensions						Weight	
		Height (H)		Width (W)		Depth (D)			
		mm	ins	mm	ins	mm	ins	kg	lbs
BAM10	G2	1797	70.7	1260	49.6	1655	65.2	600	1322
BAM20	G2	1797	70.7	1260	49.6	1655	65.2	700	1543
BAM30	G2	2042	80.4	1260	49.6	1655	65.2	800	1763
BAM40	G2½	2042	80.4	1260	49.6	1655	65.2	900	1984
BAM50	G2½	2042	80.4	1260	49.6	1950	76.8	1100	2425
BAM70	G2½	2042	80.4	1260	49.6	1950	76.8	1400	3086

Included Filtration

Models	Pipe Size BSPP or NPT	Dryer Inlet		Dryer Outlet			
		General Purpose Pre-filter	High Efficiency Filter	Oil Vapour Reduction Filter	General Purpose Dry Particulate Filter	High Efficiency Dry Particulate Filter	
BAM10 - BAM70	G2	•	•	•	•	•	•
Filtration Performance	General Purpose Pre-filter	High Efficiency Filter	Oil Vapour Reduction Filter	General Purpose Dry Particulate Filter	High Efficiency Dry Particulate Filter		
Filtration Grade	Grade AO	Grade AA	OVR	Grade AO	Grade AA		
Filtration Type	Coalescing	Coalescing	Adsorption	Dry Particulate	Coalescing		
Particle Reduction (inc water & oil aerosols)	Down to 1 micron	Down to 0.01 micron	N/A	Down to 1 micron	Down to 0.01 micron		
Maximum Remaining Oil Aerosol Content at 21°C	≤0.5 mg/m³ (≤0.5 ppm(w))	≤0.01 mg/m³ (≤0.01 ppm(w))	N/A	N/A	N/A		
Maximum Remaining Oil Vapour Content at System Temperature	N/A	N/A	≤0.003 mg/m³ (≤0.003 ppm(w))	N/A	N/A		
Filtration Efficiency	99.925%	99.9999%	N/A	99.925%	99.9999%		

Parker Catalogue Numbers

Model	Catalogue Number
BAM10	BAM10
BAM20	BAM20
BAM30	BAM30
BAM40	BAM40
BAM50	BAM50
BAM60	BAM60
BAM70	BAM70

ES2000 Series Oil / Water Separators

Product Selection

Correct selection is critical for the operation of oil/water separators. Increased condensate flow through an oil/water separator reduces settlement time in the main tank, increases oil carryover to the carbon stage & reduces contact time with the carbon. The overall effect of incorrect sizing is poor outlet water quality, reduced carbon filter life and the potential for overflowing.

Capacities shown in this catalogue assume installation in two of the world's major climatic conditions. Should the oil/water separator be installed in conditions other than those shown, please contact your local Parker outlet or approved distributor/agent for correct sizing.

Oil Types

To simplify the selection, lubricant classifications have been split into three bands depending upon their ability to separate within a static type oil/water separator.

Band A: Turbine Oil, Additive Free Oil

Band B: Mineral

Poly alpha olefins (PAO)

Trimethylolpropane Ester (TMP),

Pentaerythrityl Ester (PE)

Band C: Diesters, Triesters,

Polyoxyalkylene glycol (PAG)

Inseparable using static Separation

Techniques: Automatic transmission fluid (ATF)

Drain Types

The condensate should be removed from the compressed air system using a drainage method that does not cause emulsification of the condensate and is appropriate for the unit. Usual methods include :

- **Level Operated Electronic Drain**
- **Float Drain**
- **Timed Solenoid Drain***

Parker recommends the use of the ED3000 Series range of condensate drains. Manual and Thermodynamic Disc trap drains must not be used with the ES2000 Series oil/water separators.

*If the use of timed solenoid drains is unavoidable, steps must be taken to reduce the air loss as this has an emulsifying effect on the condensate.

Refrigeration Dryers

A refrigeration dryer installed in a compressed air system can significantly increase the condensate produced. The oil/water separator must be sized appropriately to treat the extra condensate produced. Flow capacities within this literature are shown both with and without a refrigeration dryer installed.

Important Note:

Additives blended into the lubricants to prevent bacterial growth, rusting, corrosion, and to promote emulsification, such as detergents etc., can have an impact on the separating process. Static oil/water separators are unable to separate stable emulsions or oils that are miscible in water. Additionally, these units will not totally separate lubricants containing: Emulsifying Agents; Glycol additives; or Polyglycol based coolants.

Climate Condition 1 - Outlet quality: <20mg/l oil in water

System Conditions

Ambient Temperature at Compressor Inlet: 25°C (77°F) Refrigeration Dryer Dewpoint If Fitted: 3°C
 Relative Humidity: 65% Minimum System Temperature If Refrigeration Dryer Is Not Fitted: 30°C (86°F)
 Compressor Discharge Temperature: 35°C (95°F) System Pressure: 7 bar g (102 psi g) Outlet quality: <20mg/l oil in water

No Refrigeration Dryer Installed in System		Oil Type											
		Band A Turbine, Additive Free				Band B Mineral, PAO, TMP, PE				Band C Diesters, Triesters, PAG			
Compressor Type	Model	L/s	m³/min	m³/hr	cfm	L/s	m³/min	m³/hr	cfm	L/s	m³/min	m³/hr	cfm
Rotary Screw, Vane	ES2100	36.9	2.2	133	78	30.8	1.9	111	66	25.6	1.5	92	54
	ES2150	58.6	3.5	211	124	50.0	3	180	106	40.6	2.4	146	86
	ES2200	90.3	5.4	325	191	76.7	4.6	276	163	62.5	3.7	225	132
	ES2300	126.7	7.6	456	268	106.4	6.4	383	225	87.5	5.3	315	185
	ES2400	253.4	15.2	912	537	212.8	12.8	766	451	175.0	10.5	630	371
	ES2500	501.4	30.1	1805	1062	425.0	25.5	1530	900	346.4	20.8	1247	734
	ES2600	997.6	59.9	3591	2114	849.2	51	3057	1800	689.5	41.4	2482	1461
Refrigeration Dryer Installed in System		Oil Type											
		Band A Turbine, Additive Free				Band B Mineral, PAO, TMP, PE				Band C Diesters, Triesters, PAG			
Compressor Type	Model	L/s	m³/min	m³/hr	cfm	L/s	m³/min	m³/hr	cfm	L/s	m³/min	m³/hr	cfm
Rotary Screw, Vane	ES2100	27.8	1.7	100	59	23.3	1.4	84	49	19.2	1.2	69	41
	ES2150	43.9	2.6	158	93	37.5	2.3	135	80	30.6	1.8	110	65
	ES2200	67.8	4.1	244	144	57.8	3.5	208	122	46.9	2.8	169	99
	ES2300	95.3	5.7	343	202	80.0	4.8	288	169	65.8	3.9	237	139
	ES2400	190.3	11.4	685	403	159.7	9.6	575	339	131.7	7.9	474	279
	ES2500	377.0	22.6	1357	798	319.2	19.2	1149	677	260.6	15.6	938	552
	ES2600	749.8	45	2699	1589	638.4	38.3	2298	1352	518.1	31.1	1865	1098

Climate Condition 2 - Outlet quality: <20mg/l oil in water

System Conditions

Ambient Temperature at Compressor Inlet: 35°C (95°F) Refrigeration Dryer Dewpoint If Fitted: 3°C
 Relative Humidity: 85% Minimum System Temperature If Refrigeration Dryer Is Not Fitted: 40°C (104°F)
 Compressor Discharge Temperature: 45°C (113°F) System Pressure: 7 bar g (102 psi g) Outlet quality: <20mg/l oil in water

No Refrigeration Dryer Installed in System		Oil Type											
		Band A Turbine, Additive Free				Band B Mineral, PAO, TMP, PE				Band C Diesters, Triesters, PAG			
Compressor Type	Model	L/s	m³/min	m³/hr	cfm	L/s	m³/min	m³/hr	cfm	L/s	m³/min	m³/hr	cfm
Rotary Screw, Vane	ES2100	13.9	0.8	50	30	11.7	0.7	42	25	9.7	0.6	35	21
	ES2150	22.2	1.3	80	47	18.9	1.1	68	40	15.6	0.9	56	33
	ES2200	34.2	2.1	123	73	29.2	1.7	105	62	23.6	1.4	85	50
	ES2300	48.1	2.9	173	102	40.3	2.4	145	85	33.1	2	119	70
	ES2400	96.1	5.8	346	204	80.6	4.8	290	171	66.4	4	239	141
	ES2500	190.0	11.4	684	403	161.1	9.7	580	341	131.4	7.9	473	278
	ES2600	378.4	22.7	1362	801	322.0	19.3	1159	682	261.4	15.7	941	554
Refrigeration Dryer Installed in System		Oil Type											
		Band A Turbine, Additive Free				Band B Mineral, PAO, TMP, PE				Band C Diesters, Triesters, PAG			
Compressor Type	Model	L/s	m³/min	m³/hr	cfm	L/s	m³/min	m³/hr	cfm	L/s	m³/min	m³/hr	cfm
Rotary Screw, Vane	ES2100	11.4	0.7	41	24	9.4	0.6	34	20	7.8	0.5	28	17
	ES2150	17.8	1.1	64	38	15.3	0.9	55	32	12.5	0.7	45	26
	ES2200	27.5	1.7	99	59	23.6	1.4	85	50	19.2	1.1	69	40
	ES2300	38.9	2.3	140	82	32.5	2	117	69	26.7	1.6	96	57
	ES2400	77.5	4.7	279	164	65.0	3.9	234	138	53.6	3.2	193	114
	ES2500	153.3	9.2	552	325	130.0	7.8	468	275	106.1	6.4	382	225
	ES2600	305.3	18.3	1099	647	260.0	15.6	936	551	210.9	12.7	759	447

For systems using 1 or 2 stage piston/reciprocating compressors multiply compressor flow by 1.4 and select a separator from screw compressor flow rates shown, ensuring due consideration is given to oil type. For sizing at conditions other than those shown, please contact Parker for correct product selection.

Climate Condition 1 - Outlet quality: <10mg/l oil in water

System Conditions				Refrigeration Dryer Dewpoint If Fitted: 3°C							
Ambient Temperature at Compressor Inlet: 25°C (77°F)				Minimum System Temperature If Refrigeration Dryer Is Not Fitted: 30°C (86°F)							
Relative Humidity: 65%				System Pressure: 7 bar g (102 psi g)							
Compressor Discharge Temperature: 35°C (95°F)				Outlet quality: <10mg/l oil in water							

No Refrigeration Dryer Installed in System		Oil Type											
		Band A Turbine, Additive Free				Band B Mineral, PAO, TMP, PE				Band C Diesters, Triesters, PAG			
Compressor Type	Model	L/s	m³/min	m³/hr	cfm	L/s	m³/min	m³/hr	cfm	L/s	m³/min	m³/hr	cfm
Rotary Screw, Vane	ES2100	20.6	1.2	74	43	17.2	1	62	36	14.2	0.9	51	30
	ES2150	32.5	2	117	69	27.8	1.7	100	59	22.5	1.4	81	48
	ES2200	50.3	3	181	106	42.5	2.6	153	90	34.7	2.1	125	73
	ES2300	70.3	4.2	253	149	59.2	3.5	213	125	48.6	2.9	175	103
	ES2400	140.8	8.4	507	298	118.1	7.1	425	250	97.2	5.8	350	206
	ES2500	278.6	16.7	1003	590	236.1	14.2	850	500	192.5	11.6	693	408
	ES2600	554.2	33.3	1995	1174	472.0	28.3	1699	1000	383.1	23	1379	812
Refrigeration Dryer Installed in System		Oil Type											
		Band A Turbine, Additive Free				Band B Mineral, PAO, TMP, PE				Band C Diesters, Triesters, PAG			
Compressor Type	Model	L/s	m³/min	m³/hr	cfm	L/s	m³/min	m³/hr	cfm	L/s	m³/min	m³/hr	cfm
Rotary Screw, Vane	ES2100	15.6	0.9	56	33	13.1	0.8	47	27	10.6	0.6	38	23
	ES2150	24.4	1.5	88	52	20.8	1.3	75	44	16.9	1	61	36
	ES2200	37.8	2.3	136	80	31.9	1.9	115	68	26.1	1.6	94	55
	ES2300	52.8	3.2	190	112	44.4	2.7	160	94	36.7	2.2	132	77
	ES2400	105.8	6.3	381	224	88.9	5.3	320	188	73.1	4.4	263	155
	ES2500	209.5	12.6	754	444	177.5	10.6	639	376	144.7	8.7	521	307
	ES2600	416.4	25	1499	883	354.8	21.3	1277	751	287.8	17.3	1036	610

Climate Condition 2 - Outlet quality: <10mg/l oil in water

System Conditions				Refrigeration Dryer Dewpoint If Fitted: 3°C							
Ambient Temperature at Compressor Inlet: 35°C (95°F)				Minimum System Temperature If Refrigeration Dryer Is Not Fitted: 40°C (104°F)							
Relative Humidity: 85%				System Pressure: 7 bar g (102 psi g)							
Compressor Discharge Temperature: 45°C (113°F)				Outlet quality: <10mg/l oil in water							

No Refrigeration Dryer Installed in System		Oil Type											
		Band A Turbine, Additive Free				Band B Mineral, PAO, TMP, PE				Band C Diesters, Triesters, PAG			
Compressor Type	Model	L/s	m³/min	m³/hr	cfm	L/s	m³/min	m³/hr	cfm	L/s	m³/min	m³/hr	cfm
Rotary Screw, Vane	ES2100	7.8	0.5	28	16	6.4	0.4	23	14	5.3	0.3	19	11
	ES2150	12.2	0.7	44	26	10.6	0.6	38	22	8.6	0.5	31	18
	ES2200	18.9	1.1	68	40	16.1	1	58	34	13.1	0.8	47	28
	ES2300	26.7	1.6	96	57	22.5	1.3	81	47	18.3	1.1	66	39
	ES2400	53.3	3.2	192	113	44.7	2.7	161	95	36.9	2.2	133	78
	ES2500	105.6	6.3	380	224	89.5	5.4	322	190	73.1	4.4	263	155
	ES2600	210.0	12.6	756	445	178.9	10.7	644	379	145.3	8.7	523	308
Refrigeration Dryer Installed in System		Oil Type											
		Band A Turbine, Additive Free				Band B Mineral, PAO, TMP, PE				Band C Diesters, Triesters, PAG			
Compressor Type	Model	L/s	m³/min	m³/hr	cfm	L/s	m³/min	m³/hr	cfm	L/s	m³/min	m³/hr	cfm
Rotary Screw, Vane	ES2100	6.4	0.4	23	13	5.3	0.3	19	11	4.4	0.3	16	9
	ES2150	10.0	0.6	36	21	8.6	0.5	31	18	6.9	0.4	25	15
	ES2200	15.3	0.9	55	33	13.1	0.8	47	28	10.6	0.6	38	22
	ES2300	21.7	1.3	78	46	18.1	1.1	65	38	15.0	0.9	54	32
	ES2400	43.1	2.6	155	91	36.1	2.2	130	77	29.7	1.8	107	63
	ES2500	85.3	5.1	307	181	72.2	4.3	260	153	58.9	3.5	212	125
	ES2600	169.7	10.2	611	359	144.5	8.7	520	306	117.2	7	422	248

For systems using 1 or 2 stage piston/reciprocating compressors multiply compressor flow by 1.4 and select a separator from screw compressor flow rates shown, ensuring due consideration is given to oil type. For sizing at conditions other than those shown, please contact Parker for correct product selection.

Climate Condition 1 - Outlet quality: <5mg/l oil in water

System Conditions
Ambient Temperature at Compressor Inlet: 25°C (77°F)

Refrigeration Dryer Dewpoint If Fitted: 3°C

Relative Humidity: 65%

Minimum System Temperature If Refrigeration Dryer Is Not Fitted: 30°C (86°F)

Compressor Discharge Temperature: 35°C (95°F)

System Pressure: 7 bar g (102 psi g)

Outlet quality: <5mg/l oil in water

No Refrigeration Dryer Installed in System		Oil Type											
		Band A Turbine, Additive Free				Band B Mineral, PAO, TMP, PE				Band C Diesters, Triesters, PAG			
Compressor Type	Model	L/s	m³/min	m³/hr	cfm	L/s	m³/min	m³/hr	cfm	L/s	m³/min	m³/hr	cfm
Rotary Screw, Vane	ES2100	10.3	0.6	37	22	8.6	0.5	31	18	7.2	0.4	26	15
	ES2150	16.4	1	59	34	13.9	0.8	50	29	11.4	0.7	41	24
	ES2200	25.0	1.5	90	53	21.4	1.3	77	45	17.2	1	62	37
	ES2300	35.3	2.1	127	75	29.4	1.8	106	63	24.4	1.5	88	52
	ES2400	70.3	4.2	253	149	59.2	3.5	213	125	48.6	2.9	175	103
	ES2500	139.2	8.4	501	295	118.1	7.1	425	250	96.4	5.8	347	204
	ES2600	277.2	16.6	998	587	235.9	14.2	849	500	191.4	11.5	689	406
Refrigeration Dryer Installed in System		Oil Type											
		Band A Turbine, Additive Free				Band B Mineral, PAO, TMP, PE				Band C Diesters, Triesters, PAG			
Compressor Type	Model	L/s	m³/min	m³/hr	cfm	L/s	m³/min	m³/hr	cfm	L/s	m³/min	m³/hr	cfm
Rotary Screw, Vane	ES2100	7.8	0.5	28	16	6.4	0.4	23	14	5.3	0.3	19	11
	ES2150	12.2	0.7	44	26	10.6	0.6	38	22	8.6	0.5	31	18
	ES2200	18.9	1.1	68	40	16.1	1	58	34	13.1	0.8	47	28
	ES2300	26.4	1.6	95	56	22.2	1.3	80	47	18.3	1.1	66	39
	ES2400	52.8	3.2	190	112	44.4	2.7	160	94	36.7	2.2	132	77
	ES2500	104.7	6.3	377	222	88.6	5.3	319	188	72.2	4.3	260	153
	ES2600	208.4	12.5	750	441	177.2	10.6	638	376	143.9	8.6	518	305

Climate Condition 2 - Outlet quality: <5mg/l oil in water

System Conditions
Ambient Temperature at Compressor Inlet: 35°C (95°F)

Refrigeration Dryer Dewpoint If Fitted: 3°C

Relative Humidity: 85%

Minimum System Temperature If Refrigeration Dryer Is Not Fitted: 40°C (104°F)

Compressor Discharge Temperature: 45°C (113°F)

System Pressure: 7 bar g (102 psi g)

Outlet quality: <5mg/l oil in water

No Refrigeration Dryer Installed in System		Oil Type											
		Band A Turbine, Additive Free				Band B Mineral, PAO, TMP, PE				Band C Diesters, Triesters, PAG			
Compressor Type	Model	L/s	m³/min	m³/hr	cfm	L/s	m³/min	m³/hr	cfm	L/s	m³/min	m³/hr	cfm
Rotary Screw, Vane	ES2100	3.9	0.2	14	8	3.3	0.2	12	7	2.8	0.2	10	6
	ES2150	6.1	0.4	22	13	5.3	0.3	19	11	4.2	0.3	15	9
	ES2200	9.4	0.6	34	20	8.1	0.5	29	17	6.7	0.4	24	14
	ES2300	13.3	0.8	48	28	11.1	0.7	40	24	9.2	0.6	33	20
	ES2400	26.7	1.6	96	57	22.5	1.3	81	47	18.3	1.1	66	39
	ES2500	52.8	3.2	190	112	44.7	2.7	161	95	36.4	2.2	131	77
	ES2600	105.0	6.3	378	223	89.5	5.4	322	190	72.5	4.4	261	154
Refrigeration Dryer Installed in System		Oil Type											
		Band A Turbine, Additive Free				Band B Mineral, PAO, TMP, PE				Band C Diesters, Triesters, PAG			
Compressor Type	Model	L/s	m³/min	m³/hr	cfm	L/s	m³/min	m³/hr	cfm	L/s	m³/min	m³/hr	cfm
Rotary Screw, Vane	ES2100	3.1	0.2	11	7	2.5	0.2	9	6	2.2	0.1	8	5
	ES2150	5.0	0.3	18	11	4.2	0.3	15	9	3.3	0.2	12	7
	ES2200	7.8	0.5	28	16	6.4	0.4	23	14	5.3	0.3	19	11
	ES2300	10.8	0.6	39	23	9.2	0.5	33	19	7.5	0.4	27	16
	ES2400	21.7	1.3	78	46	18.1	1.1	65	38	15.0	0.9	54	32
	ES2500	42.5	2.6	153	90	36.1	2.2	130	77	29.4	1.8	106	62
	ES2600	84.7	5.1	305	180	72.2	4.3	260	153	58.6	3.5	211	124

For systems using 1 or 2 stage piston/reciprocating compressors multiply compressor flow by 1.4 and select a separator from screw compressor flow rates shown, ensuring due consideration is given to oil type. For sizing at conditions other than those shown, please contact Parker for correct product selection.


ES2000 Series Oil / Water Separators

Separator Performance

Separator Models	Separator Type	Residual Oil in Water Content (Outlet)	Service Period
ES2100 - ES2600	Static	Each Separator model is sizeable to deliver a residual oil in water level of: <20mg/L <10mg/L <5mg/L	When oil in water levels exceed allowed levels

Technical Data

Model	ES2100	ES2150	ES2200	ES2300	ES2400	ES2500	ES2600
Inlet Connections	1 x 1/2" 1 x 1/4"	1 x 1/2" 1 x 1/4"	1 x 1/2" 1 x 1/4"	1 x 1/2" 3 x 1/4"			
Outlet Hose Connections	19mm (3/4")	25mm (1")	19mm (3/4")	25mm (1")	25mm (1")	25mm (1")	25mm (1")
Settlement Tank Capacity	N/A	60 litres	75 litres	125 litres	185 litres	355 litres	485 litres
Max. Pressure	16 bar g (232 psi g)						
Min/ Max Temperature	°C	5 to 35					
	°F	41 to 95					
Material (Recyclable)	Polyethylene						

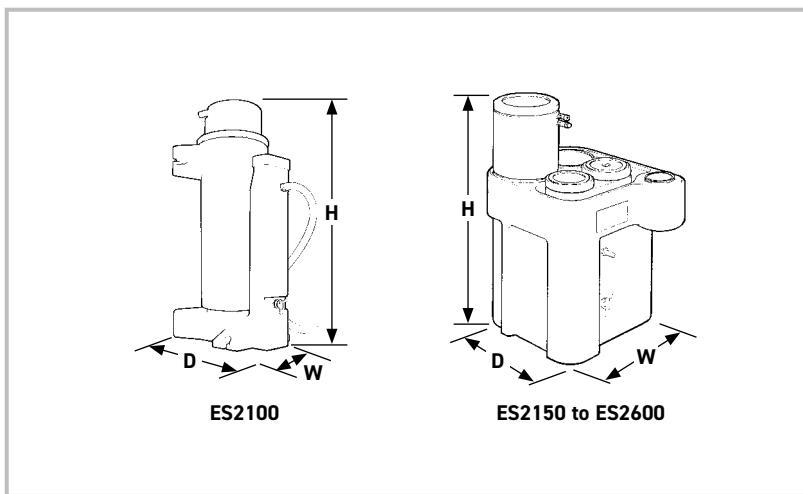

Weights and Dimensions

Model	Height (H)		Width (W)		Depth (D)		Weight			
	mm	ins	mm	ins	mm	ins	kg	lbs	kg	lbs
ES2100	842	33.1	250	9.8	315	12.4	6	13	24.5	154
ES2150	810	31.9	350	13.8	430	16.9	10	22	78.5	173
ES2200	805	31.7	350	13.8	450	17.7	12	26	93.5	206
ES2300	1195	47.0	500	19.7	800	31.5	27	59	159	350
ES2400	1195	47.0	650	26.6	800	31.5	36	79	217	477
ES2500	1535	60.4	700	27.6	985	38.8	70	154	400	880
ES2600	1535	60.4	1000	39.4	1010	39.8	97	214	550	1210

Parker Catalogue Numbers

Model	Catalogue Number
ES2100	ES2100-TI
ES2150	ES2150-TI
ES2200	ES2200-TI
ES2300	ES2300-TI
ES2400	ES2400-TI
ES2500	ES2500-TI
ES2600	ES2600-TI

Maintenance Kits

Model	Quantity Required	Part Number
ES2100-TI	1	ESMK1
ES2150-TI	1	ESMK1
ES2200-TI	1	ESMK1
ES2300-TI	1	ESMK2
ES2400-TI	2	ESMK2
ES2500-TI	1	ESMK3
ES2600-TI	2	ESMK3

Service Kits - Vent Filter

Model	Part Number
ES2100-TI	ESVF1
ES2150-TI	ESVF1
ES2200-TI	ESVF1
ES2300-TI	ESVF2
ES2400-TI	ESVF2
ES2500-TI	ESVF2
ES2600-TI	ESVF2

HDF & ED Level Sensing Condensate Drains

Technical Data

Drain Type	Drain Models	Minimum Operating Pressure		Maximum Operating Pressure		Minimum Operating Temperature		Maximum Operating Temperature	
		bar g	psi g	bar g	psi g	°C	°F	°C	°F
External Float	HDF120 - 220	1	15	16	232	2	35	60	140
Electronic Level Sensing	ED3002 - ED3100	1	15	16	232	2	35	60	140
Electronic Level Sensing	ED4100	16	232	50	725	2	35	50	122


Flow Rates - Zero Air Loss External Float Drains

Model	Pipe Size		Compressed Air Flow Rate					Electrical Supply	
	Inlet	Outlet	L/S	m³/min	m³/hr	cfm	cfm		
HDF120-A	1/2"	1/2"	1500	90	5400	3178	3178	-	
HDF180-A	1"	1/2"	1667	100	6000	3532	3532	-	
HDF220-A	1"	1/2"	4167	251	15000	8829	8829	-	
External float drain (with built-in air vent)									
HDF120	1/2"	1/2"	1500	90	5400	3178	3178	-	
HDF180	1"	1/2"	1667	100	6000	3532	3532	-	
HDF220	1"	1/2"	4167	251	15000	8829	8829	-	
External float drain (without air vent)									
HDF220BE	1"	1/2"	1806	109	6500	3826	3826	-	
External float drains BioEnergy									

Flow Rates - Zero Air Loss Electronic Level Sensing Drains

Model	Pipe Size		Compressed Air Flow Rate (Aftercooler / Air Receiver)				Compressed Air Flow Rate (Refrigeration Dryer)				Compressed Air Flow Rate (Filter)				Electrical Supply
	Inlet	Outlet	L/S	m³/min	m³/hr	cfm	L/S	m³/min	m³/hr	cfm	L/S	m³/min	m³/hr	cfm	
ED3002-G230	1 x G½	G¾	-	-	-	-	-	-	-	-	200	12	720	424	230/1/50-60
ED3004-G230	1 x G½	G¾	67	4	240	141	133	8	480	283	667	40	2400	1413	230/1/50-60
ED3007-G230	2 x G½	G¾	117	7	420	247	233	14	840	494	1167	70	4200	2472	230/1/50-60
ED3030-G230	2 x G½	G¾	500	30	1800	1059	1000	60	3600	2119	5000	301	18000	10595	230/1/50-60
ED3100-G230	2 x G½	G¾	1667	100	6000	3532	3334	200	12000	7063	16668	1002	60000	35316	230/1/50-60
230V/1PH/50-60Hz - 16 bar g (232 psi g)															
ED3007-G24D	2 x G½	G¾	117	7	420	247	233	14	840	494	1167	70	4200	2472	24V DC
ED3030-G24D	2 x G½	G¾	500	30	1800	1059	1000	60	3600	2119	5000	301	18000	10595	24V DC
ED3100-G24D	2 x G½	G¾	1667	100	6000	3532	3334	200	12000	7063	16668	1002	60000	35316	24V DC
24V DC - 16 bar g (232 psi g)															
ED4100/50-G230	G½	G¼	1667	100	6000	3532	3334	200	12000	7063	16668	1002	60000	35316	230/1/50-60
230V/1PH/50-60Hz - 50 bar g (725 psi g)															
ED4100/50-G24D	G½	G¼	1667	100	6000	3532	3334	200	12000	7063	16668	1002	60000	35316	24V DC
24V DC - 50 bar g (725 psi g)															

Stated flows are for operation at max operating pressure shown above, ambient air 25°C (77°F) / 60% RH, compressor discharge temperature 35°C (95°F), refrigeration dryer pressure dewpoint +3°C, with reference to 20°C, 1 bar (a), 0% relative water vapour pressure. Refrigeration dryer and filter flow rates assume adequate condensate drainage upstream.

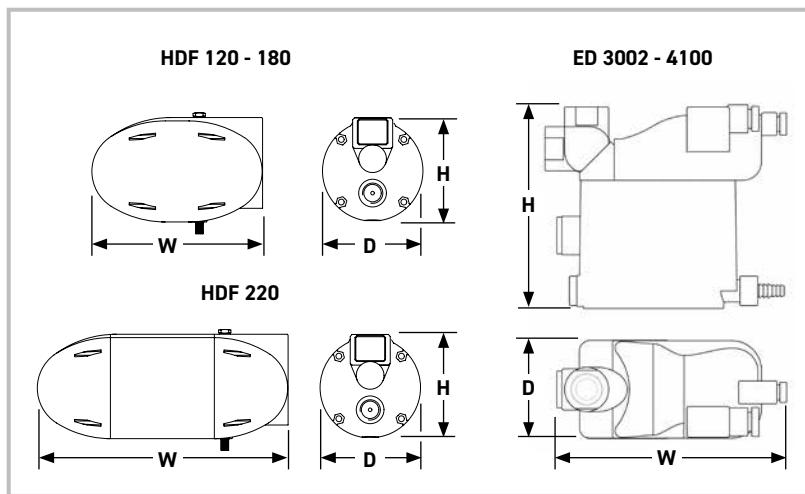

Weight & Dimensions

Model	Height (H)		Width (W)		Depth (D)		Weight	
	mm	ins	mm	ins	mm	ins	kg	lbs
HDF120	111	4.4	156	6.1	108	4.3	0.9	2.0
HDF180	111	4.4	156	6.1	108	4.3	0.9	2.0
HDF220	111	4.4	266	10.5	108	4.3	1.9	4.2
HDF220BE	111	4.4	266	10.5	108	4.3	1.9	4.2
ED3002	146	5.7	110	4.3	67	2.6	0.5	1.1
ED3004	139	5.5	101	4.0	67	2.6	0.6	1.3
ED3007	164	6.5	122	4.8	67	2.6	1	2.2
ED3030	164	6.5	137	5.4	67	2.6	1	2.2
ED3100	164	6.5	197	7.8	67	2.6	2	4.4
ED4100	115	4.5	178	7.0	87	3.4	1.9	4.2

Parker Catalogue Numbers (HDF Drains)

Model	Catalogue Number BSPP / 16 bar g	Catalogue Number BSPP/ 16 bar g + Vent	Catalogue Number NPT / 16 bar g + Vent
HDF120	HDF120	HDF120A	HDF120NPTA
HDF180	HDF180	HDF180A	HDF180NPTA
HDF220	HDF220	HDF220A	HDF220NPTA

Parker Catalogue Numbers (ED Drains)

Model	Catalogue Number 230V, 50-60 Hz / 16 bar g	Catalogue Number 24V DC / 16 bar g
ED3002	ED3002-G230	-
ED3004	ED3004-G230	-
ED3007	ED3007-G230	ED3007-G24D
ED3030	ED3030-G230	ED3030-G24D
ED3100	ED3100-G230	ED3100-G24D

Hypercool Air and Water Cooled Aftercoolers

Technical Data - Hypercool Water Cooled

Model	Flow Rate		Maximum Operating Pressure		Pipe Conn.	
	m³/h	m³/min	bar g	psi g	Air	Water


Standard Version

WFN050	3000	50	12	174	DN125	1½"
WFN090	5400	90	12	174	DN200	1¼"

Removable Tube-Bundle

WRN007	420	7	16	232	DN 50	½"
WRN016	960	16	16	232	DN 80	¾"
WRN028	1680	28	12	174	DN 100	1"
WRN050	3000	50	12	174	DN 125	1¼"
WRN090	5400	90	12	174	DN 200	1¼"
WRN130	7800	130	10	145	DN 250	1½"
WRN170	10200	170	10	145	DN 300	2"
WRN250	15000	250	10	145	DN 350	DN 65
WRN350	21000	350	10	145	DN 450	DN 80
WRN450	27000	450	10	145	DN 500	DN 100
WRN550	33000	550	10	145	DN 600	DN 100

Performances refer to clean cooler conditions with air at FAD 20°C / 1 bar A, and at the following working conditions: air suction 25°C / 60%RH, 7 bar g working pressure, 120°C compressed air inlet temperature, temperature approach between air outlet and water inlet of ca. 10°C. Maximum air inlet temperature: 200°C (for higher temperatures and other gases contact Parker Sales Companies).

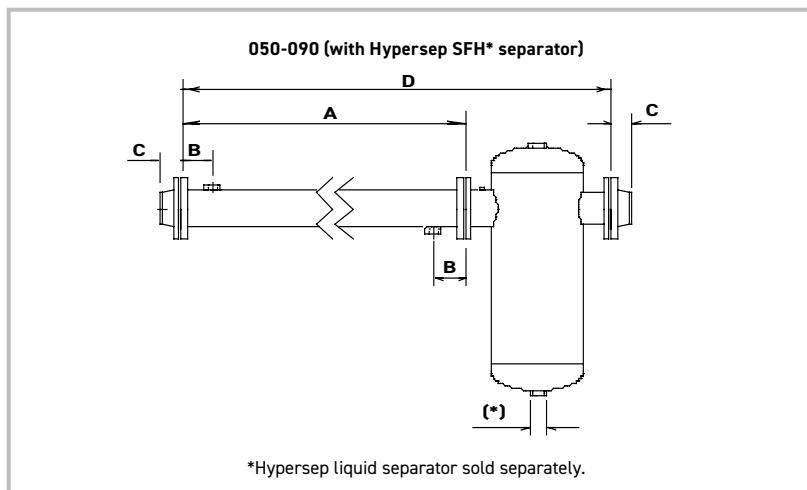

Weights and Dimensions - Hypercool Water Cooled

Model	A		B		C		D		Weight	
	mm	ins	mm	ins	mm	ins	mm	ins	kg	lbs

Standard Version

WFN050	1300	51.2	100	3.9	58	2.3	1963	77.3	71	156
WFN090	1300	51.2	100	3.9	65	2.6	1990	78.3	121	266

Removable Tube-Bundle

WRN007	1050	41.3	72	2.8	77	3.0	1257	49.5	20	44
WRN016	1300	51.2	122	4.8	92	3.6	1563	61.5	37	81
WRN028	1300	51.2	122	4.8	55	2.2	1703	67.0	54	119
WRN050	1300	51.2	123	4.8	58	2.3	1853	73.0	71	156
WRN090	1300	51.2	117	4.6	65	2.6	1873	73.7	161	354
WRN130	1300	51.2	116	4.6	71	2.8	1983	78.1	194	427
WRN170	1300	51.2	116	4.6	71	2.8	2053	80.8	244	537
WRN250	1500	59.1	196.5	7.7	71	2.8	2503	98.5	351	772
WRN350	1500	59.1	148.5	5.8	75	3.0	2703	106.4	400	880
WRN450	1500	59.1	199.5	7.9	78	3.1	3436	135.3	609	1340
WRN550	1515	59.6	200	7.9	83	3.3	3606	142.0	931	2048

Hyperchill Plus Industrial Water Chiller

Technical Data

Model ICEP		002-W	003-W	005-W	007-W	010-W	014-W	020-W	024-W	030-W	040-W	050-W	060-W
Cooling capacity ¹	kW	1.7	3.3	5.2	7.8	10.8	14.6	20.3	23.6	29.7	40.6	49.0	58.3
Compressor abs. power ¹	kW	0.7	1.3	1.4	1.7	2.5	3.2	4.4	5.4	5.7	7.5	10.0	12.3
SEPR ³		4.58	4.50	5.00	5.00	5.22	5.30	5.02	5.02	5.00	5.13	5.12	5.11
Power supply	V/ph/Hz	230/1/50				400/3/50							
Protection index		33				54							
Refrigerant		R407c											

Compressor

Type		hermetic pistons				scroll								
Compressors / circuit		1 / 1												
Max.abs. power ¹ compressor	kW	0.7	1.3	1.5	2.4	3.8	4.4	5.7	6.6	8.3	11.4	14.9	17.3	

Axial Fans

Quantity	n.°	1	1	1	1	1	1	2	2	2	2	2	2
Max. abs. power ¹ fan	kW	0.07	0.12	0.12	0.3	0.3	0.4	0.4	0.4	0.45	0.69	0.69	0.69
Air flow	m ³ /h	430	1295	1295	3437	3437	4337	6878	6159	9437	16029	15215	16875

Water Cooled Version

Condenser water flow	m ³ /h	N.A.				1.5	2.1	2.5	2.9	3.9	5.1	5.9
Condenser connections	in	N.A.				¾"	¾"	¾"	1"	1¼"	1¼"	1½"

Pump P30

Max.abs.power	kW	0.4	0.4	0.4	0.9	0.9	1.0	1.3	1.3	1.3	2.2	2.2	2.2
Water flow (nom./max) ¹	m ³ /h	0.3/1.9	0.6/1.9	0.9/1.9	1.3/4.8	1.8/4.8	2.5/6	3.4/9.6	4.9/9.6	5.1/9.6	6.9/18	8.4/18	10.1/18
Head pressure (nom./max) ¹	m H ₂ O	35/5	33/5	26/5	30/12.8	29/12.8	29/21	29/17.3	28/17.3	26/17.3	29/23.1	27/23.1	25/23.1

Weights & Dimensions


Width	mm	520	755	755	756	756	756	756	756	756	856	856	856
Depth	mm	500	535	535	806	806	806	1206	1206	1206	1956	1956	1956
Height	mm	550	801	801	1405	1405	1405	1405	1405	1405	1680	1680	1680
Connections in/out	in	½"	¾"	¾"	¾"	¾"	¾"	1"	1"	1"	1½"	1½"	1½"
Tank capacity	l	15	15	22.5	65	65	65	100	100	130	250	250	250
Weight (axial)	kg	40	80	85	160	165	175	220	230	250	450	470	510
Weight (water cooled)	kg	n/a	n/a	n/a	n/a	n/a	175	220	230	250	450	470	510

Noise level

Sound pressure (axial) ²	dB(A)	52	52	52	53	53	50	50	50	51	52	52	53
-------------------------------------	-------	----	----	----	----	----	----	----	----	----	----	----	----

- 1) At water in/out temperature 20/15°C, glycol 0%, either 25°C ambient temperature (air-cooled models) or 25°C condenser water inlet temperature with 35°C condensing temperature (water-cooled models).
- 2) Referred to axial fan version in free field conditions at a distance of 10 m from until, measured on condenser side, 1m from ground.
- 3) Value calculated in accordance with the European regulation (EU) 2016/2281 with regards to Ecodesign requirements for high temperature process chillers.

As the manufacturer of process chillers delivering water at a design temperature of 15°C, Parker Hannifin Manufacturing s.r.l., Gas Separation and Filtration Division EMEA, declares that Parker chillers are exempt from Ecodesign EU regulation 2016/2281.

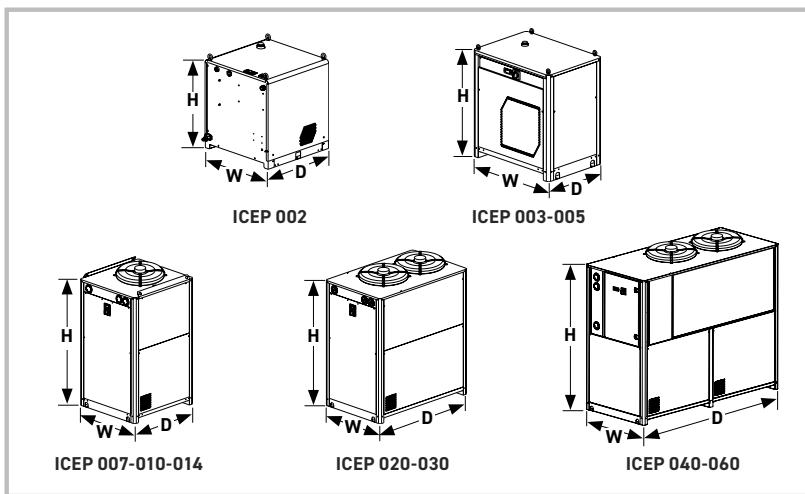

Correction Factors

A)	Ambient Temperature	°C	5	10	15	20	25	30	35	40	45
	Correction Factor (f1)		1.05	1.05	1.05	1.05	1	0.94	0.89	0.84	0.80
B)	Water Outlet Temperature	°C	5	10	15	20	25				
	Correction Factor (f2)		0.76	0.87	1	1.04					
C)	Glycol (by weight)	%	0	10	20	30					
	Correction Factor (f3)		1	0.99	0.98	0.97					
D)	Condenser Water Inlet Temp.	°C	20	25	30	35					
	Correction Factor (f4)		1.05	1	0.95	0.9					

To obtain the required cooling capacity, multiply the value at nominal conditions by the above correction factors (i.e. cooling capacity = $P \times f1 \times f2 \times f3 \times f4$, where P is the cooling capacity at the water outlet temperature of 15°C). Hyperchill Plus, in its standard configuration, can operate up to ambient temperatures of max. 48°C and min. 5°C and water temperatures of max. 30°C inlet and min. 0°C outlet. The above correction factors are approximative: for a precise selection, always refer to the software selection programme.

Hyperchill Plus Industrial Water Chiller (50Hz)

Part Number Breakdown / Product Key

Product Code	Model	-	Fluid to be Cooled	Condenser Section	Power Supply	Pumps	Water Tank	Control Water Temp.	Low Ambient	Low Water	Antifreeze	Fill Kit Mounted	Options
ICEP	002	-	W	A	S	P1	T	C	FS	LW	A	0	P
	003			W	T	P3	0	0	L1	00	0	1	S
	005			T		P5			L2			2	D
	007			B		00			00			3	C
	010			C		D3							1
	014			W = Water		S = 230V/1Ph/50Hz		T = With Tank		LW = Low Water			
	020							0 = Without Tank		00 = No Low Water			
	024												
	030												
	040			A = Air Axial		P1 = Single Pump 1.5 bar		C = Close Control +/- 0.5°C		A = With Antifreeze			
	050			W = Water		P3 = Single Pump 3 bar		0 = Without Close Control		0 = Without Fill Kit			
	060			T = Tropicalised		P5 = Single Pump 5 bar		FS = Fan Speed Control (Low Ambient -10°C)		1 = Ambient Manual Fill Kit			
				B = BioEnergy & Aggressive Ambients		00 = No Pump		L1 = Low Ambient -10°C (Fan Step Control)		2 = Ambient Automatic Fill Kit			
				C = High Head Pressure Fans		D3 = Dual Pump 3 bar		L2 = Low Ambient -20°C		3 = Pressurised Fill Kit			
								00 = No Low Ambient					

Hyperchill Plus Industrial Water Chiller (50Hz)

Standard Part Numbers - Air Cooled with Axial Fans

Hyperchill Plus Air Cooled with axial fans (non ferrous open hydraulic circuit with tank and 3 bar pump)	
ICEP002-W	ICEP002-WASP3T0000001
ICEP003-W	ICEP003-WASP3T0000001
ICEP005-W	ICEP005-WASP3T0000001
Hyperchill Plus Air Cooled with axial fans (non ferrous pressurized closed hydraulic circuit with tank and 3 bar pump)	
ICEP005-W	ICEP005-WATP3T0000000
ICEP007-W	ICEP007-WATP3T0000000
ICEP010-W	ICEP010-WATP3T0000000
ICEP014-W	ICEP014-WATP3T0000000
ICEP020-W	ICEP020-WATP3T0L10000
ICEP024-W	ICEP024-WATP3T0L10000
ICEP030-W	ICEP030-WATP3T0L10000
ICEP040-W	ICEP040-WATP3T0L10000
ICEP050-W	ICEP050-WATP3T0L10000
ICEP060-W	ICEP060-WATP3T0L10000

Options & Standard Features - Air Cooled with Axial Fans

	ICEP002-W	ICEP003-W	ICEP005-W	ICEP007-W	ICEP010-W	ICEP014-W	ICEP020-W	ICEP024-W	ICEP030-W	ICEP040-W	ICEP050-W	ICEP060-W
Differential pressure switch	standard											
MODBUS				standard								
Eyebolts	standard	standard	standard	standard	standard	standard						
Non ferrous hydraulic circuit with water tank and 3 bar pump	standard											
Low ambient -10°C with fan step control							standard	standard	standard	standard	standard	standard
No tank	•	•	•	•	•	•	•	•	•	•	•	•
No tank & no pump	•	•	•	•	•	•	•	•	•	•	•	•
No pump	•	•	•	•	•	•	•	•	•	•	•	•
P50 (5 bar pump)		•	•	•	•	•	•	•	•	•	•	•
P15 (1.5 bar pump)				•	•	•	•	•	•	•	•	•
Dual pump P30 (3 bar pump)										•	•	•
Harting plug	•	•	•	•	•	•	•	•	•	•	•	•
Close control (+/- 0.5°C)	•	•	•	•	•	•	•	•	•	•	•	•
Low water -10°C				•	•	•	•	•	•	•	•	•
Low ambient -10°C with fan speed control				•	•	•	•	•	•	•	•	•
Low ambient -20°C with fan speed control, crankcase heater and electrical panel heater					•	•	•	•	•	•	•	•
Antifreeze heating					•	•	•	•	•	•	•	•
BioEnergy & aggressive ambients protection					•	•	•	•	•	•	•	•
Tropicalization (53°C)						•	•	•		•	•	•
Differential dynamic set point					•	•	•	•	•	•	•	•

Hyperchill Plus Industrial Water Chiller (50Hz)

Standard Part Numbers -

Air Cooled with High Head Pressure Fan For Air Channeling

Hyperchill Plus Air Cooled with high head pressure fans for air channeling (non ferrous pressurized closed hydraulic circuit with tank and 3 bar pump)	
ICEP040-W	ICEP040-WWTP3T0L10000
ICEP050-W	ICEP050-WWTP3T0L10000
ICEP060-W	ICEP060-WWTP3T0000000

Options & Standard Features -

Air Cooled with High Head Pressure Fan For Air Channeling

	ICEP040-W	ICEP050-W	ICEP060-W
Differential pressure switch	standard	standard	standard
MODBUS	standard	standard	standard
Non ferrous hydraulic circuit with water tank and 3 bar pump	standard	standard	standard
Low ambient -10°C with fan step control	standard	standard	standard
No tank	•	•	•
No tank & no pump	•	•	•
No pump	•	•	•
P50 (5 bar pump)	•	•	•
P15 (1.5 bar pump)	•	•	•
Dual pump P30 (3 bar pump)	•	•	•
Harting plug	•	•	•
Close control (+/- 0.5°C)	•	•	•
Low water -10°C	•	•	•
Antifreeze heating	•	•	•
Differential dynamic set point	•	•	•

Standard Part Numbers -

Water Cooled

Hyperchill Plus Water Cooled (non ferrous pressurized closed hydraulic circuit with tank and 3 bar pump)	
ICEP014-W	ICEP014-WWTP3T0000000
ICEP020-W	ICEP020-WWTP3T0000000
ICEP024-W	ICEP024-WWTP3T0000000
ICEP030-W	ICEP030-WWTP3T0000000
ICEP040-W	ICEP040-WWTP3T0000000
ICEP050-W	ICEP050-WWTP3T0000000
ICEP060-W	ICEP060-WWTP3T0000000

Options & Standard Features -

Water Cooled

ICEP014-W	ICEP020-W	ICEP024-W	ICEP030-W	ICEP040-W	ICEP050-W	ICEP060-W
standard						
standard	standard	standard	standard	standard	standard	
standard						
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•

Hyperchill Plus Industrial Water Chiller (60Hz UL*)

*ICEP002: UL Compliant / ICEP003-024: UL Listed

Part Number Breakdown / Product Key

Product Code	Model	-	Fluid to be Cooled	Condenser Section	Power Supply	Pumps	Water Tank	Control Water Temp.	Low Ambient	Low Water	Antifreeze	Fill Kit Mounted	Options
ICEP	002	-	W	A	F	P1	T	C	FS	00	A	0	P
	003			W	G	P3	0	0	L1		0	1	D
	005			B		P5			L2			2	C
	007					00			00			3	1
	010												
	014												
	020												
	024												
W = Water				F = 230V/1Ph/60Hz			T = With Tank			00 = No Low Water			
A = Air Axial				P1 = Single Pump 1.5 bar			C = Close Control +/- 0.5°C			A = With Antifreeze			
W = Water				P3 = Single Pump 3 bar			0 = Without Close Control			0 = Without Antifreeze			
B = Air Axial Bioenergy				P5 = Single Pump 5 bar			FS = Fan Speed Control (Low Ambient -10°C)			0 = Without Fill Kit			
00 = No Pump				00 = No Pump			L1 = Low Ambient -10°C (Fan Step Control)			1 = Ambient Manual Fill Kit			
00 = No Pump				00 = No Pump			L2 = Low Ambient -20°C			2 = Ambient Automatic Fill Kit			
00 = No Pump				00 = No Pump			00 = No Low Ambient			3 = Pressurised Fill Kit			
ICEP = Hyperchill Plus				FS = Fan Speed Control (Low Ambient -10°C)			P = Harting Plug For Signals			D = Differential Dynamic Set Point			
ICEP = Hyperchill Plus				L1 = Low Ambient -10°C (Fan Step Control)			C = Control Panel Cover			1 = Manual External Bypass			
ICEP = Hyperchill Plus				L2 = Low Ambient -20°C			No Character = No Options Selected			0 = Without Fill Kit			
ICEP = Hyperchill Plus				00 = No Low Ambient			1 = Ambient Manual Fill Kit			2 = Ambient Automatic Fill Kit			
ICEP = Hyperchill Plus				00 = No Low Ambient			3 = Pressurised Fill Kit			P = Harting Plug For Signals			
ICEP = Hyperchill Plus				00 = No Low Ambient			D = Differential Dynamic Set Point			C = Control Panel Cover			
ICEP = Hyperchill Plus				00 = No Low Ambient			1 = Manual External Bypass			No Character = No Options Selected			

Versions

	ICEP002-W	ICEP003-W	ICEP005-W	ICEP007-W	ICEP010-W	ICEP014-W	ICEP020-W	ICEP024-W
Open Circuit	•	•	•					
Closed Circuit			•	•	•	•	•	•
Water Cooled					•	•	•	•

Available with ambient manual fill kit fitted

Hyperchill Plus Industrial Water Chiller (60Hz UL*)

Standard Part Numbers - Air Cooled with Axial Fans

Hyperchill Plus Air Cooled with axial fans (non ferrous open hydraulic circuit with tank and 3 bar pump)	
ICEP002-W	ICEP002-WAFP3T0000001
ICEP003-W	ICEP003-WAFP3T0000001
ICEP005-W	ICEP005-WAFP3T0000001
Hyperchill Plus Air Cooled with axial fans (non ferrous pressurized closed hydraulic circuit with tank and 3 bar pump)	
ICEP005-W	ICEP005-WAFP3T0000000
ICEP007-W	ICEP007-WAGP3T0000000
ICEP010-W	ICEP010-WAGP3T0000000
ICEP014-W	ICEP014-WAGP3T0000000
ICEP020-W	ICEP020-WAGP3T0L10000
ICEP024-W	ICEP024-WAGP3T0L10000

Options & Standard Features - Air Cooled with Axial Fans



	ICEP002-W	ICEP003-W	ICEP005-W	ICEP007-W	ICEP010-W	ICEP014-W	ICEP020-W	ICEP024-W
Differential pressure switch	standard							
MODBUS				standard	standard	standard	standard	standard
Eyebolts	standard	standard	standard	standard	standard	standard		
Non ferrous hydraulic circuit with water tank and 3 bar pump	standard							
Low ambient -10°C with fan step control							standard	standard
No tank	•	•	•	•	•	•	•	•
No tank & no pump	•	•	•	•	•	•	•	•
No pump	•	•	•	•	•	•	•	•
P50 (5 bar pump)		•	•	•	•	•	•	•
P15 (1.5 bar pump)				•	•	•	•	•
Harting plug for signals	•	•	•	•	•	•	•	•
Close control (+/- 0.5°C)		•	•	•	•	•	•	•
Low water -10°C				•	•	•	•	•
Low ambient -10°C with fan speed control				•	•	•	•	•
Low ambient -20°C with fan speed control, crankcase heater and electrical panel heater				•	•	•	•	•
BioEnergy & aggressive ambients protection				•	•	•	•	•
Differential dynamic set point				•	•	•	•	•

Hyperchill Plus - Kits and Accessories

Available Kits and Accessories

	ICEP002-W	ICEP003-W	ICEP005-W	ICEP007 - ICEP014	ICEP020 - ICEP030	ICEP040 - ICEP060
Fill kit - ambient manual*** Non-ferrous ambient manual kits, for water filling in any installation.				398H785314	398H785314	398H785314
Fill kit - ambient automatic*** Non-ferrous ambient automatic kits, for water filling in any installation.				398H785316	398H785316	398H785316
Fill kit - pressurised automatic with expansion tank*** Non-ferrous pressurized, automatic kits, with expansion tank. For water filling in any installation.			398H785312	398H785304	398H785304	398H785304
Remote control - base Base version for remote ON/OFF and general alarm monitoring.	398H785009	398H785009	398H785009	398H785010	398H785010	398H785010
Remote control - advanced Advanced version for complete remote unit monitoring.				398H785307	398H785307	398H785307
Wheels For ease of transport.	398H785302	398H785301	398H785301	398H785301		
Control panel cover***				398H785303	398H785303	398H785303
Manual external bypass*** Non-ferrous, externally adjustable allowing the correct flow through the system to be set.		398H785305	398H785305	398H785305	398H785306	398H785317

***From model ICEP007: ambient manual and automatic fill kit, pressurised automatic fill kit, control panel cover, manual external bypass can be supplied already installed or loose.

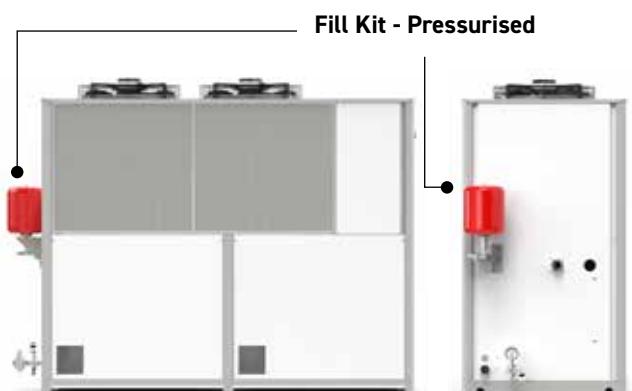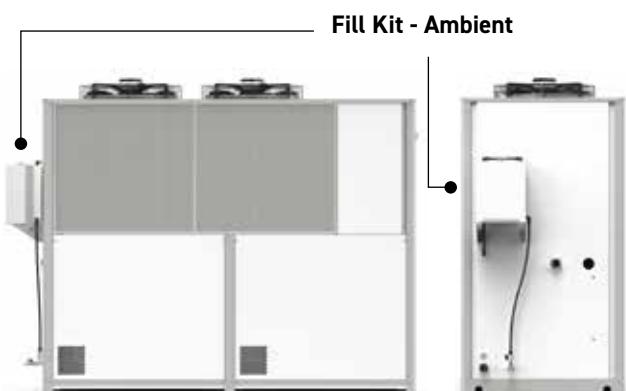

Hyperchill Industrial Process Chiller

Technical Data

Model ICE		076	090	116	150	183	230	310	360
Cooling capacity ¹	kW	76.0	90.2	115.5	149.2	182.3	228	309	360
Compressor abs. power ¹	kW	15.4	20.3	24.9	30.8	40.1	51.4	65	82
SEPR ³		5.39	5.04	5.08	5.35	5.04	5.02	5.51	5.73
Power supply	V/ph/ Hz				400/3/50 no neutral				
Protection index					54				
Refrigerant					R407C				

Compressors

Type		Hermetic scroll							
Compressors/circuits		2/2			4/2				
Max abs. power - 1 comp.	kW	11.1	13.7	16.8	11.1	13.7	16.8	23.3	28.7

Axial Fans

Quantity	n°	3			2		3	4	
Max abs. power - 1 fan	kW	0.78	0.78	0.78	2	2	2	2	2
Air flow	m ³ /h	25500	25000	26400	47000	46000	66000	88000	88000

Centrifugal Fans

Quantity	N°	3			3			N.A.	
Max abs. power - 1 fan	kW	1.5	1.5	1.5	3	3	3		
Air flow	m ³ /h	25500	25000	26400	47000	46000	66000		
Head pressure	Pa	100	100	100	180	180	130		

Water Cooled Version

Condenser water flow	m ³ /h	11.1	11.5	16.6	19.2	31.0	33.0	N.A.	
Condensers connections	in	1 1/4"	1 1/4"	1 1/4"	1 1/4"	1 1/4"	1 1/2"		

Pump P30

Max abs.power	kW	2.5	2.7	2.7	4.5	4.5	4.5	8.4	8.4
Water flow (nom/max) ¹	m ³ /h	13/31	15/27	20/27	25/50	30/50	39/50	53/90	62/90
Head pressure (nom/min) ¹	m H ₂ O	23/13	28/16	25/16	34/20	32/20	26/20	26/19	23/19

Weights & Dimensions

Width	mm	898	898	898	1287	1287	1287	1500	1500
Depth	mm	2200	2200	2200	3000	3000	3260	4200	4200
Height	mm	1984	1984	1984	2298	2298	2298	2240	2240
Connections in/out	in	2"	2"	2"	2 1/2"	2 1/2"	2 1/2"	4"	4"
Tank capacity	l	500	500	500	1000	1000	1000	400	400
Weight (axial)	kg	800	900	1000	1500	1800	2100	2900	3100
Weight (centrif.)	kg	950	1050	1150	1700	2000	2300	N.A.	
Weight (water cooled)	kg	800	900	1000	1500	1800	2100		

Noise level


Sound pressure (axial) ²	dB(A)	58	58	58	62	62	64	65	65
-------------------------------------	-------	----	----	----	----	----	----	----	----

1) At water in/out temperature 20/15°C, glycol 0%, either 25°C ambient temperature (air-cooled models) or 25°C condenser water inlet temperature with 35°C condensing temperature (water-cooled models).

2) Referred to axial fan version in free field conditions at a distance of 10 m from until, measured on condenser side, 1m from ground.

3) Value calculated in accordance with the European regulation (EU) 2016/2281 with regards to Ecodesign requirements for high temperature process chillers.

As the manufacturer of process chillers delivering water at a design temperature of 15°C, Parker Hannifin Manufacturing s.r.l., Gas Separation and Filtration Division EMEA, declares that Parker chillers are exempt from Ecodesign EU regulation 2016/2281.

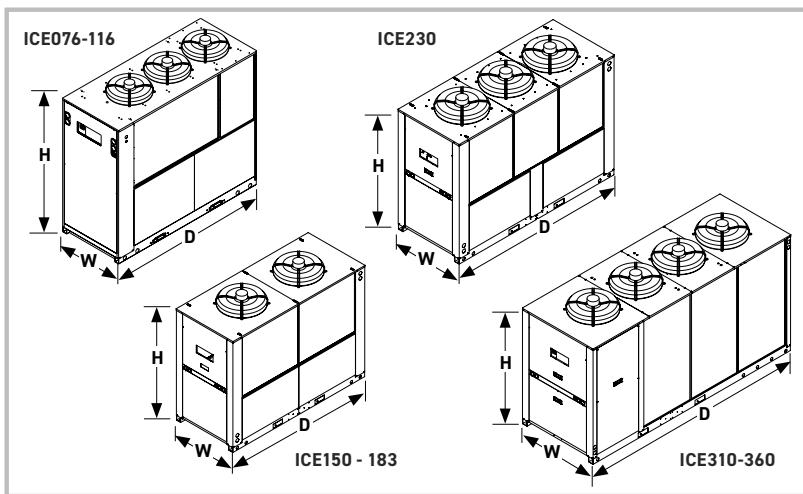

Correction Factors

A)	Ambient Temperature (Air Cooled Models)	°C	5	10	15	20	25	30	35	40	45
	Correction Factor (f1)		1.05	1.05	1.05	1.05	1	0.95	0.89	0.83	0.77
B)	Water Outlet Temperature	°C	5	10	15	20	25				
	Correction Factor (f2)		0.72	0.86	1	1	1				
C)	Glycol	%	0	10	20	30	40				
	Correction Factor (f3)		1	0.99	0.98	0.97	0.96	0.94			
D)	Condenser Water Inlet Temp. (Water Cooled Models)	°C	20	25	30	35					
	Correction Factor (f4)		1.05	1	0.95	0.9	0.85				

To obtain the required cooling capacity multiply the value at nominal conditions by the above correction factors (i.e. cooling capacity = $P \times f1 \times f2 \times f3 \times f4$, where P is the cooling capacity at conditions (1)). Hyperchill, in its standard configuration, can operate up to ambient temperatures of max 45°C and min. 5°C and water temperatures of max 30°C inlet and min. 0°C outlet. The above correction factors are approximative: for a precise selection always refer to the software selection programme.

Hyperchill Industrial Process Chiller (50Hz)

Part Number Breakdown / Product Key

Product Code	Model	Condenser Section	Power Supply	Pumps	Hydraulic Circuit	Control Water Temp.	Low Ambient	Low Water	Antifreeze
ICE	076	A	400350	1P15	FF	C	L1	LW	A
	090	W		1P30	NF	0	L2	00	0
	116	B		2P30	F0		00		
	150			1P50					
	183			0000					
	230								
	310								
	360								
400350 = 400V/3Ph/50Hz				C = Close Control +/- 0.5°C 0 = Without Close Control			LW = Low Water 00 = No Low Water		
ICE = Hyperchill		A = Air Axial W = Water B = BioEnergy & Aggressive Ambients		1P15 = Single Pump 1.5 bar 1P30 = Single Pump 3 bar 2P30 = Dual Pump 3 bar P5 = Single Pump 5 bar 0000 = No Pump		FF = With Tank NF = Non Ferrous 0 = Without Tank		L1 = Low Ambient -10°C (Fan Step Control) L2 = Low Ambient -20°C 00 = No Low Ambient	

Versions

	ICE076	ICE090	ICE116	ICE150	ICE183	ICE230	ICE310	ICE360
Air Cooled with Axial Fans	•	•	•	•	•	•	•	•
Air Cooled with High Head Pressure Fans	ON REQUEST							
Water Cooled	•	•	•	•	•	•		

Hyperchill Industrial Process Chiller (50Hz)

Standard Part Numbers - Air Cooled with Axial Fans

Hyperchill Air Cooled with Axial Fans	
ICE076	ICE076A4003501P30FF000000
ICE090	ICE090A4003501P30FF000000
ICE116	ICE116A4003501P30FF000000
ICE150	ICE150A4003501P30FF000000
ICE183	ICE183A4003501P30FF000000
ICE230	ICE230A4003501P30FF000000
ICE310	ICE310A4003501P30F00LA000
ICE360	ICE360A4003501P30F00LA000

Options & Standard Features - Air Cooled with Axial Fans

	ICE076	ICE090	ICE116	ICE150	ICE183	ICE230	ICE310	ICE360
Water tank	standard	standard	standard	standard	standard	standard	•	•
Without tank							standard	standard
P30 (3 bar pump)	standard	standard	standard	standard	standard	standard	•	•
No pump	•	•	•	•	•	•	standard	standard
P50 (5 bar pump)	•	•	•	•	•	•	•	•
P15 (1.5 bar pump)	•	•	•	•	•	•	on request	on request
Dual pump P30 (3 bar pump)	•	•	•	•	•	•	•	•
Close control (+/- 0.5°C)	•	•	•	•	•	•		
Low water -10°C	•	•	•	•	•	•	on request	on request
Low ambient -10°C with fan step control	•	•	•	•	•	•	standard	standard
Low ambient -20°C with fan speed control, crankcase heater and electrical panel heater	•	•	•	•	•	•	on request	on request
Antifreeze heating	•	•	•	•	•	•	on request	on request
BioEnergy & aggressive ambients protection	•	•	•	•	•	•	•	•
Non ferrous hydraulic circuit	•	•	•	•	•	•		
MODBUS	on request							

Hyperchill Industrial Process Chiller (50Hz)

Standard Part Numbers -

Air Cooled with High Head Pressure Fans

Hyperchill Air Cooled with High Head Pressure Fans	
ICE076	ON REQUEST
ICE090	
ICE116	

Standard Part Numbers -

Water Cooled

Hyperchill Water Cooled	
ICE076	ICE076W4003501P30FF000000
ICE090	ICE090W4003501P30FF000000
ICE116	ICE116W4003501P30FF000000
ICE150	ICE150W4003501P30FF000000
ICE183	ICE183W4003501P30FF000000
ICE230	ICE230W4003501P30FF000000

Options & Standard Features -

Air Cooled with High Head Pressure Fans

	ICE076	ICE090	ICE116
Water tank	standard	standard	standard
P30 (3 bar pump)	standard	standard	standard
No pump	•	•	•
P50 (5 bar pump)	•	•	•
P15 (1.5 bar pump)	•	•	•
Dual pump P30 (3 bar pump)	•	•	•
Close control (+/- 0.5°C)	•	•	•
Low water -10°C	•	•	•
Low ambient -10°C with fan step control	•	•	•
Antifreeze heating	•	•	•
Non ferrous hydraulic circuit	•	•	•

Options & Standard Features -

Water Cooled

	ICE076	ICE090	ICE116	ICE150	ICE183	ICE230
Water tank	standard	standard	standard	standard	standard	standard
P30 (3 bar pump)	standard	standard	standard	standard	standard	standard
No pump	•	•	•	•	•	•
P50 (5 bar pump)	•	•	•	•	•	•
P15 (1.5 bar pump)	•	•	•	•	•	•
Dual pump P30 (3 bar pump)	•	•	•	•	•	•
Close control (+/- 0.5°C)	•	•	•	•	•	•
Low water -10°C	•	•	•	•	•	•
Low ambient -10°C with fan step control	•	•	•			
Antifreeze heating	•	•	•	•	•	•
Non ferrous hydraulic circuit	•	•	•	•	•	•

Hyperchill Available Kits and Accessories

	ICE076 - ICE090 PCW080 - PCW330	ICE150 - ICE230 PCW420 - PCW650	ICE310	ICE360
Fill kit - ambient manual	398H785054	398H785053		
Fill kit - ambient automatic	398H785051	398H785052		
Fill kit - pressurised automatic with expansion tank	398H785055	398H785055		
Remote control - base	398H785010	398H785010	398H785010	398H785010
Remote control - advanced	398H785283	398H785283	398H785283	398H785283
Control panel cover	398H785089	398H785089	398H785089	398H785089
Manual external bypass	on request	on request		

Hyperchill Industrial Water Chiller (60Hz UL)

Part Number Breakdown / Product Key

Product Code	Model	Condenser Section	Power Supply	Pumps	Hydraulic Circuit	Control Water Temp.	Low Ambient	Low Water	Options
PCW	080	A	460360	1P30	FF	C	LA	LW	0
	110	B		1P50	NF	0	L2	00	M
	130			0000			00		
	160		460360 = 460V/3Ph/60Hz		C = Close Control +/- 0.5°C Standard Control		LW = Low Water 00 = No Low Water		
	210								
	260								
	330								
	420								
PCW = Hyperchill 60Hz		A = Air Axial		1P30 = Single Pump 3 bar		FF = With Tank		LA = Low Ambient -10°C (Fan Step Control)	
		B = BioEnergy & Aggressive Ambients		P5 = Single Pump 5 bar		NF = Non Ferrous		L2 = Low Ambient -20°C	
		510		0000 = No Pump		00 = No Low Ambient		0 = No options	
		650						M = Modbus	

Standard Part Numbers - Air Cooled with Axial Fans

Hyperchill Air Cooled with axial fans	
PCW080	PCW080A4603601P30FF000000
PCW110	PCW110A4603601P30FF000000
PCW130	PCW130A4603601P30FF000000
PCW160	PCW160A4603601P30FF000000
PCW210	PCW210A4603601P30FF000000
PCW260	PCW260A4603601P30FF000000
PCW330	PCW330A4603601P30FF000000
PCW420	PCW420A4603601P30FF000000
PCW510	PCW510A4603601P30FF000000
PCW650	PCW650A4603601P30FF000000

Options & Standard Features - Air Cooled with Axial Fans

	PCW080	PCW110	PCW130	PCW160	PCW210	PCW260	PCW330	PCW420	PCW510	PCW650
Water tank	standard									
P30 (3 bar pump)	standard									
No pump	•	•	•	•	•	•	•	•	•	•
P50 (5 bar pump)	•	•	•	•	•	•	•	•	•	•
Close control (+/- 0.5°C)	•	•	•	•	•	•	•	•	•	•
Low water -10°C	•	•	•	•	•	•	•	•	•	•
Low ambient -10°C with fan step control	•	•	•	•	•	•	•	•	•	•
Low ambient -20°C with fan speed control, crankcase heater and electrical panel heater	•	•	•	•	•	•	•	•	•	•
BioEnergy & aggressive ambients protection	•	•	•	•	•	•	•	•	•	•
Non ferrous hydraulic circuit	•	•	•	•	•	•	•	•	•	•
MODBUS	•	•	•	•	•	•	•	•	•	•

Hyperchill Laser Industrial Process Chiller

Technical Data

Model HLS		076	090	116
Cooling capacity ¹	kW	76.0	90.2	115.5
Compressor abs. power ¹	kW	15.4	20.3	24.9
Cooling capacity ²	kW	67.1	79.9	103.3
Compressor abs. power ²	kW	18.7	24.2	29.9
Power supply	V/ph/Hz	400/3/50 no neutral		
Protection index		54		
Refrigerant		R407C		

Compressors

Type		Hermetic scroll		
Compressors/circuits		2/2		
Max abs. power ¹ comp.	kW	11.1	13.7	16.8

Axial fans

Quantity	n°	3		
Max abs. power ¹ fan	kW	0.78	0.78	0.78
Air flow	m ³ /h	25500	25000	26400

1) At water inlet/outlet temperature = 20/15°C, glycol 0 %, ambient temperature 25°C.

2) At water inlet/outlet temperature = 25/20°C, glycol 0 %, ambient temperature 35°C.

3) Referred to free field conditions at a distance of 10m from unit, measured on condenser side, 1m from ground.

Pump P30

Max abs.power	kW	2.5	2.7	2.7
Water flow (nom/max) ¹	m ³ /h	13/31	15/27	20/27
Head pressure (nom/min) ¹	m H ₂ O	23/13	28/16	25/16

Pump P50

Max abs.power	kW	4.5	4.5	4.5
Water flow (nom/max) ¹	m ³ /h	13.1/27	15.5/27	19.8/27
Head pressure (nom/min) ¹	m H ₂ O	30/18	28/18	25/18

Weights & Dimensions

Width	mm	898	898	898
Depth	mm	2200	2200	2200
Height	mm	1984	1984	1984
Connections in/out	in	2"	2"	2"
Tank capacity	l	300	300	300
Weight (axial)	kg	750	870	960

Noise level


Sound pressure (axial) ³	dB(A)	58	58	58
-------------------------------------	-------	----	----	----

As the manufacturer of process chillers delivering water at a design temperature of 15°C, Parker Hannifin Manufacturing s.r.l., Gas Separation and Filtration Division EMEA, declares that Parker chillers are exempt from Ecodesign EU regulation 2016/2281.

Correction Factors

A) Ambient Temperature		°C	5	10	15	20	25	30	35	40	45
B) Water Outlet Temperature		°C	5	10	15	20	25	30	35	40	45
C) Glycol (by weight)		%	0	10	20	30	40	50	60	70	80
Correction Factor (f1)			1.05	1.05	1.05	1.05	1	0.95	0.89	0.83	0.77
Correction Factor (f2)			0.72	0.88	1	1	1	1	1	1	1
Correction Factor (f3)			1	0.99	0.98	0.97	0.96	0.95	0.94	0.93	0.92

To obtain the required cooling capacity multiply the value at nominal conditions by the above correction factors (i.e. cooling capacity = $P \times f1 \times f2 \times f3$, where P is the cooling capacity at conditions (1). Hyperchill Laser, in its standard configuration, can operate up to ambient temperatures of max 48 °C for ICEP models, 45°C for HLS models and min 5 °C and water temperatures of max 30 °C inlet and min. 0°C outlet. The above correction factors are approximative: for a precise selection always refer to the software selection program

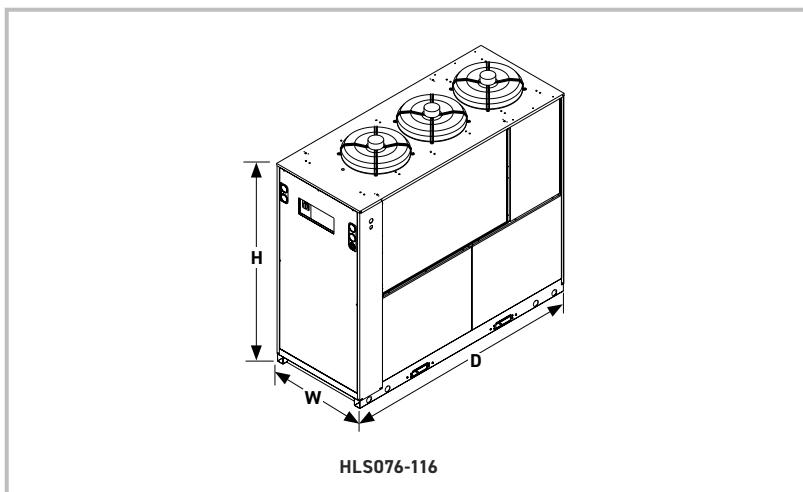

Part Number Breakdown / Product Key

Product Code	Model	Condenser Section	Power Supply	Pumps	Hydraulic Circuit	Control Water Temp.	Low Ambient	Low Water	Antifreeze
HLS	076	A	400350	1P30	SS	C	LA	00	A
	090			1P50					0
	116			0000		C = Close Control +/- 0.5°C		00 = No Low Water	
400350 = 400V/3Ph/50Hz				SS = Stainless Steel With Tank				LA = Low Ambient -10°C (Fan Step Control)	
HLS = Hyperchill Laser		A = Air Cooled		1P30 = Single Pump 3 bar		SS = Stainless Steel With Tank		LA = Low Ambient -10°C (Fan Step Control)	
								00 = No Low Water	
								A = Antifreeze	
								0 = No Antifreeze	

Standard Part Numbers - Air Cooled with Axial Fans

Hyperchill Laser Air Cooled with axial fans, non ferrous hydraulic circuit, close control, low ambient temperature -10°C, manual fill kit.			
HLS076		HLS076A4003501P30SSCLA000	
HLS090		HLS090A4003501P30SSCLA000	
HLS116		HLS116A4003501P30SSCLA000	

Options & Standard Features - Air Cooled with Axial Fans

	HLS076	HLS090	HLS116
Close control (+/- 0.5°C)	standard	standard	standard
P30 (3 bar pump)	standard	standard	standard
Low ambient -10°C	standard	standard	standard
Stainless steel with tank	standard	standard	standard
Antifreeze heating	•	•	•
No pump	•	•	•
P50 (5 bar pump)	•	•	•

Hyperchill Laser Available Kits and Accessories

	HLS076	HLS090	HLS116
Fill kit ambient manual	standard	standard	standard
Remote control base	398H785010	398H785010	398H785010
Closed circuit	398H785011	398H785011	398H785011
Control panel cover	398H785089	398H785089	398H785089
Hydraulic bypass	on request	on request	on request
Automatic check valves	on request	on request	on request

Industrial Nitrogen Gas Applications

There are thousands of applications for industrial gases. Nitrogen is generally used for three main functions:

- It prevents microbial growth or acts as a filler gas in food applications
- It prevents slow oxidization of products such as chemicals and metals during processing or heating
- It prevents rapid oxidization of products that are flammable or explosive

Pharmaceutical

Whether in primary or secondary pharmaceutical product manufacture or as a centralised QA laboratory supply; within research establishments or universities and colleges, Parker can offer a solution to suit the critical demands of this industry sector.

For blanketing of pharmaceutical product ingredients and pressure transfer within reactor vessels, to micronising powders to prevent oxidisation or explosion, Parker nitrogen generators can cut costs, reduce risk and improve productivity.

Centralised laboratory systems remove the need to have high pressure cylinders within the working environment and the possibility of running out of gas during a QA analysis procedure. Parker nitrogen gas generators are typically used for analytical equipment such as LC/MS, GC, reaction blanketing within fume cupboards, solvent evaporation, ICP, ELSD, NMR and circular dichroism.

Food and Beverage

Most food products start to deteriorate from the moment they are harvested or prepared for packaging, being under attack from a multitude of spoilage mechanisms. By flushing, storing and/or packing with nitrogen, oxygen that many of these micro-organisms need in order to survive and multiply, is removed and the spoilage process is significantly reduced.

Prepared salads and vegetables, fresh chilled ready meals, meat, poultry, fish, dairy produce (including cheese), breads, coffee as well as snack foods such as potato chips and nuts can all benefit from 'modified atmosphere packaging' (or MAP as it is often referred to). By using nitrogen gas from a Parker generator, the product shelf life is increased and the appearance and quite often taste, is also improved.

Nitrogen is also used for 'controlled atmosphere storage' of fresh fruits and vegetables, sparging and blanketing food oils as well as bulk powders, cereals and liquid ingredients.

Alcoholic and non-alcoholic drinks and ingredients can suffer similar spoilage mechanisms to food, however one of the most significant threats to product quality is oxidisation which adversely affects product taste. Beer and wine can absorb unwanted dissolved oxygen throughout the production process. Oxygen can also reduce the effectiveness of natural or added vitamin C which maybe used in fruit juices.

Nitrogen gas generators provide an ideal cost effective solution for all of the processes involved in beverage production.

Lasers

Laser Cutting

By far the largest use of nitrogen gas within this industry sector is for laser cutting. Nitrogen gas is used as an 'assist gas' to prevent oxidisation or discolouration and to blow away the molten material from the cut edge.

It is also used in certain types of laser cutting machine as a 'purge gas' to ensure the laser beam guide path from the resonator (where

the beam is generated), to the cutting head, is free of contamination that could otherwise affect the power or alter the shape of the beam.

Laser Sintering

Laser sintering or rapid prototyping uses a laser to form a solid 3D structure within a plastic powder material. Complex shapes and patterns can be constructed and modelled with ease. Nitrogen is used to blanket and prevent oxidisation of the powder material while it melts and solidifies to shape under the heat generated by the laser beam.

Laser Ablation

Nitrogen is used to expel fumes and blanket delicate electronic circuits where a laser beam is used to erode pathways on micro printed circuit boards.

Laser Eye Surgery

Nitrogen is used as a beam purge and pneumatics gas on Eximer laser machines which are used in the corrective treatment of eyesight defects.

Heat Treatment

Nitrogen gas is commonly used to exclude oxygen from heat treatment furnaces and ovens. Parker can supply nitrogen gas generation systems to replace expensive bulk vessel liquid supplies for many heat treatment processes.

Typical applications include:

- Belt furnaces
- Batch furnaces
- Vacuum ovens
- Brazing
- Carburising
- Tempering
- Annealing
- Gas quenching
- Neutral hardening
- Normalising
- Sintering

Fire Prevention and Archive Protection

From the preservation of treasures for the generations after us, to preventing essential data destruction due to fire, Parker nitrogen generators provide a unique solution.

Oxygen depleted air can be pumped into buildings that house treasures and archives or computer stored data to help prevent total loss caused by fire. Museum pieces, paintings, artefacts, furniture and valuable fabrics can all be protected.

In general, only a modest reduction in normal ambient oxygen levels is enough to prevent fire. At 16% oxygen content, archives are protected whilst intermittent human exposure to these levels will have no adverse effects.

What Nitrogen Quality Do I Need?

Traditional gas companies generally provide gas that is of high purity regardless of whether the application or process needs it. This is as a result of the ASU manufacturing process. Typically cylinder and liquid nitrogen has a maximum remaining oxygen content of between 5ppm to 20ppm v/v.

The majority of applications do not need such high purity gas and the benefit of using a higher oxygen content Parker generated gas is that less energy is used to produce it, so the unit gas cost will be more competitive.

For example using nitrogen with a maximum remaining oxygen content of 5% uses 5 times less energy to generate than with a maximum remaining oxygen content of 10ppm.

Providing customers with ultra-high purity nitrogen in all instances is an unnecessary waste of money and energy.

What do we mean by 'purity'?

By purity Parker means the maximum remaining oxygen content in the output nitrogen gas. Parker nitrogen technology when combined with Parker compressed air pre-treatment, guarantees the nitrogen gas to be commercially sterile, oil-free, dry and particulate free. (Within the specifications defined in the product information data contained in this catalogue.)


The maximum remaining oxygen content required will vary with every application.

Maximum cost and energy savings = maximum oxygen level permissible

High Purity 10 ppm to 1000ppm (99.999% to 99.9%)	Mid Purity 0.1% to 1% (99.9% to 99%)	Low Purity 1% to 5% (99% to 95%)
Laser cutting 50ppm to 500ppm	Brazing 0.5%	Fire prevention 5%
Heat treatment 10ppm to 1000ppm	Food MAP 0.1% to 1%	Pigging 5%
Electronics soldering 50ppm to 500ppm	Food processing 0.1% to 1%	Explosion prevention 2% to 5%
Pharmaceutical 10ppm to 5000ppm	Beer dispense 0.5%	Autoclaves 5%
	Wine blanketing 0.5%	Pressure testing 5%
	Oil sparging 0.5%	Gas seal blanketing 5%
		Laser sintering 2%
		Dry boxes 2%
		Chemical blanketing 1% to 5%


Typical PSA Installations

Layout for standard industrial applications

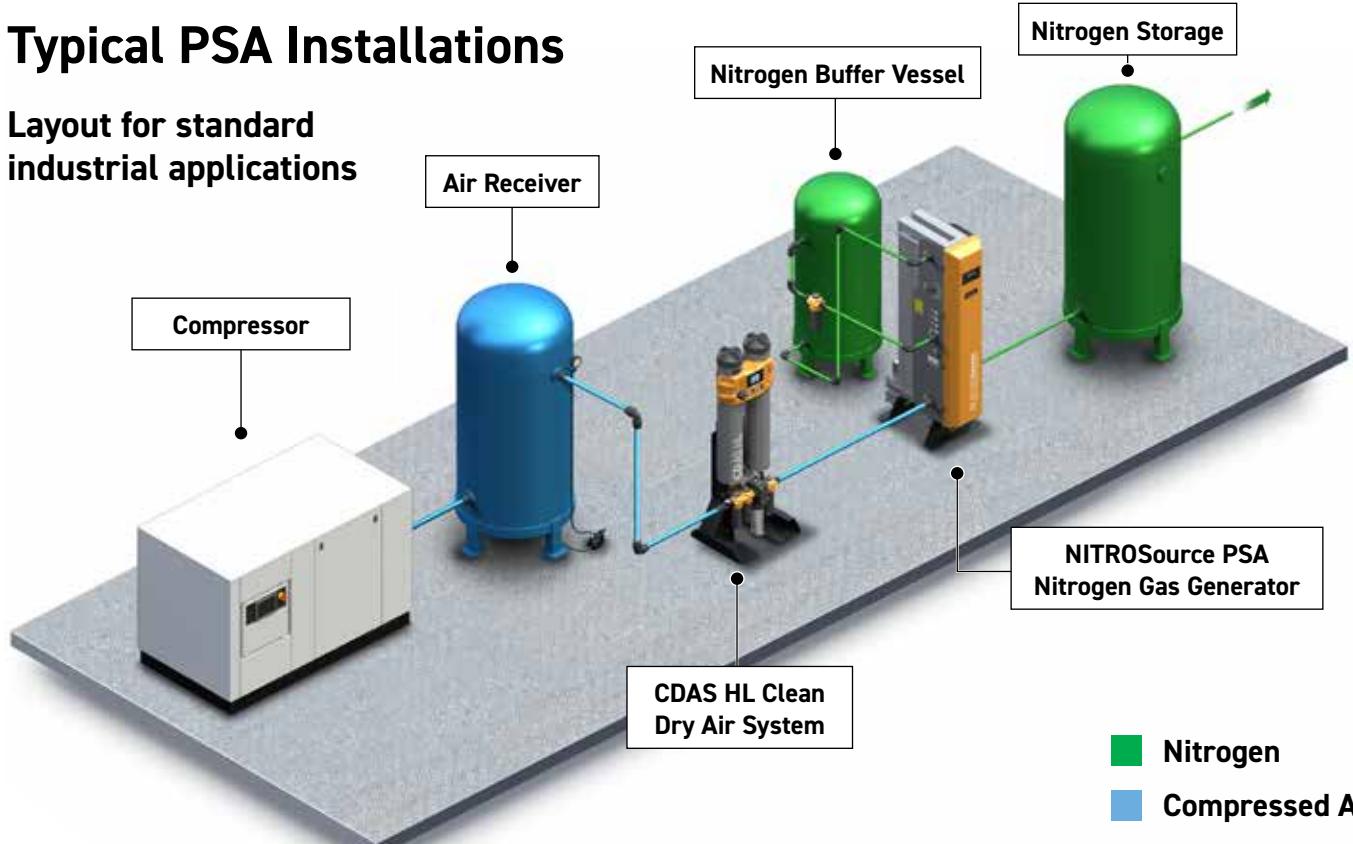


Nitrogen Gas Generation - Typical PSA Installations


Layout for standard industrial applications

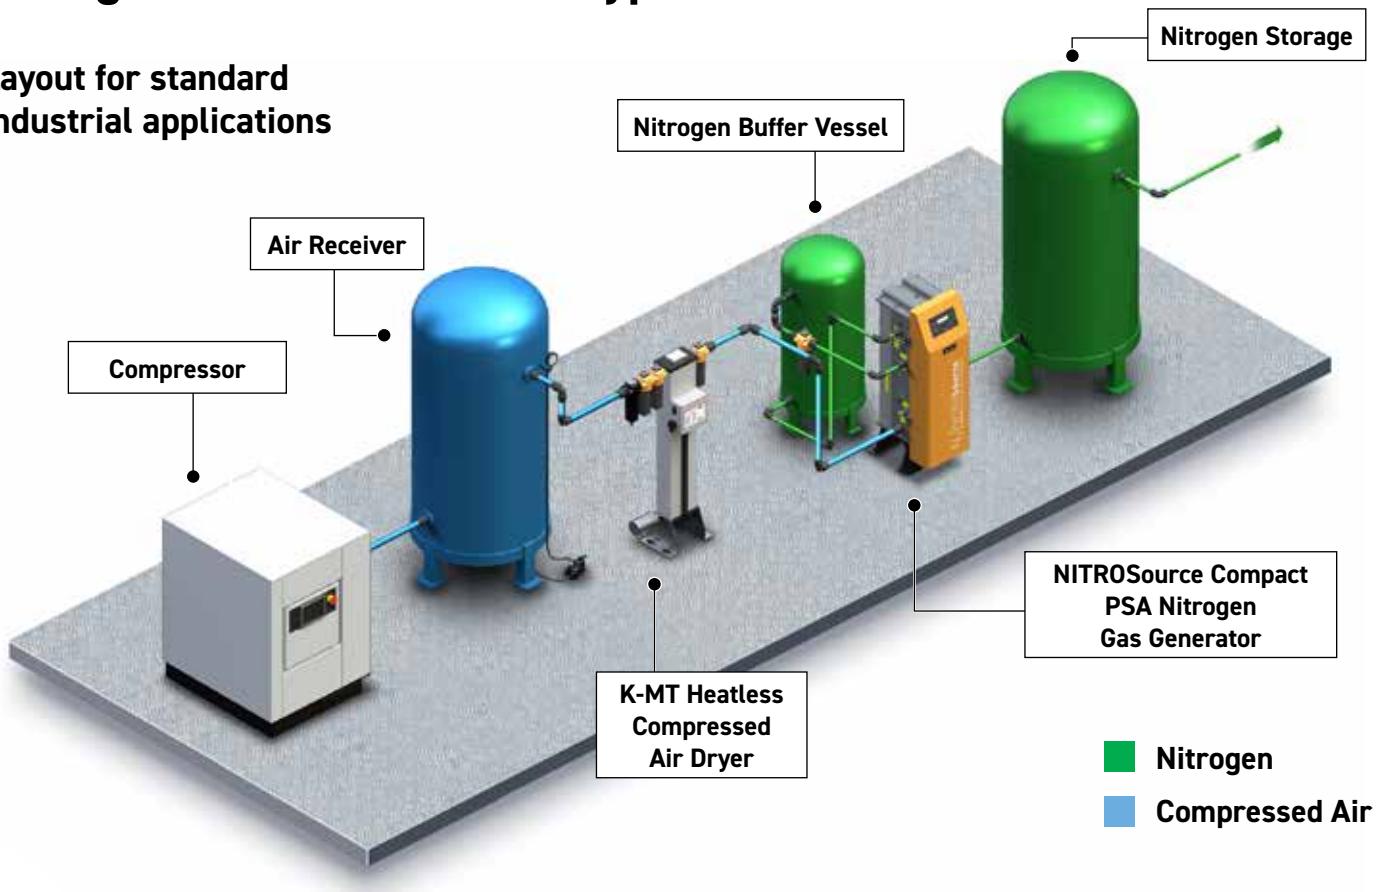


Layout for food and pharmaceutical applications with sterile gas filtration

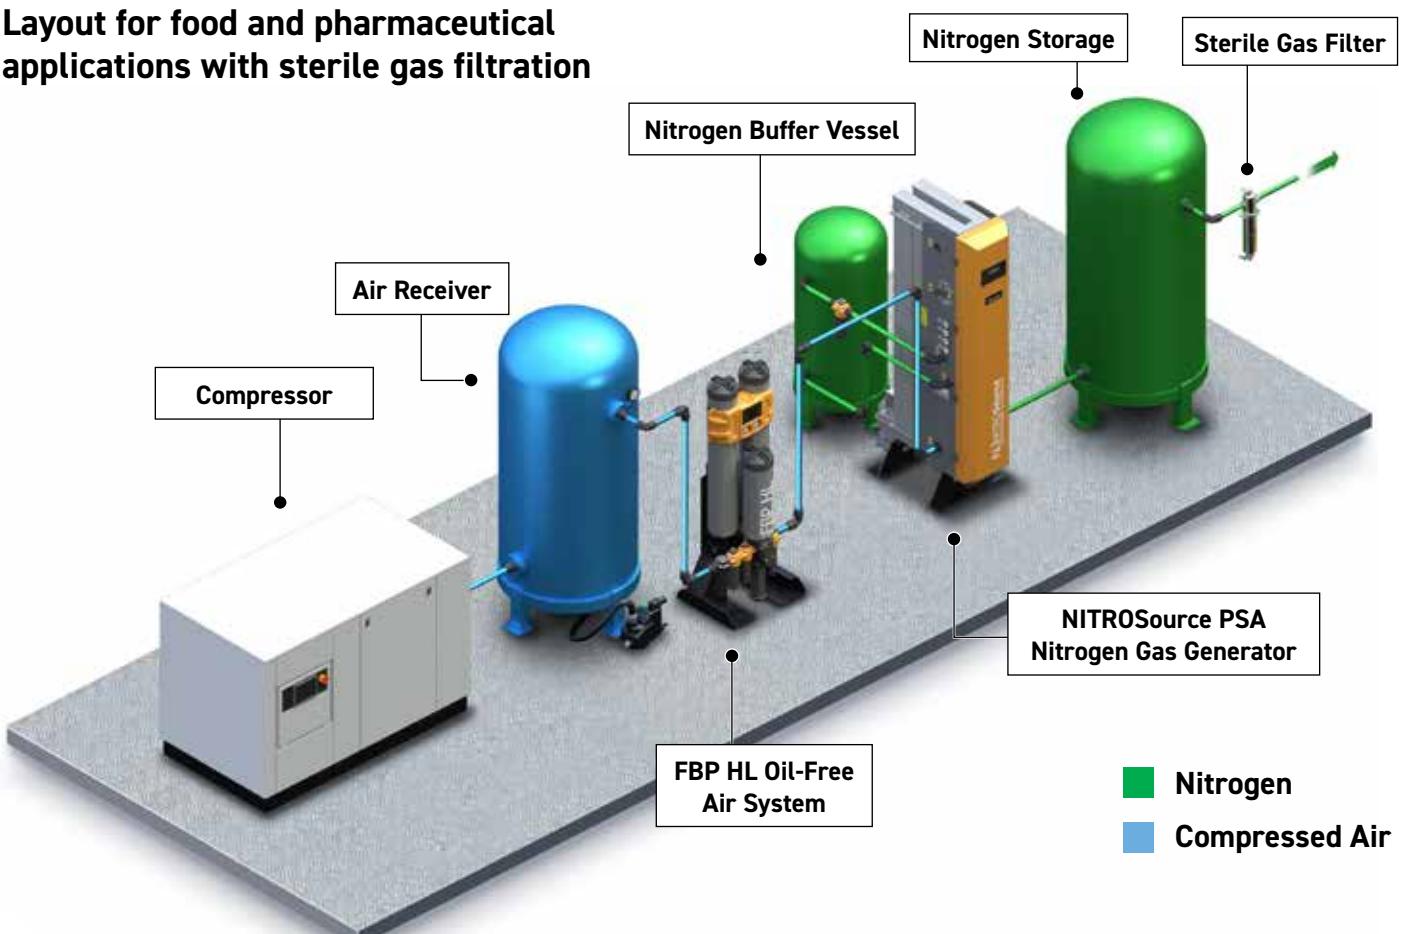

**Layout for intermediate pressure
40 barg applications**

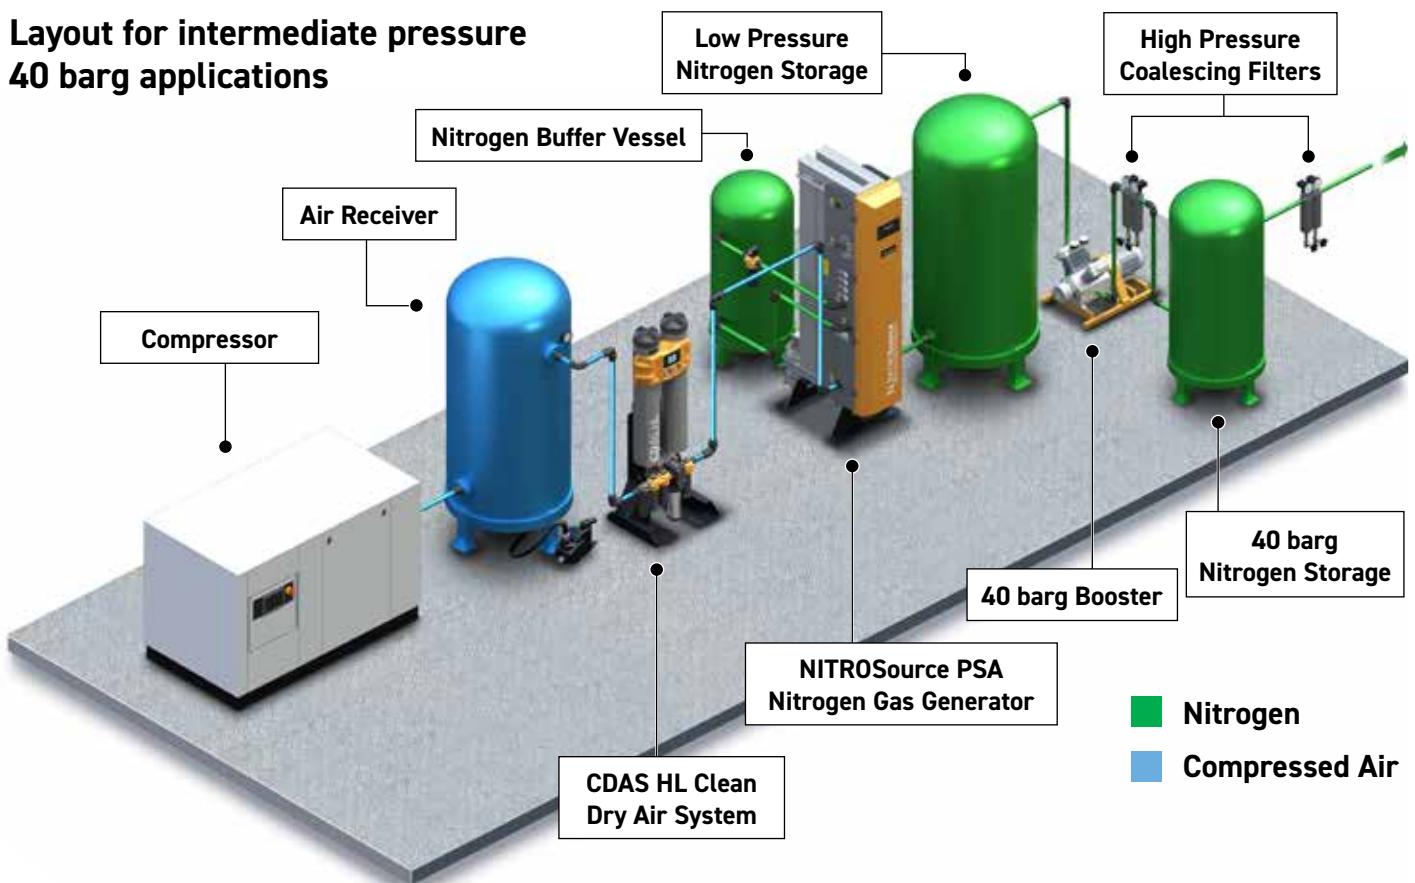

**Layout for high pressure
350 barg applications**

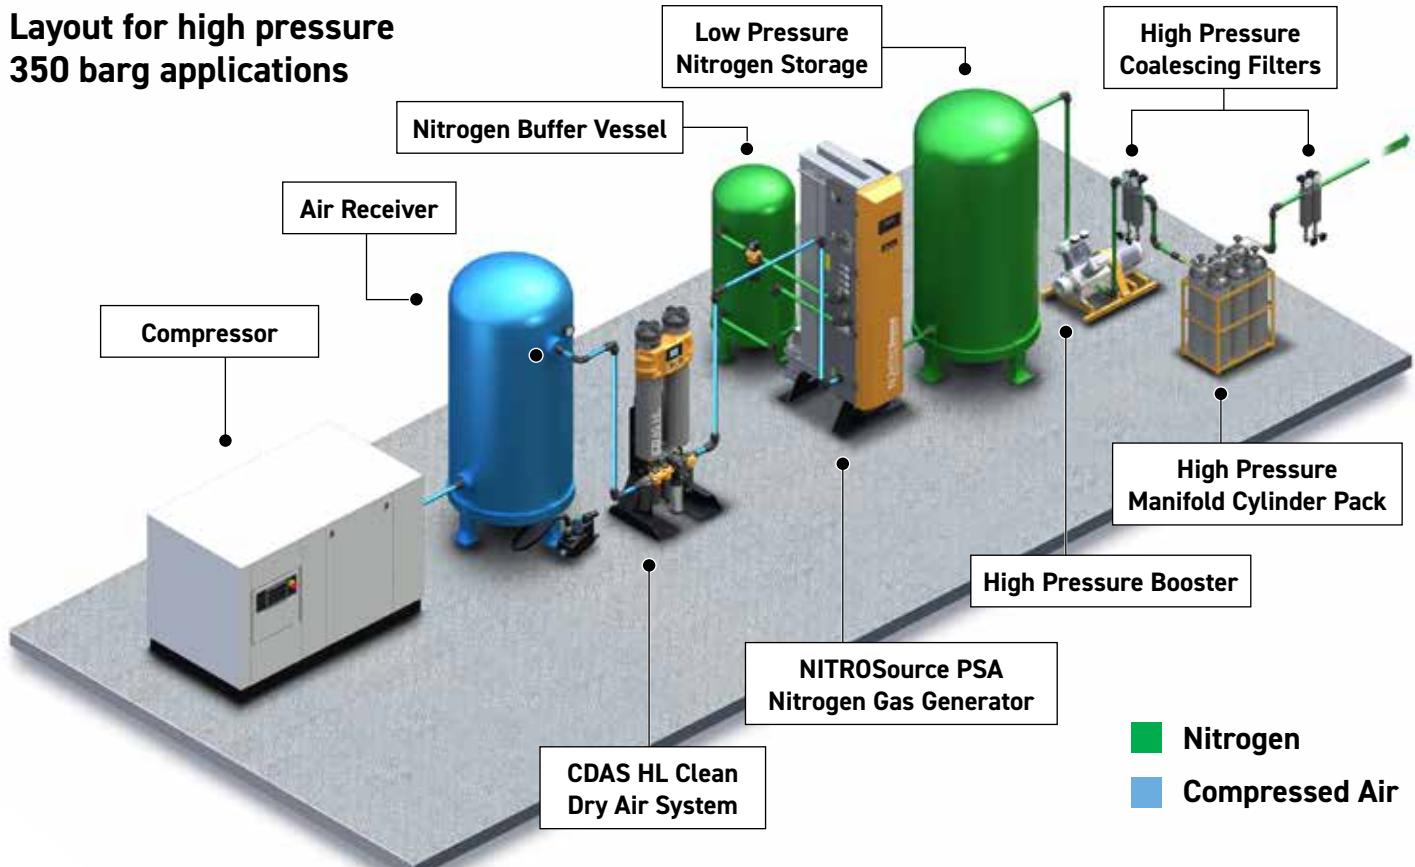


Nitrogen Gas Generation - Typical Multi-bank Installations


Unlike traditional designs, NITROSource PSA models can be multi-banked to provide extra nitrogen capacity should demand increase in the future. There is no need to replace the generator with a larger unit, additional capacity can be covered by simply adding extra bank(s).

2 x NITROSource with individual compressed air treatment (2 x OFAS)


OFAS required for ambient conditions >35°C

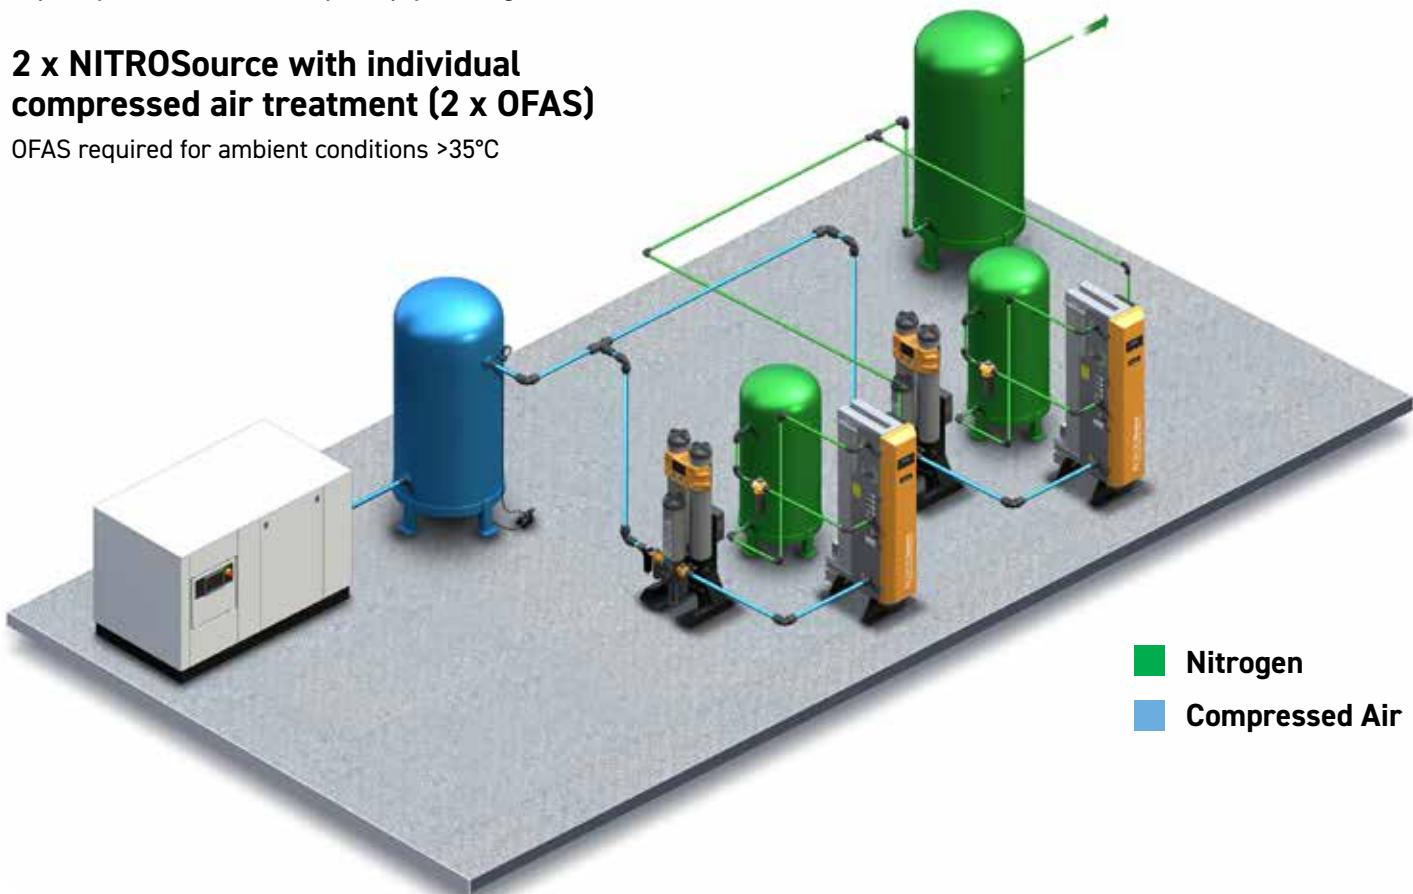


4 x NITROSource with individual compressed air treatment (4 x CDAS)

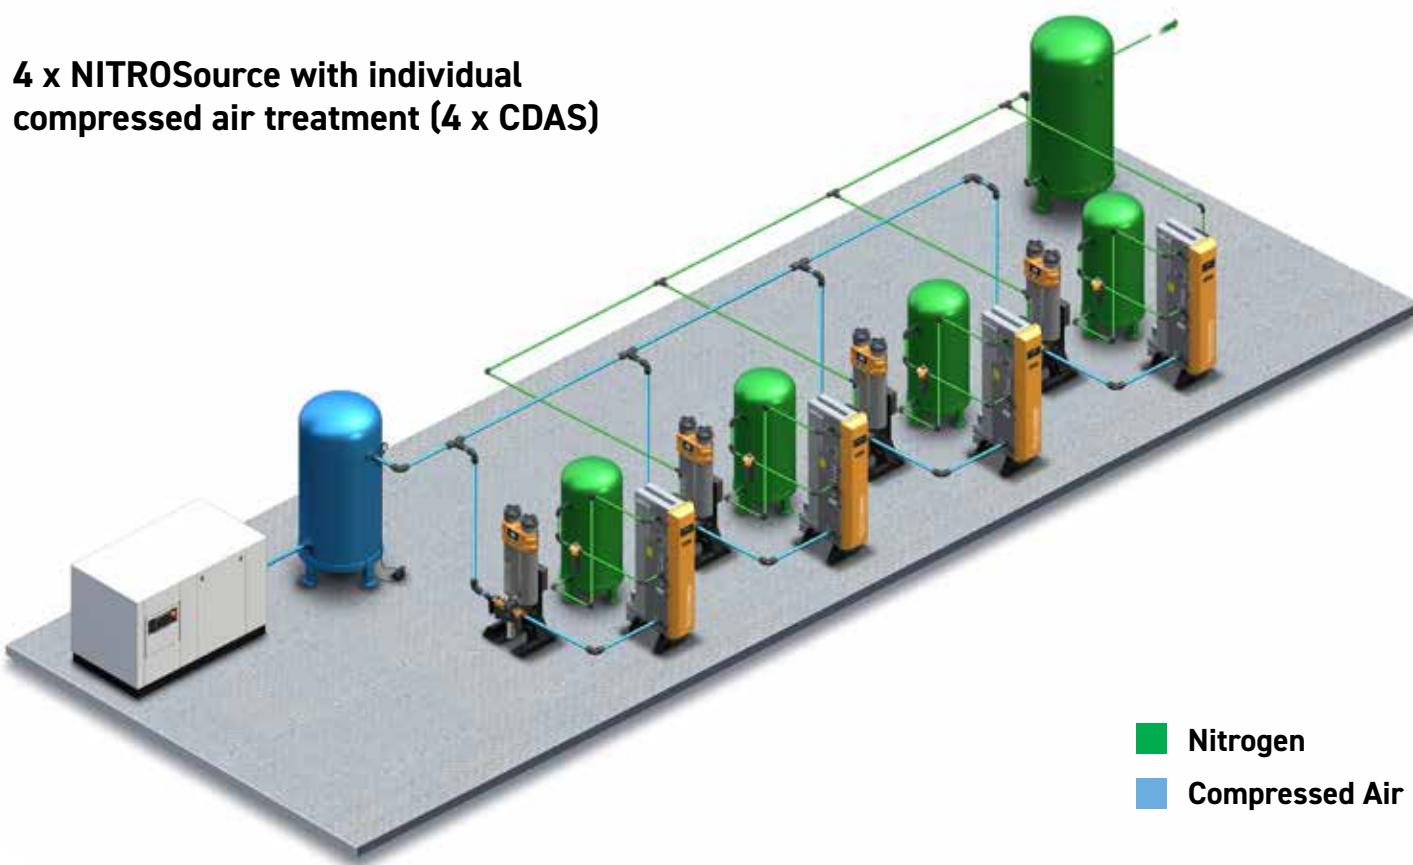

4 x NITROSource with joint compressed air treatment (1 x PSE and 1 x OVR)

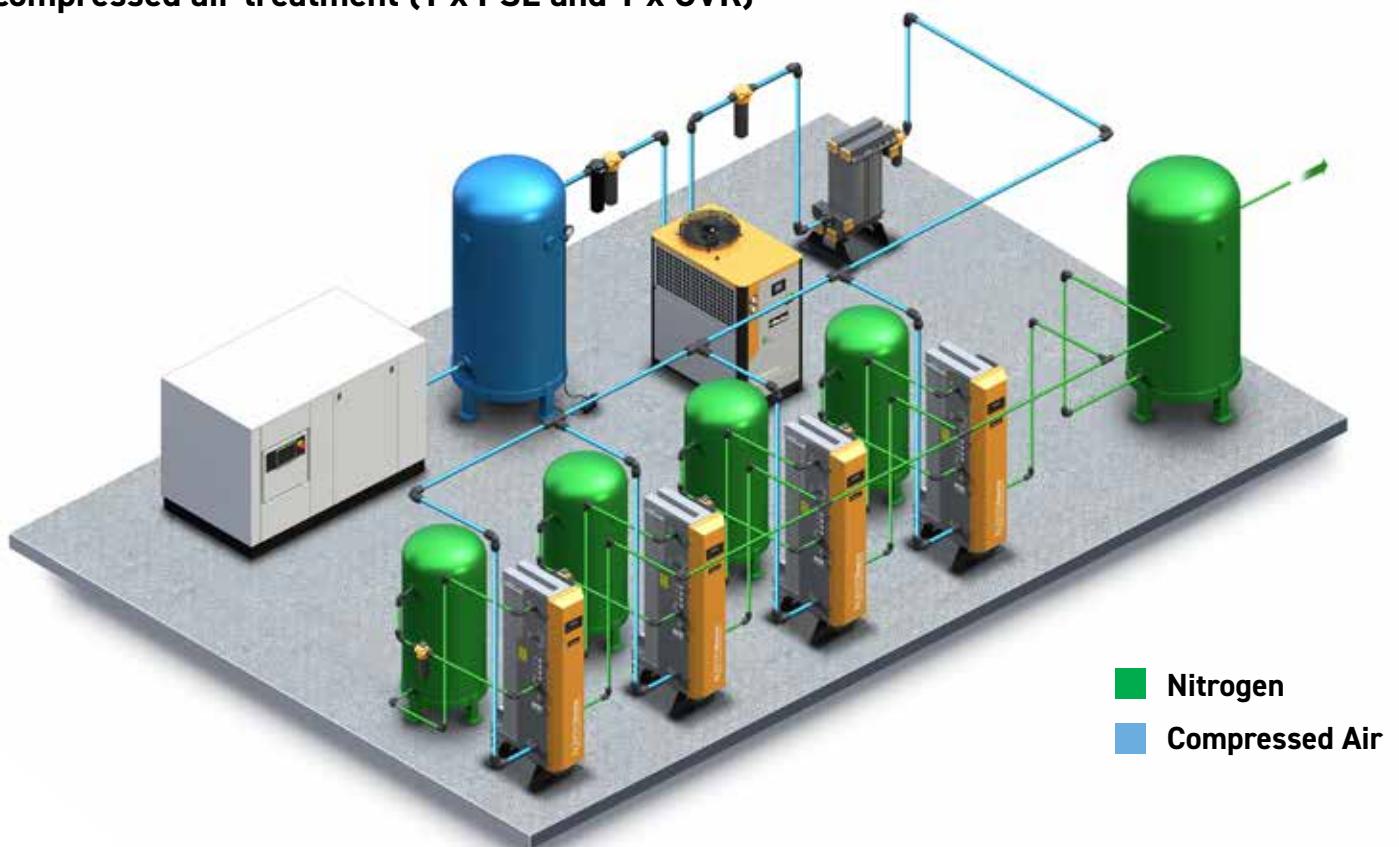

5 x NITROSource with joint compressed air treatment (1 x MX)

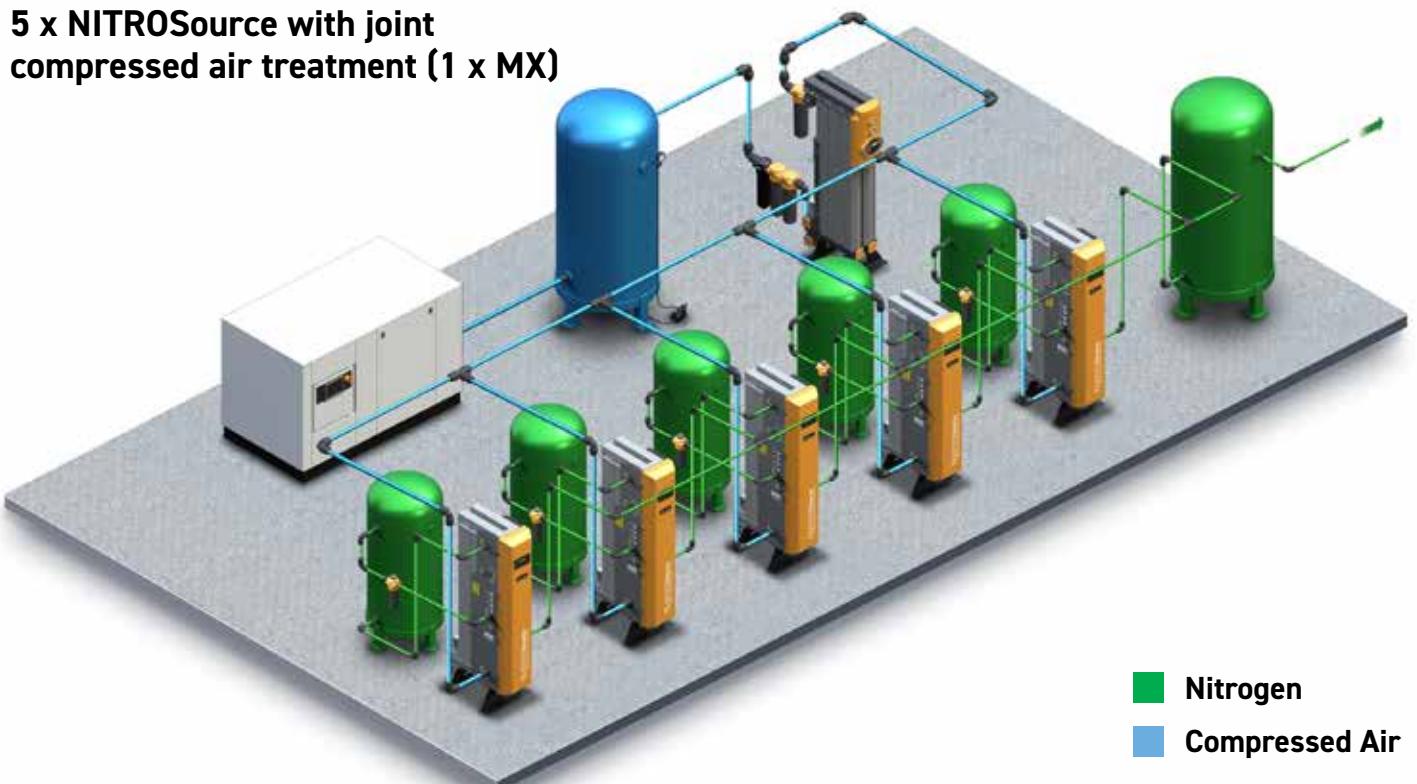

NITROSource PSA Nitrogen Gas Generator

Technical Data

Model	Nitrogen Flow Rates m³/hr vs Purity (Oxygen Content)													
	Parts Per Million (ppm)						Percent (%)							
	5	10	50	100	250	500	0.10	0.40	0.50	1	2	3	4	5
N2-20P	3.5	4.5	6.7	8.0	9.7	11.1	12.4	16.7	17.7	21.3	25.3	29.8	30.9	33.7
N2-25P	5.3	6.8	10.1	12.0	14.6	16.7	18.6	25.1	26.6	32.0	38.0	44.7	46.4	50.6
N2-35P	7.0	9.0	13.4	16.0	19.4	22.2	24.8	33.4	35.4	42.6	50.6	59.6	61.8	67.4
N2-45P	8.8	11.3	16.8	20.0	24.3	27.8	31.0	41.8	44.3	53.3	63.3	74.5	77.3	84.3
N2-55P	10.5	13.5	20.1	24.0	29.1	33.3	37.2	50.1	53.1	63.9	75.9	89.4	92.7	101.1
N2-60P	11.6	15.0	22.3	26.6	32.3	36.9	41.2	55.5	58.9	70.8	84.1	99.1	102.7	112.1
N2-65P	13.3	17.1	25.5	30.4	36.9	42.2	47.1	63.5	67.3	80.9	96.1	113.2	117.4	128.1
N2-75P	14.5	18.6	27.7	33.1	40.2	46.0	51.3	69.1	73.3	88.2	104.7	123.4	127.9	139.5
N2-80P	16.1	20.7	30.8	36.8	44.6	51.1	57.0	76.8	81.4	98.0	116.4	137.1	142.1	155.0

Performance data is based on 7 bar g air inlet pressure and 20°C - 25°C ambient temperature. Consult Parker for performance under specific conditions.

m³ reference standard 20°C, 1013 millibar(a), 0% relative water vapour pressure.

Inlet Parameters

Inlet Air Quality	ISO 8573-1: 2010 Class 2.2.2 (2.2.1 with high oil vapour content)
Inlet Air Pressure Range	5 - 13 bar g (72.5 - 217 psi g)

Electrical Parameters

Generator Supply	100 - 240 +/- 10% Vac 50/60Hz
Generator Power	55 W
Fuse	3.15 A (Anti Surge (T), 250v, 5 x 20mm HBC, Breaking Capacity 1500A @ 250v, IEC 60127, UL R/C Fuse)

Environmental Parameters

Ambient Temperature	5 - 50°C (41 - 122°F)
Humidity	50% @ 40°C (80% @ MAX @ 31°C)
IP Rating	IP20 / NEMA 1
Pollution Degree	2
Installation Category	II
Altitude	< 2000 m (6562 ft)
Noise	<80 dB (A)

Port Connections


Air Inlet	G1
N2 Outlet to Buffer	G1
N2 Inlet from Buffer	G½
N2 Outlet	G½

Part Number Breakdown / Product Key

Product Code	-	Model	Technology	O₂ Purity	Flow @ 5 bar g	Energy Saving Technology (EST)
N2	-	20	P	X	L	N
		25		A	M	Y
		35		B	H	
		45				
		60				
		55				
		65				
		75				
		80				
X = Ultra High Purity (<10ppm) A = High Purity (ppm) B = Low Purity (%)						
N = Does Not Include EST Y = Includes EST						
L = Low Flow (0-60 m³/hr) M = Medium Flow (60-120 m³/hr) H = High Flow (120-300 m³/hr)						
N2 = NITROSource						
P = Pressure Swing Adsorption (PSA)						

Buffer Vessel Sizes

Model	Size (litres)
N2-20P	250
N2-25P	500
N2-35P	500
N2-45P	750
N2-55P	750
N2-60P	750
N2-65P	1000
N2-75P	1000
N2-80P	1000

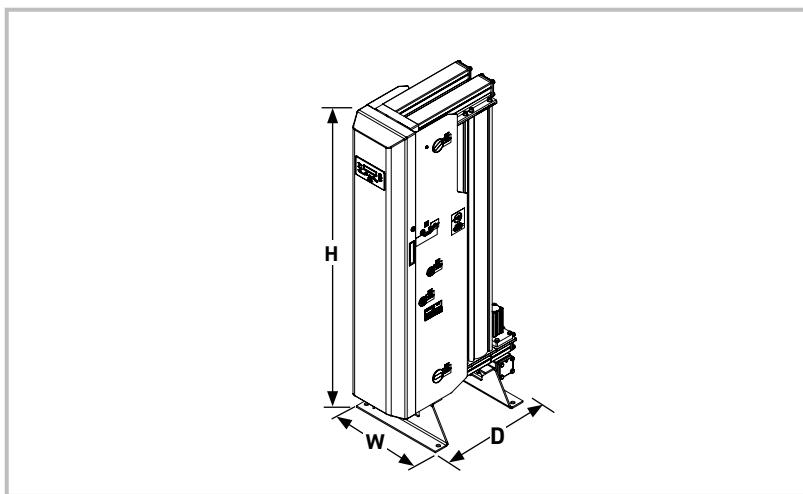

Weights and Dimensions

Model	Unpacked								Packed							
	Height (H)		Width (W)		Depth (D)		Weight		Height		Width		Depth		Weight	
	mm	ins	mm	ins	mm	ins	kg	lbs	mm	ins	mm	ins	mm	ins	kg	lbs
N2-20P	1894	74.6	550	21.7	881	34.7	299	658	729	28.7	2000	78.7	1090	42.9	398.4	876
N2-25P					1050	41.3	384	845					1260	49.6	495.4	1090
N2-35P					1219	48.0	469	1032					1430	56.3	580.4	1277
N2-45P					1388	54.6	553	1217					1600	63.0	686.4	1510
N2-55P					1557	61.3	638	1404	832	32.8	2100	78.7	1770	69.7	782.4	1721
N2-60P					1726	68.0	722	1588					1935	76.2	897.4	1974
N2-65P					1895	74.6	807	1775					2100	82.7	997.4	2194
N2-75P					2064	81.3	892	1962					2275	89.6	1093.4	2405
N2-80P					2233	87.9	976	2147					2445	96.3	1186.4	2610

Preventative Maintenance Kits

	High Purity Generators (ppm)				Low Purity Generators (%)			
Model	Without EST (Model Nos. N2XXPAXN)		With EST (Model Nos. N2XXPAXY)		Without EST (Model Nos. N2XXPBXN)		With EST (Model Nos. N2XXPBXY)	
Kit Part Numbers	M12.NONEST.0001 M24.PPM.0002 M36.STD.0001 M60.STD.0001		M12.EST.0001 M24.PPM.0002 M36.STD.0001 M60.STD.0001		M12.NONEST.0001 M24.PCT.0002 M36.STD.0001 M60.STD.0001		M12.EST.0001 M24.PCT.0002 M36.STD.0001 M60.STD.0001	

Kit Contents

Part Number	Description / Service Interval	Contents
M12.NONEST.0001	12 Month Non EST Service Kit (Every 12 Months)	Exhaust Silencer P025AO Dust Filter Element
M12.EST.0001	12 Month EST Service Kit (Every 12 Months)	Exhaust Silencer P025AO Dust Filter Element In-Line Filter
M24.PPM.0002	24 Month PPM Service Kit (Every 24 Months)	PPM Cell c/w Wiring
M24.PCT.0002	24 Month Percentage Service Kit (Every 24 Months)	% Cell c/w Wiring
M36.STD.0001	36 Month Standard Service Kit (Every 36 Months)	8 Bank Solenoid Valve
M60.STD.0001	60 Month Standard Service Kit (Every 24 Months)	40 x 25mm Stroke Cylinders (x6) Over Molded Valve Discs and Guides (x6) 50 x 100mm Stroke Cylinders (x2) Valve Discs (x2 Sets) Valve Bonnets (x2) Assorted O-Rings Fixing Screws

NITROSource Compact PSA Nitrogen Gas Generator

Please contact Parker for NITROSource Compact performance data or visit parker.com/gsfe.

Inlet Parameters

Inlet Air Quality	ISO 8573-1: 2010 Class 2.2.2 (2.2.1 with high oil vapour content)
Inlet Air Pressure Range	6 - 10 bar g (87 - 145 psi g)

Electrical Parameters

Generator Supply	100 - 240 +/- 10% Vac 50/60Hz
Generator Power	55 W
Fuse	3.15 A (Anti Surge (T), 250v, 5 x 20mm HBC, Breaking Capacity 1500A @ 250v, IEC 60127, UL R/C Fuse)

Environmental Parameters

Ambient Temperature	5 - 50°C (41 - 122°F)
Humidity	50% @ 40°C (80% @ MAX @ 31°C)
IP Rating	IP20 / NEMA 1
Pollution Degree	2
Installation Category	II
Altitude	< 2000 m (6562 ft)
Noise	<80 dB (A)

Port Connections

Air Inlet	G1
N2 Outlet to Buffer	G1
N2 Inlet from Buffer	G½
N2 Outlet	G½


Flowrate

Model	Units	10PPM	50PPM	100PPM	250PPM	500PPM	0.1%	0.5%	1%	2%	3%	4%	5%
N2C-2	m³/hr	0.81	1.24	1.54	1.77	2.09	2.48	3.69	4.39	6.11	7.73	9.13	10.29
	cfm	0.5	0.7	0.9	1.0	1.2	1.5	2.2	2.6	3.6	4.5	5.4	6.1
N2C-4	m³/hr	1.73	2.38	2.94	3.52	4.21	4.96	7.58	9.12	12.95	15.89	18.38	20.57
	cfm	1.0	1.4	1.7	2.1	2.5	2.9	4.5	5.4	7.6	9.4	10.8	12.1
N2C-6	m³/hr	2.41	3.91	4.46	5.66	6.50	7.59	11.06	13.32	18.64	22.68	26.06	29.04
	cfm	1.4	2.3	2.6	3.3	3.8	4.5	6.5	7.8	11.0	13.3	15.3	17.1
N2C-8	m³/hr	3.38	5.01	5.89	7.35	8.68	10.24	14.86	18.01	24.02	29.33	33.93	37.81
	cfm	2.0	2.9	3.5	4.3	5.1	6.0	8.7	10.6	14.1	17.3	20.0	22.3

Stated flows are for operation at 7 bar g (100 psi g / 0.7 MPa g) with reference to 25 °C

Part Number Breakdown / Product Key

Product Code	-	Model	Technology	Flow Control	O ₂ Purity	Maximum Design Pressure	Outlet Version
N2C	-	2	N	C	A	L	N
		4			B		A
		6					
		8		C = Constant			
N2C = NITROSource Compact		N = Non Equalising		A = High Purity (ppm)		B = Low Purity (%)	

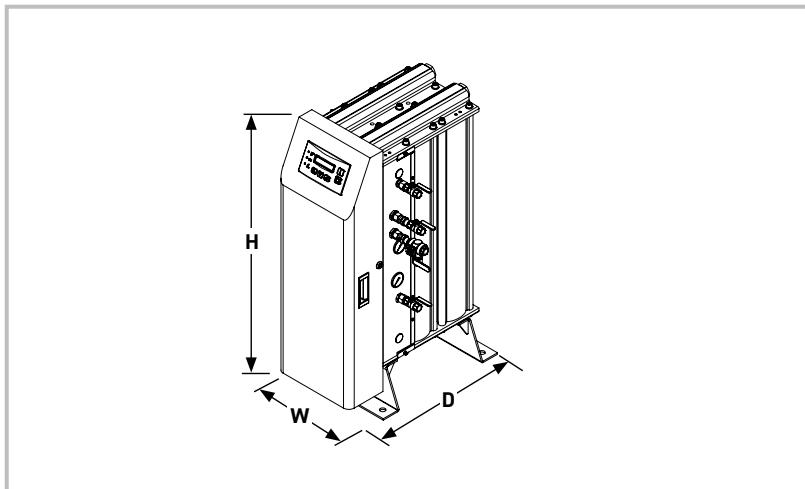


Weights and Dimensions

Model	Unpacked								Packed							
	Height (H)		Width (W)		Depth (D)		Weight		Height		Width		Depth		Weight	
	mm	ins	mm	ins	mm	ins	kg	lbs	mm	ins	mm	ins	mm	ins	kg	lbs
N2C-2	1034	41	450	18	471	19	98	216	1490	59	612	24	950	38	174	383
N2C-4					640	26	145	320							221	487
N2C-6					809	33	196	432							272	597
N2C-8					977	38	249	549							303	668

Preventative Maintenance Kits

Part Number	Description / Service Interval	Contents
606280162	12 Month MIST-X Silencer Kit (Every 12 Months)	MIST-X 150 Silencer
P010AO	12 Month Filter Element Kit (Every 12 Months)	P001AO Dust Filter Element
M24.PPM.0002	24 Month PPM Service Kit (Every 24 Months)	PPM Cell c/w Wiring
M24.PCT.0002	24 Month Percentage Service Kit (Every 24 Months)	% Cell c/w Wiring
606510003	24 Month Valve Overhaul Kit - Generator With Analyser (Every 24 Months)	Air Inlet Valves (x2) Exhaust Valves (x2) Outlet Valves (x2)
606510005	24 Month Valve Overhaul Kit - Generator Without Analyser (Every 24 Months)	Air Inlet Valves (x2) Exhaust Valves (x2) Outlet Valve

SmartFlux SA604

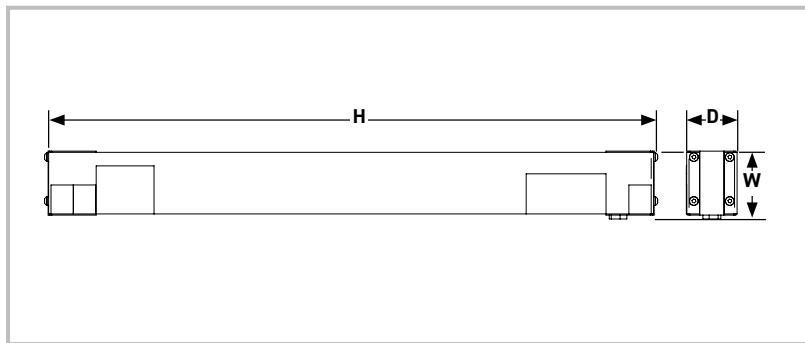

Performance data

Performance data is based on 20°C feed-air temperature and 1013 mbar ambient pressure

Purity %	Typical Nitrogen ¹⁾ flow rate in m ³ /hr ²⁾ (SCFM)					
	99.5	99.0	98.0	97.0	96.0	95.0
4 bar g (58 psi g)	0.20 (0.12)	0.32 (0.19)	0.50 (0.29)	0.73 (0.43)	0.84 (0.49)	1.04 (0.61)
5 bar g (72.5 psi g)	0.28 (0.16)	0.46 (0.27)	0.73 (0.43)	0.92 (0.54)	1.17 (0.69)	1.54 (0.91)
6 bar g (87 psi g)	0.44 (0.21)	0.60 (0.35)	0.92 (0.54)	1.20 (0.71)	1.53 (0.9)	1.75 (1.03)
7 bar g (101.5 psi g)	0.44 (0.26)	0.71 (0.42)	1.16 (0.68)	1.49 (0.88)	1.90 (1.12)	2.10 (1.24)
8 bar g (116 psi g)	0.54 (0.32)	0.85 (0.5)	1.31 (0.77)	1.75 (0.77)	2.17 (1.28)	2.60 (1.53)
9 bar g (130.5 psi g)	0.59 (0.35)	0.97 (0.57)	1.54 (0.91)	2.08 (1.22)	2.50 (1.47)	3.00 (1.77)
10 bar g (145 psi g)	0.67 (0.39)	1.11 (0.65)	1.78 (1.05)	2.29 (1.35)	2.80 (1.65)	3.40 (2)
11 bar g (159.5 psi g)	0.73 (0.43)	1.25 (0.74)	1.95 (1.15)	2.57 (1.51)	3.20 (1.88)	3.90 (2.3)
12 bar g (174 psi g)	0.79 (0.46)	1.39 (0.82)	2.17 (1.28)	2.80 (1.65)	3.40 (2)	4.20 (2.47)
13 bar g (188.5 psi g)	0.89 (0.52)	1.49 (0.88)	2.40 (1.41)	3.10 (1.82)	3.80 (2.24)	4.80 (2.83)

Maximum pressure drop <0.1 bar.

Values between brackets are indicative imperial values

¹⁾The above data represents the typical performance of a single membrane module. Actual performance can vary depending on factors such as feed air pressure and temperature. Please contact your Parker go to person for actual performance information to meet your application's requirements.

²⁾m³/hr refers to conditions at 1013 mbar(a) and 20°C.

For higher purities please contact Parker

Ambient Conditions

Ambient temperature	+2°C to +50°C (+36°F to 122°F)
Ambient pressure	atmospheric
Air quality	clean air without contaminants

Feed-air Conditions

Maximum operating pressure	13.0 bar g (190 psi g)
Min. / Max. operating temperature	+2°C to +50°C (+36°F to 122°F)
Maximum oil vapour content	<0.01 mg/m ³ (<0.01 ppm (w))
Particles	filtered at 0.01 µm cut off
Relative humidity	<100% (non condensing)

Flow Rate Corrections

Nitrogen flow rate at feed-air temperatures other than 20°C	Use bulletin S3.1.240*
Feed-air consumption at feed-air temperatures other than 20°C	Use bulletin S3.1.240*

* Revision number may vary, make sure to use the most recent Revision

Note

Parker membrane systems produce both nitrogen and oxygen enriched air. Nitrogen enriched air can cause suffocation and oxygen enriched air causes increased fire hazards. The oxygen enriched air is available at ambient pressure and pressure build-up of enriched oxygen at the outlet must be prevented, otherwise a serious (reversible) decrease in performance will result. The nitrogen enriched air produced should be treated as pressurised air.

Purity %	Typical Feed-air consumption at nitrogen flow rate in m ³ /hr ²⁾ (SCFM)					
	99.5	99.0	98.0	97.0	96.0	95.0
4 bar g (58 psi g)	1.9 (1.1)	1.8 (1.1)	1.9 (1.1)	2.3 (1.4)	2.3 (1.4)	2.5 (1.5)
5 bar g (72.5 psi g)	2.2 (1.3)	2.3 (1.4)	2.6 (1.5)	2.7 (1.6)	3.0 (1.8)	3.6 (2.1)
6 bar g (87 psi g)	2.5 (1.5)	2.8 (1.6)	3.2 (1.9)	3.4 (2)	3.9 (2.3)	4.0 (2.4)
7 bar g (101.5 psi g)	3.0 (1.8)	3.3 (1.9)	3.9 (2.3)	4.2 (2.5)	4.8 (2.8)	4.7 (2.8)
8 bar g (116 psi g)	3.5 (2.1)	3.8 (2.2)	4.4 (2.6)	4.9 (2.9)	5.4 (3.2)	5.8 (3.4)
9 bar g (130.5 psi g)	3.7 (2.2)	4.3 (2.5)	5.1 (3)	5.8 (3.4)	6.3 (3.7)	6.7 (3.9)
10 bar g (145 psi g)	4.1 (2.4)	4.8 (2.8)	5.9 (3.5)	6.3 (3.7)	7.0 (4.1)	7.5 (4.4)
11 bar g (159.5 psi g)	4.4 (2.6)	5.3 (3.1)	6.3 (3.7)	7.1 (4.2)	7.9 (4.6)	8.5 (5)
12 bar g (174 psi g)	4.6 (2.7)	5.9 (3.5)	7.0 (4.1)	7.7 (4.5)	8.4 (4.9)	9.3 (5.5)
13 bar g (188.5 psi g)	5.5 (3.2)	6.4 (3.8)	7.9 (4.6)	8.7 (5.1)	9.5 (5.6)	10.7 (6.3)

Material

Housing	Steel
Tube	Aluminum
Coating (housing)	ESPC to RAL 7039 (Quartz Grey)
Coating (tube)	none


Services on Request

3D model CAD STEP file

Weight, Dimensions and Connections

Dimensions H x W x D	758 x 80 x 63 mm (29.84" x 3.15" x 2.48")
Weight	3.2 kg (7.05 lb)
Connection feed-air	G ^{3/8} female to ISO 228
Connection nitrogen enriched air	G ^{3/8} female to ISO 228
Connection oxygen enriched air at atmospheric pressure	G ^{3/8} female to ISO 228
Dimensional drawing	Refer to K3.1.344

SmartFlux SA708

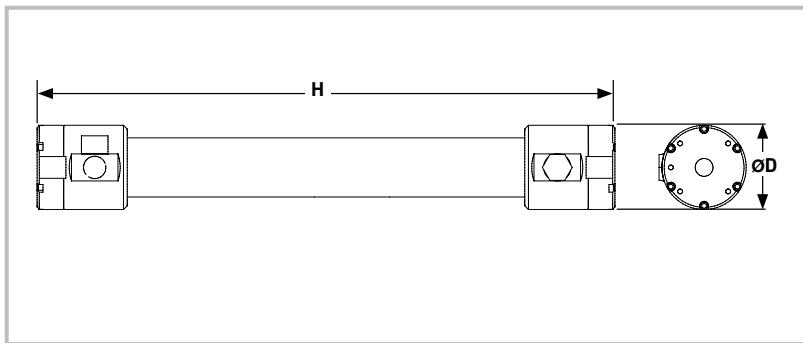

Performance data

Performance data is based on 20°C feed-air temperature and 1013 mbar ambient pressure

Purity %	Typical Nitrogen ¹⁾ flow rate in m ³ /hr ²⁾ (SCFM)							
	99.5	99	98	97	96	95	93	90
4 bar g (58 psi g)	0.90 (0.53)	1.44 (0.85)	2.20 (1.3)	2.91 (1.71)	3.63 (2.14)	4.36 (2.57)		
5 bar g (72.5 psi g)	1.3 (0.77)	2.06 (1.21)	3.09 (1.82)	4.05 (2.38)	5.10 (3)	6.15 (3.62)		
6 bar g (87 psi g)	1.71 (1)	2.67 (1.57)	3.99 (2.35)	5.18 (3.05)	6.56 (3.86)	7.94 (4.67)	11.3 (6.62)	18.2 (10.7)
7 bar g (101.5 psi g)	2.11 (1.24)	3.27 (1.93)	4.90 (2.89)	6.46 (3.8)	8.12 (4.78)	9.78 (5.76)	13.8 (8.1)	22.1 (13)
8 bar g (116 psi g)	2.50 (1.47)	3.87 (2.28)	5.82 (3.42)	7.73 (4.55)	9.67 (5.69)	11.6 (6.84)	16.4 (9.63)	26.6 (15.7)
9 bar g (130.5 psi g)	2.81 (1.66)	4.46 (2.62)	6.77 (3.98)	9.03 (5.32)	11.27 (6.63)	13.5 (7.95)	19.0 (11.2)	30.8 (18.1)
10 bar g (145 psi g)	3.12 (1.84)	4.94 (2.91)	7.64 (4.5)	10.3 (6.08)	12.9 (7.57)	15.4 (9.06)	21.7 (12.8)	35.6 (21)
11 bar g (159.5 psi g)	3.41 (2)	5.46 (3.21)	8.49 (5)	11.5 (6.78)	14.5 (8.51)	17.3 (10.2)		
12 bar g (174 psi g)	3.68 (2.16)	5.96 (3.51)	9.32 (5.49)	12.5 (7.38)	15.9 (9.35)	19.1 (11.2)		
13 bar g (188.5 psi g)	3.93 (2.32)	6.45 (3.8)	10.1 (5.92)	13.6 (7.98)	17.1 (10.1)	20.9 (12.3)		

Maximum pressure drop at Purity <0.2 bar

Values between brackets are indicative of imperial values

¹⁾The above data represents the typical performance of a single membrane module. Actual performance can vary depending on factors such as feed air pressure and temperature. Please contact your Parker go to person for actual performance information to meet your application's requirements.

²⁾m³/hr refers to conditions at 1013mbar(a) and 20°C.

For purities >99.5% please contact Parker

Ambient Conditions

Ambient temperature	+2°C to +50°C (+36°F to 122°F)
Ambient pressure	atmospheric
Air quality	clean air without contaminants

Feed-air Conditions

Maximum operating pressure	13.0 bar g (190 psi g)
Min. / Max. operating temperature	+2°C / +50°C (+36°F to 122°F)
Maximum oil vapour content	<0.01 mg/m ³ (<0.01 ppm (w))
Particles	filtered at 0.01 µm cut off
Relative humidity	<100% (non condensing)

Flow Rate Corrections

Nitrogen flow rate at feed-air temperatures other than 20°C	Use bulletin S3.1.240*
Feed-air consumption at feed-air temperatures other than 20°C	Use bulletin S3.1.240*

* Revision number may vary, make sure to use the most recent Revision

Note

Parker membrane systems produce both nitrogen and oxygen enriched air. Nitrogen enriched air can cause suffocation and oxygen enriched air causes increased fire hazards. The oxygen enriched air is available at ambient pressure and pressure build-up of enriched oxygen at the outlet must be prevented, otherwise a serious (reversible) decrease in performance will result. The nitrogen enriched air produced should be treated as pressurised air.

Purity %	Typical Feed-air consumption at nitrogen flow rate in m ³ /hr ²⁾ (SCFM)							
	99.5	99	98	97	96	95	93	90
4 bar g (58 psi g)	7.5 (4.4)	8.6 (5.1)	9.0 (5.3)	9.5 (5.6)	10.4 (6.1)	11.2 (6.6)		
5 bar g (72.5 psi g)	10.1 (6)	11.5 (6.7)	11.7 (6.9)	12.6 (7.4)	14.0 (8.2)	15.2 (8.9)		
6 bar g (87 psi g)	12.3 (7.2)	13.8 (8.1)	14.2 (8.4)	15.3 (9)	17.1 (10.1)	18.8 (11.1)	22.6 (13.3)	29.9 (17.6)
7 bar g (101.5 psi g)	14.7 (8.6)	16.2 (9.6)	17.1 (10)	18.7 (11)	20.8 (12.2)	22.7 (13.4)	27.1 (16)	36.0 (21.2)
8 bar g (116 psi g)	16.5 (9.7)	18.5 (10.9)	19.7 (11.6)	21.9 (12.9)	24.4 (14.4)	26.5 (15.6)	31.8 (18.7)	42.8 (25.2)
9 bar g (130.5 psi g)	18.5 (10.9)	21.1 (12.4)	22.7 (13.4)	25.6 (15.1)	28.3 (16.7)	30.6 (18)	36.8 (21.6)	49.4 (29.1)
10 bar g (145 psi g)	20.4 (12)	23.2 (13.7)	25.5 (15)	29.2 (17.2)	32.1 (18.9)	34.8 (20.5)	42.0 (24.7)	57.2 (33.7)
11 bar g (159.5 psi g)	22.1 (13)	25.5 (15)	28.3 (16.6)	32.4 (19.1)	36.1 (21.2)	39.0 (23)		
12 bar g (174 psi g)	24.1 (14.2)	27.9 (16.4)	31.3 (18.4)	35.5 (20.9)	39.8 (23.4)	43.3 (25.5)		
13 bar g (188.5 psi g)	25.9 (15.3)	30.9 (18.2)	34.3 (20.2)	38.8 (22.8)	43.2 (25.5)	47.8 (28.1)		

Mechanical Design Housing

Design pressure	15 bar g ⁴⁾ (217 psi g ⁴⁾
Design temperature	65°C ⁴⁾ (149°F ⁴⁾

⁴⁾ Membrane ambient and operating conditions are lower

Material

Housing	Aluminum
Coating	ESPC to RAL 7039 (Quartz Grey) Dry Film Thickness: 60 micron


Services on Request

3D model CAD STEP file

Weight, Dimensions and Connections

Dimensions H x Ø D	782 x 114 mm (30.79" x 4.49")
Weight	5.5 kg (12.1 lb)
Connection feed-air	G¾ female to ISO 228
Connection nitrogen enriched air	G¾ female to ISO 228
Connection oxygen enriched air at atmospheric pressure enriched air	G1 female to ISO 228
Dimensional drawing	Refer to K3.1.383

SmartFlux SA1508

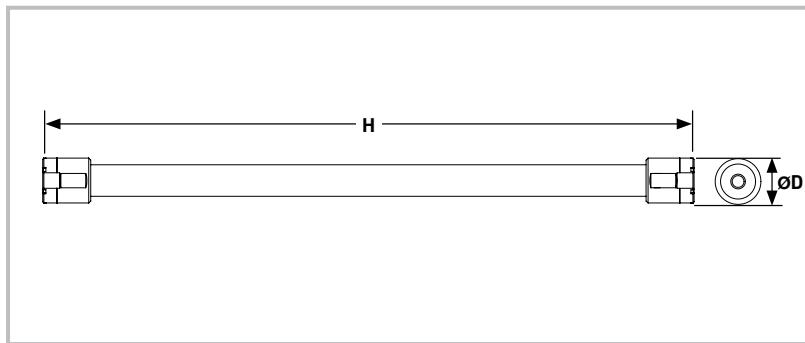

Performance data

Performance data is based on 20°C feed-air temperature and 1013 mbar ambient pressure

Purity %	Typical Nitrogen ¹⁾ flow rate in m ³ /hr ²⁾ (SCFM)					
	99.5	99.0	98.0	97.0	96.0	95.0
4 bar g (58 psi g)	2.8 (1.6)	4.0 (2.4)	5.7 (3.4)	7.1 (4.2)	9.5 (5.6)	10.9 (6.4)
5 bar g (72.5 psi g)	3.7 (2.2)	5.3 (3.1)	7.9 (4.6)	10.2 (6)	12.8 (7.5)	15.2 (8.9)
6 bar g (87 psi g)	4.7 (2.8)	7.0 (4.1)	10.2 (6)	13.0 (7.7)	15.7 (9.2)	20.5 (12.1)
7 bar g (101.5 psi g)	6.1 (3.6)	8.5 (5)	12.3 (7.2)	16.5 (9.7)	19.5 (11.5)	24.3 (14.3)
8 bar g (116 psi g)	6.9 (4.1)	9.7 (5.7)	14.3 (8.4)	20.2 (11.9)	23.3 (13.7)	28.1 (16.5)
9 bar g (130.5 psi g)	7.8 (4.6)	11.1 (6.5)	17.0 (10)	22.2 (13.1)	27.0 (15.9)	32.2 (19)
10 bar g (145 psi g)	8.6 (5.1)	12.6 (7.4)	18.5 (10.9)	24.2 (14.2)	30.2 (17.8)	37.4 (22)
11 bar g (159.5 psi g)	9.6 (5.7)	14.2 (8.4)	20.7 (12.2)	27.3 (16.1)	33.0 (19.4)	41.0 (24.1)
12 bar g (174 psi g)	10.5 (6.2)	15.2 (8.9)	22.9 (13.5)	29.5 (17.4)	36.6 (21.5)	45.6 (26.8)
13 bar g (188.5 psi g)	11.3 (6.7)	16.3 (9.6)	24.9 (14.7)	32.0 (18.8)	39.5 (23.2)	48.8 (28.7)

Maximum pressure drop at Purity <0.2 bar

Values between brackets are indicative of imperial values

¹⁾ The above data represents the typical performance of a single membrane module. Actual performance can vary depending on factors such as feed air pressure and temperature. Please contact your Parker go to person for actual performance information to meet your application's requirements.

²⁾ m³/hr refers to conditions at 1013 mbar(a) and 20°C

For purities >99.5% please contact Parker

Ambient Conditions

Ambient temperature	+2°C to +50°C (+36°F to 122°F)
Ambient pressure	atmospheric
Air quality	clean air without contaminants

Feed-air Conditions

Maximum operating pressure	13.0 bar g (190 psi g)
Min. / Max. operating temperature	+2°C / +50°C (+36°F to 122°F)
Maximum oil vapour content	<0.01 mg/m ³ (<0.01 ppm (w))
Particles	filtered at 0.01 µm cut off
Relative humidity	<100% (non condensing)

Flow Rate Corrections

Nitrogen flow rate at feed-air temperatures other than 20°C	Use bulletin S3.1.240*
Feed-air consumption at feed-air temperatures other than 20°C	Use bulletin S3.1.240*

* Revision number may vary, make sure to use the most recent revision

Note

Parker membrane systems produce both nitrogen and oxygen enriched air. Nitrogen enriched air can cause suffocation and oxygen enriched air causes increased fire hazards. The oxygen enriched air is available at ambient pressure and pressure build-up of enriched oxygen at the outlet must be prevented, otherwise a serious (reversible) decrease in performance will result. The nitrogen enriched air produced should be treated as pressurised air.

Purity %	Typical Feed-air consumption at nitrogen flow rate in m ³ /hr ²⁾ (SCFM)					
	99.5	99.0	98.0	97.0	96.0	95.0
4 bar g (58 psi g)	21 (12)	21 (12)	22 (13)	22 (13)	26 (15)	27 (16)
5 bar g (72.5 psi g)	24 (14)	26 (15)	29 (17)	31 (18)	34 (20)	36 (21)
6 bar g (87 psi g)	29 (17)	33 (19)	36 (21)	38 (22)	41 (24)	48 (28)
7 bar g (101.5 psi g)	36 (21)	38 (22)	41 (24)	48 (28)	50 (29)	56 (33)
8 bar g (116 psi g)	38 (22)	42 (25)	47 (28)	56 (33)	58 (34)	63 (37)
9 bar g (130.5 psi g)	44 (26)	48 (28)	55 (32)	62 (36)	67 (39)	72 (42)
10 bar g (145 psi g)	50 (29)	56 (33)	61 (36)	68 (40)	75 (44)	84 (49)
11 bar g (159.5 psi g)	51 (30)	60 (35)	66 (39)	74 (44)	80 (47)	91 (54)
12 bar g (174 psi g)	57 (34)	65 (38)	76 (45)	83 (49)	92 (54)	103 (61)
13 bar g (188.5 psi g)	66 (39)	72 (42)	85 (50)	92 (54)	101 (59)	113 (67)

Mechanical Design Housing

Design pressure	15 bar g ⁴⁾ (217 psi g) ⁴⁾
Design temperature	65°C ⁴⁾ (149°F) ⁴⁾

⁴⁾ Membrane ambient and operating conditions are lower

Material

Housing	Aluminum
Coating	ESPC to RAL 7039 (Quartz Grey) Dry Film Thickness: 60 micron


Services on Request

Material certificates EN10204-3.1 on housing material (for Stainless Steel only)
3D model CAD STEP file

Weight, Dimensions and Connections

Dimensions H x Ø D	1655 x 114 mm (65.12" x 4.49")
Weight	6.8 kg (15 lb)
Connection feed-air	G¾ female to ISO 228
Connection nitrogen enriched air	G¾ female to ISO 228
Connection oxygen enriched air at atmospheric pressure	G1 female to ISO 228
Dimensional drawing	Refer to K3.1.330

SmartFlux SA1508SS

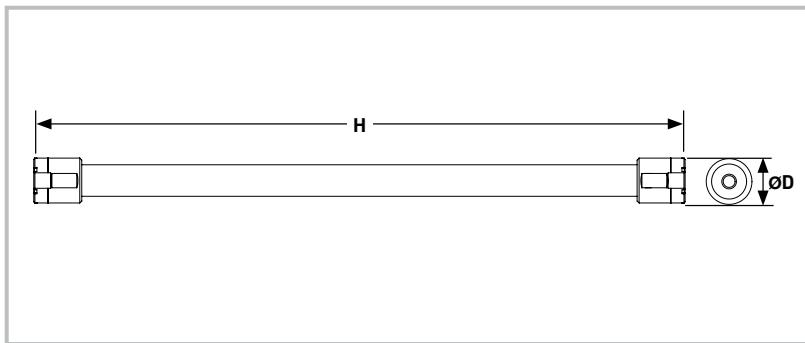

Performance data

Performance data is based on 20°C feed-air temperature and 1013 mbar ambient pressure

Purity %	Typical Nitrogen ¹⁾ flow rate in m ³ /hr ²⁾ (SCFM)					
	99.5	99.0	98.0	97.0	96.0	95.0
4 bar g (58 psi g)	2.8 (1.6)	4.0 (2.4)	5.7 (3.4)	7.1 (4.2)	9.5 (5.6)	10.9 (6.4)
5 bar g (72.5 psi g)	3.7 (2.2)	5.3 (3.1)	7.9 (4.6)	10.2 (6)	12.8 (7.5)	15.2 (8.9)
6 bar g (87 psi g)	4.7 (2.8)	7.0 (4.1)	10.2 (6)	13.0 (7.7)	15.7 (9.2)	20.5 (12.1)
7 bar g (101.5 psi g)	6.1 (3.6)	8.5 (5)	12.3 (7.2)	16.5 (9.7)	19.5 (11.5)	24.3 (14.3)
8 bar g (116 psi g)	6.9 (4.1)	9.7 (5.7)	14.3 (8.4)	20.2 (11.9)	23.3 (13.7)	28.1 (16.5)
9 bar g (130.5 psi g)	7.8 (4.6)	11.1 (6.5)	17.0 (10)	22.2 (13.1)	27.0 (15.9)	32.2 (19)
10 bar g (145 psi g)	8.6 (5.1)	12.6 (7.4)	18.5 (10.9)	24.2 (14.2)	30.2 (17.8)	37.4 (22)
11 bar g (159.5 psi g)	9.6 (5.7)	14.2 (8.4)	20.7 (12.2)	27.3 (16.1)	33.0 (19.4)	41.0 (24.1)
12 bar g (174 psi g)	10.5 (6.2)	15.2 (8.9)	22.9 (13.5)	29.5 (17.4)	36.6 (21.5)	45.6 (26.8)
13 bar g (188.5 psi g)	11.3 (6.7)	16.3 (9.6)	24.9 (14.7)	32.0 (18.8)	39.5 (23.2)	48.8 (28.7)

Maximum pressure drop at Purity <0.2 bar

Values between brackets are indicative of imperial values

¹⁾The above data represents the typical performance of a single membrane module. Actual performance can vary depending on factors such as feed air pressure and temperature. Please contact your Parker go to person for actual performance information to meet your application's requirements.

²⁾m³/hr refers to conditions at 1013 mbar(a) and 20°C

For purities >99.5% please contact Parker

Ambient Conditions

Ambient temperature	+2°C to +50°C (+36°F to 122°F)
Ambient pressure	atmospheric
Air quality	clean air without contaminants

Feed-air Conditions

Maximum operating pressure	13.0 bar g (190 psi g)
Min. / Max. operating temperature	+2°C to +50°C (+36°F to 122°F)
Maximum oil vapour content	<0.01 mg/m ³ (<0.01 ppm (w))
Particles	filtered at 0.01 µm cut off
Relative humidity	<100% (non condensing)

Flow Rate Corrections

Nitrogen flow rate at feed-air temperatures other than 20°C	Use bulletin S3.1.240*
Feed-air consumption at feed-air temperatures other than 20°C	Use bulletin S3.1.240*

* Revision number may vary, make sure to use the most recent revision

Note

Parker membrane systems produce both nitrogen and oxygen enriched air. Nitrogen enriched air can cause suffocation and oxygen enriched air causes increased fire hazards. The oxygen enriched air is available at ambient pressure and pressure build-up of enriched oxygen at the outlet must be prevented, otherwise a serious (reversible) decrease in performance will result. The nitrogen enriched air produced should be treated as pressurised air.

Mechanical Design Housing

Design pressure	15 bar g ⁴⁾ (217 psi g ⁴⁾
Design temperature	65°C ⁴⁾ (149°F ⁴⁾

⁴⁾ Membrane operating limits are lower

Material

Housing	Stainless Steel
Coating	None

Services on Request


Material certificates EN10204-3.1 on housing material
(for Stainless Steel only)

3D model CAD STEP file

Weight, Dimensions and Connections

Dimensions H x Ø D	1654 x 114 mm (65.12" x 4.49")
Weight	18 kg (40 lb)
Connection feed-air	G¾ female to ISO 228
Connection nitrogen enriched air	G¾ female to ISO 228
Connection oxygen enriched air at atmospheric pressure	G1 female to ISO 228
Dimensional drawing	Refer to K3.1.330

SmartFlux SA15015

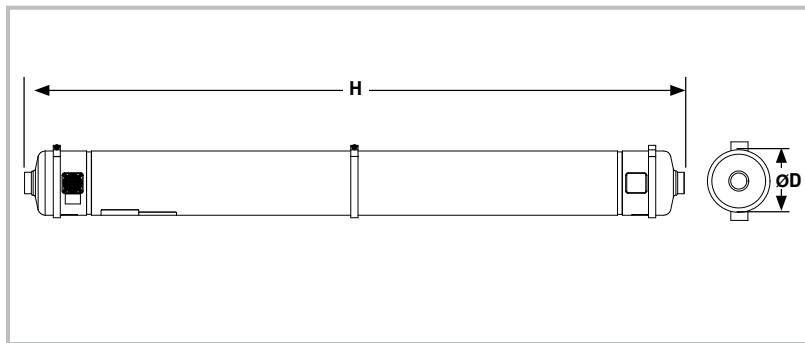

Performance data

Performance data is based on 20°C feed-air temperature and 1013 mbar ambient pressure

Purity %	Typical ¹⁾ Nitrogen flow rate in m ³ /hr ²⁾ (SCFM)				
	99	98	97	96	95
4 bar g (58 psi g)	21.8 (12.8)	29.6 (17.4)	37.4 (22.0)	48.4 (28.5)	59.5 (35.0)
5 bar g (73 psi g)	29.5 (17.3)	42.5 (25.0)	55.5 (32.7)	69.4 (40.8)	83.2 (49.0)
6 bar g (87 psi g)	36.8 (21.7)	54.6 (32.1)	72.3 (42.6)	89.1 (52.5)	105.9 (62.4)
7 bar g (102 psi g)	43.9 (25.8)	65.8 (38.8)	87.8 (51.7)	107.8 (63.4)	127.7 (75.2)
8 bar g (116 psi g)	50.7 (29.8)	76.3 (44.9)	102.0 (60.0)	125.3 (73.7)	148.6 (87.5)
9 bar g (130 psi g)	57.2 (33.6)	86.0 (50.6)	114.8 (67.6)	141.6 (83.4)	168.5 (99.2)
10 bar g (145 psi g)	63.3 (37.3)	94.8 (55.8)	126.4 (74.4)	156.9 (92.3)	187.4 (110.3)
11 bar g (160 psi g)	69.2 (40.7)	102.9 (60.6)	136.6 (80.4)	171.0 (100.6)	205.4 (120.9)
12 bar g (174 psi g)	74.8 (44.0)	110.1 (64.8)	145.5 (85.6)	183.9 (108.3)	222.4 (130.9)
13 bar g (189 psi g)	80.1 (47.1)	116.6 (68.6)	153.1 (90.1)	195.8 (115.2)	238.5 (140.3)

Maximum pressure drop at Purity: ≤0.2 bar

Values between brackets are indicative imperial values

¹⁾The above data represents the typical performance of a single membrane module. Actual performance can vary depending on factors such as feed air condition and is depending on temperature see Flow Rate Correction below.

Ambient Conditions

Ambient temperature	+2°C to +60°C (+36°F to 140°F)
Ambient pressure	atmospheric
Air quality	clean air without contaminants

Operating Conditions Feed-air

Maximum operating pressure	13 bar g (190 psi g)
Min. / Max. operating temperature	+2°C / +60°C (+36°F to 140°F)
Maximum oil vapour content	<0.01 mg/m ³ (<0.01 ppm (w))
Particles	filtered at 0.01 µm cut off
Relative humidity	<100% (non condensing)

Flow Rate Corrections

Nitrogen flow rate at feed-air temperatures other than 20°C	Use bulletin S3.1.240 ³⁾
Feed-air consumption at feed-air temperatures other than 20°C	Use bulletin S3.1.240 ³⁾

³⁾ Revision number may vary, make sure to use the most recent revision

Mechanical Design Housing

Design pressure	15 bar g (217 psi g) ⁴⁾
Design temperature	65°C (149°F) ⁴⁾

⁴⁾ Membrane operating limits are lower

Note

Parker membrane systems produce both nitrogen and oxygen enriched air. Nitrogen enriched air can cause suffocation and oxygen enriched air causes increased fire hazards. The oxygen enriched air is available at ambient pressure and pressure build-up of enriched oxygen at the outlet must be prevented, otherwise a serious (reversible) decrease in performance will result. The nitrogen enriched air produced should be treated as pressurised air.

Purity %	Typical Feed-air consumption at nitrogen flow rate in m ³ /hr ²⁾ (SCFM)				
	99	98	97	96	95
4 bar g (58 psi g)	116 (68)	116 (69)	120 (71)	141 (83)	155 (91)
5 bar g (73 psi g)	152 (90)	164 (96)	176 (104)	198 (116)	211 (124)
6 bar g (87 psi g)	186 (109)	206 (121)	226 (133)	249 (147)	262 (154)
7 bar g (102 psi g)	216 (127)	244 (143)	270 (159)	296 (174)	299 (176)
8 bar g (116 psi g)	244 (144)	278 (163)	309 (182)	338 (199)	347 (204)
9 bar g (130 psi g)	271 (159)	308 (181)	342 (201)	376 (221)	392 (231)
10 bar g (145 psi g)	298 (175)	334 (197)	371 (218)	410 (241)	431 (254)
11 bar g (160 psi g)	325 (191)	360 (212)	396 (233)	445 (262)	472 (278)
12 bar g (174 psi g)	352 (207)	386 (227)	422 (248)	478 (281)	511 (301)
13 bar g (189 psi g)	376 (222)	408 (240)	444 (261)	509 (300)	548 (323)

²⁾ m³/hr refers to conditions at 1013 mbar(a) and 20°C

³⁾ Performance certificates available up to 11 barg.

Material

Housing	Aluminum
Coating	Sulfuric Acid Anodizing [MIL-A-8625F, Type II]

Services Available on Request


Material certificates EN10204-2.2 on request

3D model CAD STEP file

Weight, Dimensions and Connections

Dimensions H x Ø D	1750 x 256/198 mm (68.9" x 10.1/7.8")
Weight	22.2 kg (48.9 lb)
Connection feed-air	G1½" female to ISO 228
Connection nitrogen enriched air	G1½" female to ISO 228
Connection oxygen enriched air at atmospheric pressure	Dual Hose Connection 1¾" (Adapter OD = 45mm)
Dimensional drawing	Refer to K3.1.415

SmartFlux SA15020

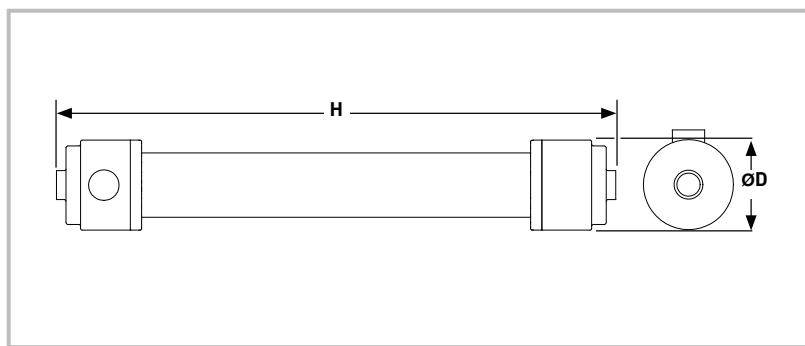

Performance data

Performance data is based on 20°C feed-air temperature and 1013 mbar ambient pressure

Purity %	Typical Nitrogen ¹⁾ flow rate in m ³ /hr ²⁾ (SCFM)					
	99.5	99.0	98.0	97.0	96.0	95.0
4 bar g (58 psi g)	17 (10)	25 (15)	36 (21)	47 (28)	57 (34)	70 (41)
5 bar g (72.5 psi g)	23 (14)	33 (19)	49 (29)	66 (39)	82 (48)	93 (55)
6 bar g (87 psi g)	29 (17)	43 (25)	63 (37)	83 (49)	102 (60)	120 (71)
7 bar g (101.5 psi g)	37 (22)	53 (31)	78 (46)	100 (59)	125 (74)	154 (91)
8 bar g (116 psi g)	44 (26)	62 (36)	90 (53)	117 (69)	144 (85)	178 (105)
9 bar g (130.5 psi g)	49 (29)	72 (42)	103 (61)	133 (78)	165 (97)	216 (127)

Maximum pressure drop at Purity: <0.2 bar

Values between brackets are indicative imperial values*

¹⁾ The above data represents the typical performance of a single membrane module. Actual performance can vary depending on factors such as feed air pressure and temperature. Please contact your Parker go to person for actual performance information to meet your application's requirements.

²⁾ m³/hr refers to conditions at 1013 mbar(a) and 20°C

For higher purities please contact Parker

Ambient Conditions

Ambient temperature	+2°C to +50°C (+36°F to 122°F)
Ambient pressure	atmospheric
Air quality	clean air without contaminants

Operating Conditions Feed-air

Maximum operating pressure	9.0 bar g (130.5 psi g)
Min. / Max. operating temperature	+2°C to +50°C (+36°F to 122°F)
Maximum oil vapour content	<0.01 mg/m ³ (<0.01 ppm (w))
Particles	filtered at 0.01 µm cut off
Relative humidity	<100% (non condensing)

Flow Rate Corrections

Nitrogen flow rate at feed-air temperatures other than 20°C	Use bulletin S3.1.240 ³⁾
Feed-air consumption at feed-air temperatures other than 20°C	Use bulletin S3.1.240 ³⁾

³⁾ Revision number may vary, make sure to use the most recent revision

Note

Parker membrane systems produce both nitrogen and oxygen enriched air. Nitrogen enriched air can cause suffocation and oxygen enriched air causes increased fire hazards. The oxygen enriched air is available at ambient pressure and pressure build-up of enriched oxygen at the outlet must be prevented, otherwise a serious (reversible) decrease in performance will result. The nitrogen enriched air produced should be treated as pressurised air.

Purity %	Typical Feed-air consumption at nitrogen flow rate in m ³ /hr ²⁾ (SCFM)					
	99.5	99.0	98.0	97.0	96.0	95.0
4 bar g (58 psi g)	127 (75)	126 (74)	135 (79)	145 (85)	155 (91)	169 (99)
5 bar g (72.5 psi g)	144 (85)	155 (91)	171 (101)	194 (114)	216 (127)	218 (128)
6 bar g (87 psi g)	170 (100)	191 (112)	214 (126)	239 (141)	261 (154)	276 (162)
7 bar g (101.5 psi g)	202 (119)	223 (131)	258 (152)	281 (165)	315 (185)	348 (205)
8 bar g (116 psi g)	232 (137)	255 (150)	293 (172)	323 (190)	361 (212)	399 (235)
9 bar g (130.5 psi g)	264 (155)	298 (175)	335 (197)	369 (217)	413 (243)	485 (285)

Mechanical Design Housing

Design pressure	14 bar g ⁴⁾ (203 psi g) ⁴⁾
Design temperature	65°C ⁴⁾ (149°F) ⁴⁾

⁴⁾ Membrane operating limits are lower

Material

Housing	Aluminum
Coating	ESPC to RAL 7039 (Quartz Grey) Dry Film Thickness: 60 micron


Services Available on Request

3D model CAD STEP file

Weight, Dimensions and Connections

Dimensions H x Ø D	1740 x 280 mm (68.50" x 11.02")
Weight	46 kg (102 lb)
Connection feed-air	G2½ female to ISO 228
Connection nitrogen enriched air	G2½ female to ISO 228
Connection oxygen enriched air at atmospheric pressure	100mm (3.94") OD
Dimensional drawing	Refer to K3.1.339

HiFluxx ST304

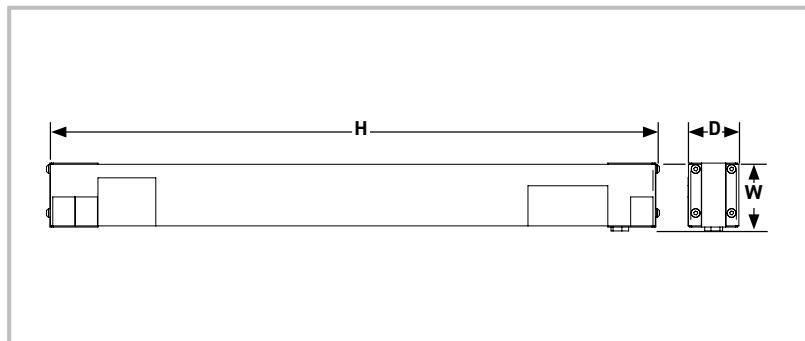

Purity % ¹	Typical ¹⁾ Nitrogen flow rate in m ³ /hr ²⁾ (SCFM)				
	99	98	97	96	95
4 bar g	0.15	0.27	0.39	0.50	0.62
5 bar g	0.19	0.34	0.48	0.62	0.78
6 bar g	0.25	0.45	0.62	0.80	0.98
7 bar g	0.29	0.52	0.73	0.93	1.14
8 bar g	0.33	0.60	0.83	1.06	1.31
9 bar g	0.39	0.70	0.95	1.23	1.52
10 bar g	0.41	0.75	1.04	1.33	1.64
11 bar g	0.43	0.82	1.15	1.48	1.83
12 bar g	0.45	0.89	1.25	1.63	2.02

Maximum pressure drop <0.3 bar.

Maximum nitrogen flow rate = minimum flow rate + 30%

¹ Parker membranes separate oxygen from pressurised air. The composition of the product is determined by measuring the residual oxygen content. The nitrogen content is calculated by subtracting the residual oxygen content from 100%. Air is composed of nitrogen (78.1%), oxygen (20.9%), Argon (0.9%), CO₂ (0.03%), and some trace inert gases. Therefore it should be born in mind that the value that is normally called the nitrogen content actually is the inert gas content.

² m³/hr refers to conditions at 1013 mbar(a) and 20°C

Purity %	Typical Feed-air consumption at nitrogen flow rate in m ³ /hr ²⁾ (SCFM)				
	99	98	97	96	95
4 bar g	1.16	1.29	1.43	1.54	1.69
5 bar g	1.44	1.61	1.78	1.92	2.11
6 bar g	1.73	1.98	2.18	2.39	2.65
7 bar g	2.02	2.31	2.55	2.79	3.09
8 bar g	2.31	2.64	2.91	3.19	3.53
9 bar g	2.70	3.06	3.33	3.69	4.10
10 bar g	2.89	3.30	3.64	3.99	4.42
11 bar g	3.45	3.85	4.24	4.58	4.94
12 bar g	3.60	4.17	4.63	5.04	5.46

*Maximum inlet temperature, 35°C when operating at 13 bar g.
**Maximum inlet pressure, 10 bar g when operating at 45°C.

Feed-air Conditions

Maximum operating pressure	13 bar g**
Min. / Max. operating temperature	+2°C / +45°C*
Maximum oil vapour content	<0.01 mg/m ³
Particles	filtered at 0.01 µm cut off
Relative humidity	<100% (non condensing)

*Maximum inlet temperature, 35°C when operating at 13 bar g.

**Maximum inlet pressure, 10 bar g when operating at 45°C.

Flow Rate Corrections

Nitrogen flow rate at feed temperatures other than 20°C	Use bulletin S3.1.059*
Feed-air consumption at feed-air temperatures other than 20°C	Use bulletin S3.1.059*

*version number may vary, make sure to use the most recent version

Material

Housing	Aluminum
---------	----------

Services on Request

3D model CAD STEP file


Weight, Dimensions and Connections

Dimensions H x W x D	386 x 80 x 63 mm
Weight	2.3 kg
Connection inlet / outlet	G¾ female
Vent	G¾ female
Dimensional drawing	Refer to K3.1.348

Note

Parker membrane systems produce both nitrogen and oxygen enriched air. Nitrogen enriched air can cause suffocation and oxygen enriched air causes increased fire hazards. The oxygen enriched air is available at ambient pressure and pressure build-up of enriched oxygen at the outlet must be prevented, otherwise a serious (reversible) decrease in performance will result. The nitrogen enriched air produced should be treated as pressurised air.

HiFluxx DT304

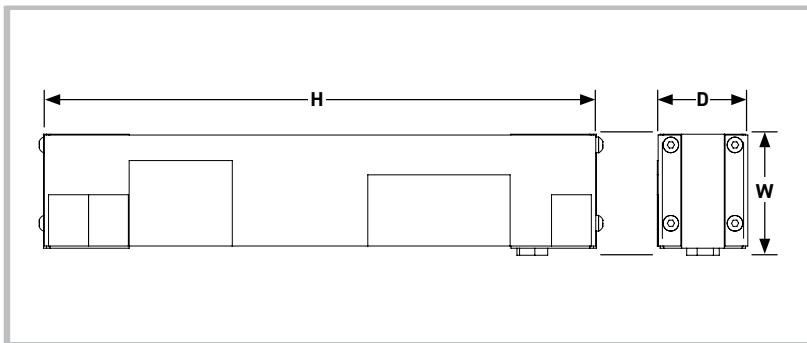

Performance data

Performance data is based on 20°C feed-air temperature and 1013 mbar ambient pressure

Purity % ¹	Typical ¹⁾ Nitrogen flow rate in m ³ /hr ²⁾ (SCFM)					
	99.5	99	98	97	96	95
4 bar g	0.29	0.47	0.75	1.00	1.26	1.55
5 bar g	0.36	0.59	0.94	1.25	1.57	1.94
6 bar g	0.47	0.75	1.19	1.61	2.00	2.43
7 bar g	0.55	0.88	1.39	1.87	2.33	2.84
8 bar g	0.62	1.00	1.59	2.14	2.67	3.24
9 bar g	0.71	1.14	1.79	2.44	3.03	3.68
10 bar g	0.78	1.25	1.99	2.68	3.33	4.05
11 bar g	0.83	1.35	2.14	2.89	3.63	4.44
12 bar g	0.89	1.46	2.30	3.11	3.94	4.83

Maximum pressure drop <0.8 bar.

Maximum nitrogen flow rate = minimum flow rate + 10%

1. Parker membranes separate oxygen from pressurised air. The composition of the product is determined by measuring the residual oxygen content. The nitrogen content is calculated by subtracting the residual oxygen content from 100%. Air is composed of nitrogen (78.1%), oxygen (20.9%), Argon (0.9%), CO₂ (0.03%), and some trace inert gases. Therefore it should be born in mind that the value that is normally called the nitrogen content actually is the inert gas content.

2. m³/hr refers to conditions at 1013 mbar(a) and 20°C

Ambient Conditions

Ambient temperature	+2°C to +45°C*
Ambient pressure	atmospheric
Air quality	clean air without contaminants

*Maximum inlet temperature, 35°C when operating at 13 bar g.

Feed-air Conditions

Maximum operating pressure	13 bar g**
Min. / Max. operating temperature	+2°C / +45°C*
Maximum oil vapour content	<0.01 mg/m ³
Particles	filtered at 0.01 µm cut off
Relative humidity	<100% (non condensing)

*Maximum inlet temperature, 35°C when operating at 13 bar g.

**Maximum inlet pressure, 10 bar g when operating at 45°C.

Flow Rate Corrections

Nitrogen flow rate at feed temperatures other than 20°C	Use bulletin S3.1.059*
Feed-air consumption at feed-air temperatures other than 20°C	Use bulletin S3.1.059*

*version number may vary, make sure to use the most recent version

Purity %	Typical Feed-air consumption at nitrogen flow rate in m ³ /hr ²⁾ (SCFM)					
	99.5	99	98	97	96	95
4 bar g	2.56	2.78	3.16	3.41	3.77	4.03
5 bar g	3.20	3.47	3.95	4.26	4.72	5.04
6 bar g	3.93	4.29	4.89	5.30	5.80	6.32
7 bar g	4.58	5.00	5.70	6.18	6.76	7.37
8 bar g	5.24	5.72	6.52	7.06	7.73	8.43
9 bar g	5.93	6.53	7.33	8.05	8.78	9.57
10 bar g	6.55	7.14	8.15	8.83	9.66	10.5
11 bar g	7.50	8.13	9.22	10.1	10.9	11.5
12 bar g	7.99	8.73	9.89	10.9	11.8	12.5

Material

Housing	Aluminum
---------	----------

Services on Request

3D model CAD STEP file


Weight, Dimensions and Connections

Dimensions H x W x D	386 x 145 x 63 mm
Weight	4.0 kg
Connection inlet / outlet	G ³ / ₈ female
Vent	G ³ / ₈ female
Dimensional drawing	Refer to K3.1.349

Note

Parker membrane systems produce both nitrogen and oxygen enriched air. Nitrogen enriched air can cause suffocation and oxygen enriched air causes increased fire hazards. The oxygen enriched air is available at ambient pressure and pressure build-up of enriched oxygen at the outlet must be prevented, otherwise a serious (reversible) decrease in performance will result. The nitrogen enriched air produced should be treated as pressurised air.

HiFluxx TT304

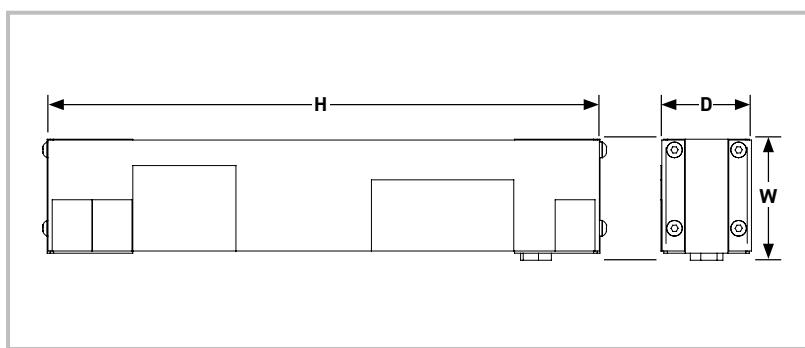

Performance data

Performance data is based on 20°C feed-air temperature and 1013 mbar ambient pressure

Purity % ¹	Minimum nitrogen flow rate in m ³ /hr ²					
	99.5	99	98	97	96	95
4 bar g	0.50	0.74	1.13	1.49	1.79	2.28
5 bar g	0.62	0.93	1.41	1.86	2.24	2.85
6 bar g	0.77	1.17	1.78	2.36	2.93	3.55
7 bar g	0.90	1.37	2.08	2.75	3.41	4.14
8 bar g	1.03	1.57	2.37	3.14	3.90	4.73
9 bar g	1.16	1.73	2.66	3.54	4.45	5.39
10 bar g	1.28	1.96	2.97	3.93	4.88	5.92
11 bar g	1.36	2.07	3.19	4.25	5.32	6.48
12 bar g	1.43	2.18	3.41	4.57	5.77	7.05

Maximum pressure drop < 0.8 bar.

Maximum nitrogen flow rate = minimum flow rate + 10%

¹. Parker membranes separate oxygen from pressurised air. The composition of the product is determined by measuring the residual oxygen content. The nitrogen content is calculated by subtracting the residual oxygen content from 100%. Air is composed of nitrogen (78.1%), oxygen (20.9%), Argon (0.9%), CO₂ (0.03%), and some trace inert gases. Therefore it should be born in mind that the value that is normally called the nitrogen content actually is the inert gas content.

². m³/hr refers to conditions at 1013 mbar(a) and 20°C

Ambient Conditions

Ambient temperature	+2°C to +45°C*
Ambient pressure	atmospheric
Air quality	clean air without contaminants

*Maximum inlet temperature, 35°C when operating at 13 bar g.

Feed-air Conditions

Maximum operating pressure	13 bar g**
Min. / Max. operating temperature	+2°C / +45°C*
Maximum oil vapour content	<0.01 mg/m ³
Particles	filtered at 0.01 µm cut off
Relative humidity	<100% (non condensing)

**Maximum inlet temperature, 35°C when operating at 13 bar g.

**Maximum inlet pressure, 10 bar g when operating at 45°C.

Flow Rate Corrections

Nitrogen flow rate at feed temperatures other than 20°C	Use bulletin S3.1.059*
Feed-air consumption at feed-air temperatures other than 20°C	Use bulletin S3.1.059*


*Revision number may vary, make sure to use the most recent revision.

*Revision number may vary, make sure to use the most recent Revision

Note

Parker membrane systems produce both nitrogen and oxygen enriched air. Nitrogen enriched air can cause suffocation and oxygen enriched air causes increased fire hazards. The oxygen enriched air is available at ambient pressure and pressure build-up of enriched oxygen at the outlet must be prevented, otherwise a serious (reversible) decrease in performance will result. The nitrogen enriched air produced should be treated as pressurised air.

HiFluxx ST504

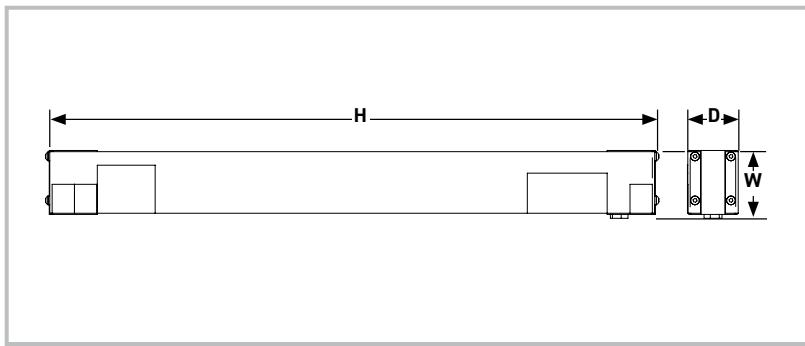

Performance data

Performance data is based on 20°C feed-air temperature and 1013 mbar ambient pressure

Purity % ¹	Minimum nitrogen flow rate in m ³ /hr ²				
	99	98	97	96	95
4 bar g	0.20	0.33	0.47	0.61	0.75
5 bar g	0.27	0.46	0.65	0.84	1.03
6 bar g	0.36	0.60	0.83	1.07	1.31
7 bar g	0.41	0.71	1.01	1.29	1.57
8 bar g	0.48	0.83	1.18	1.52	1.86
9 bar g	0.55	0.95	1.35	1.75	2.14
10 bar g	0.62	1.07	1.52	1.96	2.39
11 bar g	0.68	1.19	1.69	2.17	2.65
12 bar g	0.75	1.30	1.86	2.38	2.90
13 bar g	0.81	1.42	2.04	2.59	3.15

Maximum pressure drop <0.3 bar.

Maximum nitrogen flow rate = minimum flow rate + 30%.

1. Parker membranes separate oxygen from pressurised air. The composition of the product is determined by measuring the residual oxygen content. The nitrogen content is calculated by subtracting the residual oxygen content from 100%. Air is composed of nitrogen (78.1%), oxygen (20.9%), Argon (0.9%), CO₂ (0.03%), and some trace inert gases. Therefore it should be born in mind that the value that is normally called the nitrogen content actually is the inert gas content.

2. m³/hr refers to conditions at 1013 mbar(a) and 20°C

Purity % ¹	Feed-air consumption at minimum nitrogen flow rate in m ³ /hr ²				
	99	98	97	96	95
4 bar g	1.57	1.70	1.84	2.01	2.17
5 bar g	1.94	2.12	2.37	2.63	2.82
6 bar g	2.38	2.56	3.00	3.31	3.53
7 bar g	2.78	3.06	3.54	3.81	4.17
8 bar g	3.24	3.55	4.13	4.45	4.91
9 bar g	3.73	4.06	4.72	5.12	5.66
10 bar g	4.23	4.60	5.33	5.77	6.35
11 bar g	4.78	5.19	5.97	6.46	7.06
12 bar g	5.39	5.83	6.64	7.21	7.78
13 bar g	6.07	6.55	7.36	8.03	8.53

Ambient temperature	+2°C to +45°C*
Ambient pressure	atmospheric
Air quality	clean air without contaminants

*Maximum inlet temperature, 35°C when operating at 13 bar g.

Material

Housing	Steel
Tube	Aluminum
Coating (housing)	ESPC to RAL 7035 (Light Grey)
Coating (tube)	None

Services Available on Request

3D model CAD STEP file

Test Report


Weight, Dimensions and Connections

Dimensions H x W x D	520 x 80 x 63 mm
Weight	2.6 kg
Connection feed-air	G ³ / ₈ female to ISO 228
Connection nitrogen enriched air	G ³ / ₈ female to ISO 228
Connection oxygen enriched air at atmospheric pressure	G ³ / ₈ female to ISO 228
Dimensional drawing	Refer to K3.1.380

Note

Parker membrane systems produce both nitrogen and oxygen enriched air. Nitrogen enriched air can cause suffocation and oxygen enriched air causes increased fire hazards. The oxygen enriched air is available at ambient pressure and pressure build-up of enriched oxygen at the outlet must be prevented, otherwise a serious (reversible) decrease in performance will result. The nitrogen enriched air produced should be treated as pressurised air.

HiFluxx ST604

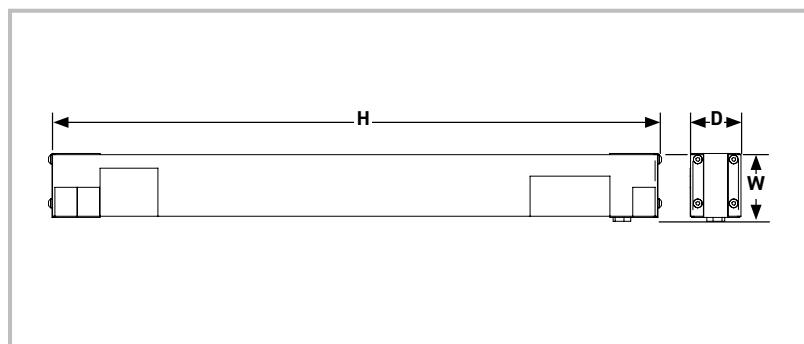

Performance data

Performance data is based on 20°C feed-air temperature and 1013 mbar ambient pressure

Purity % ¹	Minimum nitrogen flow rate in m ³ /hr ²				
	99	98	97	96	95
4 bar g	0.39	0.65	0.88	1.11	1.40
5 bar g	0.48	0.81	1.10	1.39	1.74
6 bar g	0.61	1.05	1.42	1.80	2.19
7 bar g	0.72	1.22	1.66	2.10	2.56
8 bar g	0.82	1.39	1.90	2.40	2.92
9 bar g	0.93	1.61	2.19	2.77	3.39
10 bar g	1.02	1.74	2.37	3.00	3.65
11 bar g	1.12	1.91	2.62	3.33	4.07
12 bar g	1.22	2.09	2.87	3.66	4.48

Maximum pressure drop <0.3 bar.

Maximum nitrogen flow rate = minimum flow rate + 30%

¹. Parker membranes separate oxygen from pressurised air. The composition of the product is determined by measuring the residual oxygen content. The nitrogen content is calculated by subtracting the residual oxygen content from 100%. Air is composed of nitrogen (78.1%), oxygen (20.9%), Argon (0.9%), CO₂ (0.03%), and some trace inert gases. Therefore it should be born in mind that the value that is normally called the nitrogen content actually is the inert gas content.

². m³/hr refers to conditions at 1013mbar(a) and 20°C

Ambient Conditions

Ambient temperature	+2°C to +45°C*
Ambient pressure	atmospheric
Air quality	clean air without contaminants

*Maximum inlet temperature, 35°C when operating at 13 bar g.

Feed-air Conditions

Maximum operating pressure	13 bar g**
Min. / Max. operating temperature	+2°C / +45°C*
Maximum oil vapour content	<0.01 mg/m ³
Particles	filtered at 0.01 µm cut off
Relative humidity	<100% (non condensing)

*Maximum inlet temperature, 35°C when operating at 13 bar g.

**Maximum inlet pressure, 10 bar g when operating at 45°C.

Flow Rate Corrections


Nitrogen flow rate at feed temperatures other than 20°C	Use bulletin S3.1.059*
Feed-air consumption at feed-air temperatures other than 20°C	Use bulletin S3.1.059*

*Revision number may vary, make sure to use the most recent Revision

Note

Parker membrane systems produce both nitrogen and oxygen enriched air. Nitrogen enriched air can cause suffocation and oxygen enriched air causes increased fire hazards. The oxygen enriched air is available at ambient pressure and pressure build-up of enriched oxygen at the outlet must be prevented, otherwise a serious (reversible) decrease in performance will result. The nitrogen enriched air produced should be treated as pressurised air.

HiFluxx DT604

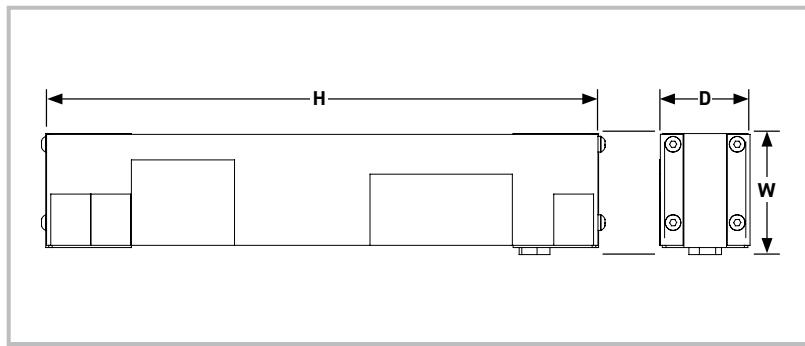

Performance data

Performance data is based on 20°C feed-air temperature and 1013 mbar ambient pressure

Purity % ¹	Minimum nitrogen flow rate in m ³ /hr ²					
	99.5	99	98	97	96	95
4 bar g	1.05	1.55	2.32	3.06	3.75	4.49
5 bar g	1.32	1.94	2.90	3.83	4.69	5.62
6 bar g	1.62	2.41	3.64	4.82	6.02	7.20
7 bar g	1.89	2.81	4.25	5.62	7.02	8.40
8 bar g	2.16	3.22	4.85	6.42	8.02	9.60
9 bar g	2.41	3.60	5.54	7.23	8.97	11.1
10 bar g	2.71	4.02	6.07	8.03	10.0	12.0
11 bar g	2.89	4.31	6.62	8.80	10.9	13.2
12 bar g	3.07	4.60	7.17	9.58	11.8	14.3

Maximum pressure drop <0.8 bar.

Maximum nitrogen flow rate = minimum flow rate + 10%

1. Parker membranes separate oxygen from pressurised air. The composition of the product is determined by measuring the residual oxygen content. The nitrogen content is calculated by subtracting the residual oxygen content from 100 %. Air is composed of nitrogen (78.1%), oxygen (20.9%), Argon (0.9%), CO₂ (0.03%), and some trace inert gases. Therefore it should be born in mind that the value that is normally called the nitrogen content actually is the inert gas content.

2. m³/hr refers to conditions at 1013mbar(a) and 20°C

Ambient Conditions

Ambient temperature	+2°C to +45°C*
Ambient pressure	atmospheric
Air quality	clean air without contaminants

*Maximum inlet temperature, 35°C when operating at 13 bar g.

Feed-air Conditions

Maximum operating pressure	13 bar g**
Min. / Max. operating temperature	+2°C / +45°C*
Maximum oil vapour content	<0.01 mg/m ³
Particles	filtered at 0.01 µm cut off
Relative humidity	<100% (non condensing)

*Maximum inlet temperature, 35°C when operating at 13 bar g.

**Maximum inlet pressure, 10 bar g when operating at 45°C.

Flow Rate Corrections

Nitrogen flow rate at feed temperatures other than 20°C	Use bulletin S3.1.059*
Feed-air consumption at feed-air temperatures other than 20°C	Use bulletin S3.1.059*

*Revision number may vary, make sure to use the most recent Revision

Purity %	Feed-air consumption at minimum nitrogen flow rate in m ³ /hr ²					
	99.5	99	98	97	96	95
4 bar g	8.21	8.68	9.51	10.4	11.2	12.1
5 bar g	10.3	10.8	11.9	13.0	14.1	15.2
6 bar g	12.5	13.5	14.9	16.4	17.4	18.7
7 bar g	14.6	15.8	17.4	19.1	20.4	21.8
8 bar g	16.7	18.0	19.9	21.8	23.3	25.0
9 bar g	19.3	20.5	22.7	24.6	26.9	28.8
10 bar g	21.6	22.9	24.9	27.3	30.1	31.2
11 bar g	24.6	26.3	28.5	30.8	33.8	35.6
12 bar g	26.1	28.1	30.8	33.5	36.5	38.7

Material

Housing	Aluminum
---------	----------

Services on Request

Material certificates EN10204-3.1 on housing material (for Stainless Steel only)
3D model CAD STEP file


Weight, Dimensions and Connections

Dimensions H x W x D	758 x 145 x 63 mm
Weight	6.0 kg
Connection inlet / outlet	G¾ female
Vent	G¾ female
Dimensional drawing	Refer to K3.1.350

Note

Parker membrane systems produce both nitrogen and oxygen enriched air. Nitrogen enriched air can cause suffocation and oxygen enriched air causes increased fire hazards. The oxygen enriched air is available at ambient pressure and pressure build-up of enriched oxygen at the outlet must be prevented, otherwise a serious (reversible) decrease in performance will result. The nitrogen enriched air produced should be treated as pressurised air.

HiFluxx TT604

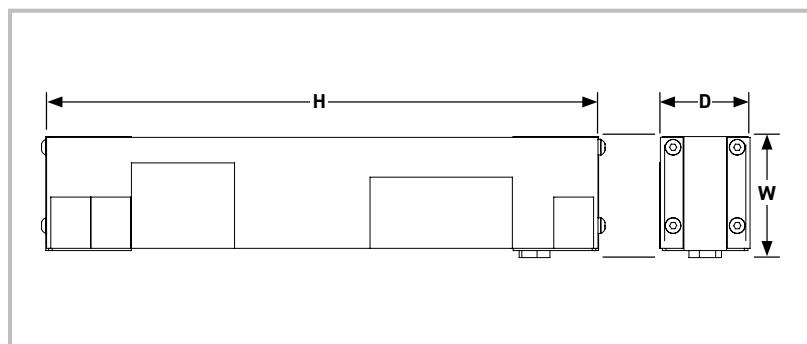

Performance data

Performance data is based on 20°C feed-air temperature and 1013 mbar ambient pressure

Purity % ¹	Minimum nitrogen flow rate in m ³ /hr ²					
	99.5	99	98	97	96	95
4 bar g	1.05	1.55	2.32	3.06	3.75	4.49
5 bar g	1.32	1.94	2.90	3.83	4.69	5.62
6 bar g	1.62	2.41	3.64	4.82	6.02	7.20
7 bar g	1.89	2.81	4.25	5.62	7.02	8.40
8 bar g	2.16	3.22	4.85	6.42	8.02	9.60
9 bar g	2.41	3.60	5.54	7.23	8.97	11.1
10 bar g	2.71	4.02	6.07	8.03	10.0	12.0
11 bar g	2.89	4.31	6.62	8.80	10.9	13.2
12 bar g	3.07	4.60	7.17	9.58	11.8	14.3

Maximum pressure drop < 0.8 bar.

Maximum nitrogen flow rate = minimum flow rate + 10%

¹. Parker membranes separate oxygen from pressurised air. The composition of the product is determined by measuring the residual oxygen content. The nitrogen content is calculated by subtracting the residual oxygen content from 100%. Air is composed of nitrogen (78.1%), oxygen (20.9%), Argon (0.9%), CO₂ (0.03%), and some trace inert gases. Therefore it should be born in mind that the value that is normally called the nitrogen content actually is the inert gas content.

². m³/hr refers to conditions at 1013mbar(a) and 20°C

Ambient Conditions

Ambient temperature	+2°C to +45°C*
Ambient pressure	atmospheric
Air quality	clean air without contaminants

*Maximum inlet temperature, 35°C when operating at 13 bar g.

Feed-air Conditions

Maximum operating pressure	13 bar g**
Min. / Max. operating temperature	+2°C / +45°C*
Maximum oil vapour content	<0.01 mg/m ³
Particles	filtered at 0.01 µm cut off
Relative humidity	<100% (non condensing)

*Maximum inlet temperature, 35°C when operating at 13 bar g.

**Maximum inlet pressure, 10 bar g when operating at 45°C.

Flow Rate Corrections


Nitrogen flow rate at feed temperatures other than 20°C	Use bulletin S3.1.059*
Feed-air consumption at feed-air temperatures other than 20°C	Use bulletin S3.1.059*

* Revision number may vary, make sure to use the most recent Revision

Note

Parker membrane systems produce both nitrogen and oxygen enriched air. Nitrogen enriched air can cause suffocation and oxygen enriched air causes increased fire hazards. The oxygen enriched air is available at ambient pressure and pressure build-up of enriched oxygen at the outlet must be prevented, otherwise a serious (reversible) decrease in performance will result. The nitrogen enriched air produced should be treated as pressurised air.

HiFluxx ST606

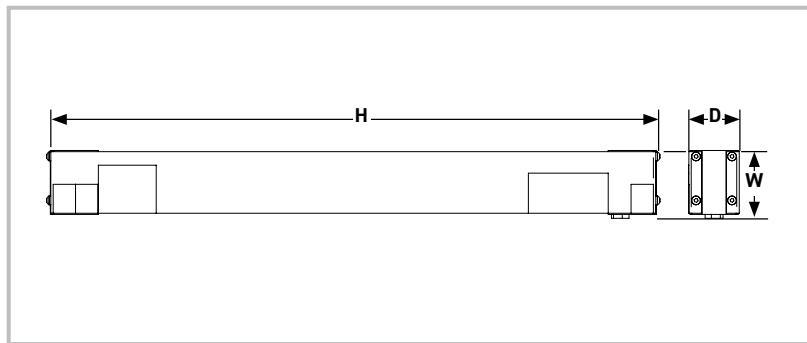

Performance data

Performance data is based on 20°C feed-air temperature and 1013 mbar ambient pressure

Purity % ¹	Minimum nitrogen flow rate in m ³ /hr ²				
	99	98	97	96	95
4 bar g	0.77	1.25	1.71	2.13	2.63
5 bar g	0.96	1.56	2.14	2.66	3.28
6 bar g	1.20	1.98	2.70	3.41	4.19
7 bar g	1.40	2.31	3.15	3.98	4.89
8 bar g	1.60	2.64	3.60	4.55	5.59
9 bar g	1.80	3.00	4.08	5.17	6.41
10 bar g	2.00	3.30	4.49	5.69	6.99
11 bar g	2.10	3.56	4.87	6.18	7.61
12 bar g	2.20	3.82	5.24	6.68	8.23

Maximum pressure drop <0.3 bar.

Maximum nitrogen flow rate = minimum flow rate + 30%

1. Parker membranes separate oxygen from pressurised air. The composition of the product is determined by measuring the residual oxygen content. The nitrogen content is calculated by subtracting the residual oxygen content from 100 %. Air is composed of nitrogen (78.1%), oxygen (20.9 %), Argon (0.9 %), CO₂ (0.03 %), and some trace inert gases. Therefore it should be born in mind that the value that is normally called the nitrogen content actually is the inert gas content.

2. m³/hr refers to conditions at 1013mbar(a) and 20 °C

Ambient Conditions

Ambient temperature	+2°C to +50°C
Ambient pressure	atmospheric
Air quality	clean air without contaminants

Feed-air Conditions

Maximum operating pressure	13.0 bar g
Min. / Max. operating temperature	+2°C / +50°C
Maximum oil vapour content	<0.01 mg/m ³
Particles	filtered at 0.01 µm cut off
Relative humidity	<100% (non condensing)

Flow Rate Corrections

Nitrogen flow rate at feed temperatures other than 20°C	Use bulletin S3.1.059*
Feed-air consumption at feed-air temperatures other than 20°C	Use bulletin S3.1.059*

* Revision number may vary, make sure to use the most recent Revision

Purity %	Feed-air consumption at minimum nitrogen flow rate in m ³ /hr ²				
	99	98	97	96	95
4 bar g	4.85	5.37	5.99	6.39	6.83
5 bar g	6.07	6.72	7.49	7.99	8.54
6 bar g	7.45	8.52	9.44	10.24	10.9
7 bar g	8.69	9.94	11.0	11.9	12.7
8 bar g	9.93	11.4	12.6	13.6	14.5
9 bar g	11.3	12.9	14.3	15.5	16.7
10 bar g	12.6	14.2	15.7	17.1	18.2
11 bar g	14.5	16.0	17.5	19.2	20.5
12 bar g	15.2	17.2	18.9	20.7	22.2

Material

Connection block	Aluminium
Tube	PVC

Services on Request

3D model CAD STEP file


Weight, Dimensions and Connections

Dimensions H x W x D	751 x 110 x 84 mm
Weight	6.4 kg
Connection inlet / outlet	G½ female
Vent	G½ female
Dimensional drawing	Refer to K3.1.345

Note

Parker membrane systems produce both nitrogen and oxygen enriched air. Nitrogen enriched air can cause suffocation and oxygen enriched air causes increased fire hazards. The oxygen enriched air is available at ambient pressure and pressure build-up of enriched oxygen at the outlet must be prevented, otherwise a serious (reversible) decrease in performance will result. The nitrogen enriched air produced should be treated as pressurised air.

HiFluxx TT606

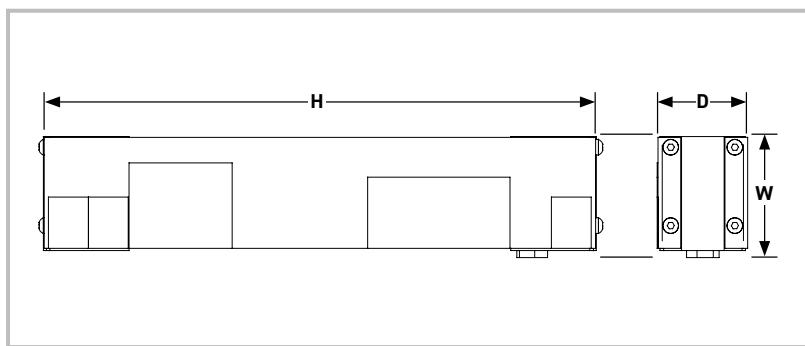

Performance data

Performance data is based on 20°C feed-air temperature and 1013 mbar ambient pressure

Purity % ¹	Minimum nitrogen flow rate in m ³ /hr ²					
	99.5	99	98	97	96	95
4 bar g	1.90	2.74	4.12	5.40	6.70	8.07
5 bar g	2.38	3.42	5.15	6.75	8.38	10.1
6 bar g	2.93	4.34	6.53	8.64	10.6	12.8
7 bar g	3.42	5.06	7.62	10.1	12.4	15.0
8 bar g	3.91	5.78	8.71	11.5	14.2	17.1
9 bar g	4.48	6.63	10.1	13.3	16.4	19.5
10 bar g	4.89	7.23	10.9	14.4	17.7	21.4
11 bar g	5.27	7.88	12.0	15.8	19.7	23.8
12 bar g	5.65	8.54	13.1	17.2	21.6	26.2

Maximum pressure drop <0.8 bar.

Maximum nitrogen flow rate = minimum flow rate + 10%

¹. Parker membranes separate oxygen from pressurised air. The composition of the product is determined by measuring the residual oxygen content. The nitrogen content is calculated by subtracting the residual oxygen content from 100 %. Air is composed of nitrogen (78.1%), oxygen (20.9 %), Argon (0.9 %), CO₂ (0.03 %), and some trace inert gases. Therefore it should be born in mind that the value that is normally called the nitrogen content actually is the inert gas content.

². m³/hr refers to conditions at 1013mbar(a) and 20 °C

Ambient Conditions

Ambient temperature	+2°C to +50°C
Ambient pressure	atmospheric
Air quality	clean air without contaminants

Feed-air Conditions

Maximum operating pressure	13.0 bar g
Min. / Max. operating temperature	+2°C / +50°C
Maximum oil vapour content	<0.01 mg/m ³
Particles	filtered at 0.01 µm cut off
Relative humidity	<100% (non condensing)

Flow Rate Corrections

Nitrogen flow rate at feed temperatures other than 20°C	Use bulletin S3.1.059*
Feed-air consumption at feed-air temperatures other than 20°C	Use bulletin S3.1.059*

* Revision number may vary, make sure to use the most recent Revision

Material

Connection block	Aluminum
Tube	PVC

Services on Request

3D model CAD STEP file


Weight, Dimensions and Connections

Dimensions H x W x D	751 x 270 x 83 mm
Weight	15 kg
Connection inlet / outlet	G½ female
Vent	G½ female
Dimensional drawing	Refer to K3.1.354

Note

Parker membrane systems produce both nitrogen and oxygen enriched air. Nitrogen enriched air can cause suffocation and oxygen enriched air causes increased fire hazards. The oxygen enriched air is available at ambient pressure and pressure build-up of enriched oxygen at the outlet must be prevented, otherwise a serious (reversible) decrease in performance will result. The nitrogen enriched air produced should be treated as pressurised air.

HiFluxx ST608

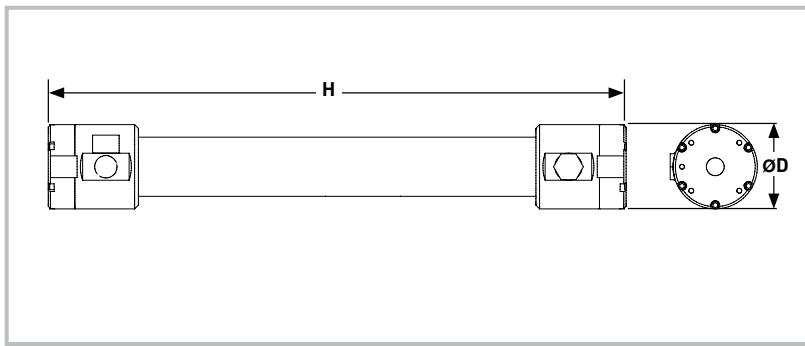

Performance data

Performance data is based on 20°C feed-air temperature and 1013 mbar ambient pressure

Purity % ¹	Minimum nitrogen flow rate in m ³ /hr ²				
	99	98	97	96	95
4 bar g	1.34	2.25	3.07	3.87	4.82
5 bar g	1.67	2.81	3.84	4.84	6.02
6 bar g	2.14	3.72	4.99	6.48	7.91
7 bar g	2.49	4.34	5.82	7.56	9.23
8 bar g	2.85	4.96	6.65	8.65	10.6
9 bar g	3.36	5.81	7.85	10.0	12.2
10 bar g	3.56	6.21	8.32	10.8	13.2
11 bar g	4.01	6.96	9.46	12.2	14.9
12 bar g	4.46	7.71	10.6	13.5	16.6

Maximum pressure drop <0.3 bar.

Maximum nitrogen flow rate = minimum flow rate + 30%

¹. Parker membranes separate oxygen from pressurised air. The composition of the product is determined by measuring the residual oxygen content. The nitrogen content is calculated by subtracting the residual oxygen content from 100 %. Air is composed of nitrogen (78.1%), oxygen (20.9 %), Argon (0.9 %), CO₂ (0.03 %), and some trace inert gases. Therefore it should be born in mind that the value that is normally called the nitrogen content actually is the inert gas content.

². m³/hr refers to conditions at 1013mbar(a) and 20 °C

Ambient Conditions

Ambient temperature	+2°C to +50°C
Ambient pressure	atmospheric
Air quality	clean air without contaminants

Feed-air Conditions

Maximum operating pressure	13.0 bar g
Min. / Max. operating temperature	+2°C / +50°C
Maximum oil vapour content	<0.01 mg/m ³
Particles	filtered at 0.01 µm cut off
Relative humidity	<100% (non condensing)

Flow Rate Corrections

Nitrogen flow rate at feed temperatures other than 20°C	Use bulletin S3.1.059*
Feed-air consumption at feed-air temperatures other than 20°C	Use bulletin S3.1.059*

* Revision number may vary, make sure to use the most recent Revision

Purity %	Feed-air consumption at minimum nitrogen flow rate in m ³ /hr ²				
	99	98	97	96	95
4 bar g	9.08	10.1	11.1	12.0	13.0
5 bar g	11.4	12.7	13.8	15.0	16.3
6 bar g	14.1	16.0	17.5	19.5	20.6
7 bar g	16.5	18.7	20.4	22.7	24.0
8 bar g	18.8	21.3	23.3	25.9	27.4
9 bar g	21.8	25.0	27.5	30.0	31.8
10 bar g	23.2	26.7	29.1	32.4	34.3
11 bar g	27.7	31.3	34.1	36.5	40.2
12 bar g	30.8	34.7	38.2	40.6	44.9

Material

Housing	Aluminum
---------	----------

Services on Request

3D model CAD STEP file


Weight, Dimensions and Connections

Dimensions H x Ø D	736 x 114 mm
Weight	5.3 kg
Connection inlet / outlet	G¾ female
Vent	G1 female
Dimensional drawing	Refer to K3.1.346

Note

Parker membrane systems produce both nitrogen and oxygen enriched air. Nitrogen enriched air can cause suffocation and oxygen enriched air causes increased fire hazards. The oxygen enriched air is available at ambient pressure and pressure build-up of enriched oxygen at the outlet must be prevented, otherwise a serious (reversible) decrease in performance will result. The nitrogen enriched air produced should be treated as pressurised air.

HiFluxx ST6010

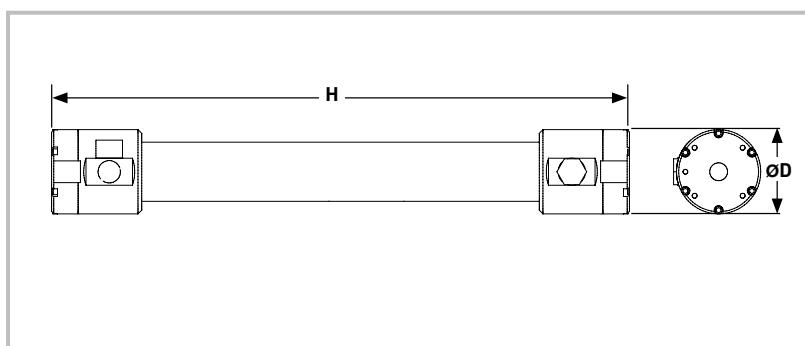

Performance data

Performance data is based on 20°C feed-air temperature and 1013 mbar ambient pressure

Purity % ¹	Minimum nitrogen flow rate in m ³ /hr ²				
	99	98	97	96	95
4 bar g	2.21	3.61	4.92	6.28	7.76
5 bar g	2.76	4.52	6.15	7.85	9.70
6 bar g	3.39	5.92	8.02	10.2	12.8
7 bar g	3.96	6.90	9.35	12.0	14.9
8 bar g	4.52	7.89	10.7	13.7	17.1
9 bar g	5.39	9.01	12.3	15.7	19.2
10 bar g	5.66	9.86	13.4	17.1	21.3
11 bar g	6.24	10.8	14.8	18.9	23.6
12 bar g	6.83	11.7	16.2	20.8	25.8

Maximum pressure drop <0.3 bar.

Maximum nitrogen flow rate = minimum flow rate + 30%

¹. Parker membranes separate oxygen from pressurised air. The composition of the product is determined by measuring the residual oxygen content. The nitrogen content is calculated by subtracting the residual oxygen content from 100 %. Air is composed of nitrogen (78.1%), oxygen (20.9 %), Argon (0.9 %), CO₂ (0.03 %), and some trace inert gases. Therefore it should be born in mind that the value that is normally called the nitrogen content actually is the inert gas content.

². m³/hr refers to conditions at 1013mbar(a) and 20 °C

Ambient Conditions

Ambient temperature	+2°C to +50°C
Ambient pressure	atmospheric
Air quality	clean air without contaminants

Feed-air Conditions

Maximum operating pressure	13.0 bar g ³
Min. / Max. operating temperature	+2°C / +50°C ³
Maximum oil vapour content	<0.01 mg/m ³
Particles	filtered at 0.01 µm cut off
Relative humidity	<100% (non condensing)

³ combination of high operating pressure and high operating temperature can reduce the life time expectancy of the membrane module

Flow Rate Corrections

Nitrogen flow rate at feed temperatures other than 20°C	Use bulletin S3.1.059*
Feed-air consumption at feed-air temperatures other than 20°C	Use bulletin S3.1.059*

* Revision number may vary, make sure to use the most recent Revision

Mechanical Design Housing

Design pressure	15 bar g
Design temperature	50°C

membrane operating limits are lower

Material

Housing	Aluminum
---------	----------

Services on Request

3D model CAD STEP file


Weight, Dimensions and Connections

Dimensions H x Ø D	736 x 139 mm
Weight	8.1 kg
Connection inlet / outlet	G1 female
Vent	G1 female
Dimensional drawing	Refer to K3.1.347

Note

Parker membrane systems produce both nitrogen and oxygen enriched air. Nitrogen enriched air can cause suffocation and oxygen enriched air causes increased fire hazards. The oxygen enriched air is available at ambient pressure and pressure build-up of enriched oxygen at the outlet must be prevented, otherwise a serious (reversible) decrease in performance will result. The nitrogen enriched air produced should be treated as pressurised air.

HiFluxx ST1506

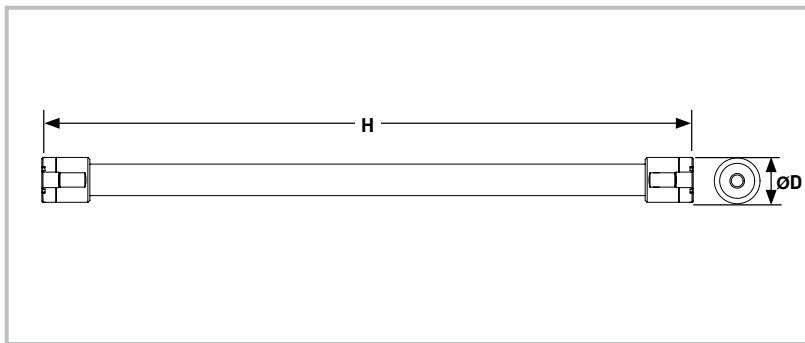

Performance data

Performance data is based on 20°C feed-air temperature and 1013 mbar ambient pressure

Purity % ¹	Minimum nitrogen flow rate in m ³ /hr ²					
	99.5	99	98	97	96	95
4 bar g	1.06	1.45	2.29	3.17	4.05	5.02
5 bar g	1.56	2.15	3.38	4.68	5.98	7.41
6 bar g	2.04	2.81	4.42	6.12	7.82	9.69
7 bar g	2.40	3.30	5.20	7.20	9.20	11.4
8 bar g	2.88	3.96	6.24	8.64	11.0	13.7
9 bar g	3.36	4.62	7.28	10.1	12.9	16.0
10 bar g	3.84	5.28	8.32	11.5	14.7	18.2
11 bar g	4.32	5.94	9.36	13.0	16.6	20.5
12 bar g	4.80	6.60	10.4	14.4	18.4	22.8
13 bar g	5.04	6.93	10.9	15.1	19.3	23.9

Maximum pressure drop <0.3 bar.

Maximum nitrogen flow rate = minimum flow rate + 30%

¹. Parker membranes separate oxygen from pressurised air. The composition of the product is determined by measuring the residual oxygen content. The nitrogen content is calculated by subtracting the residual oxygen content from 100 %. Air is composed of nitrogen (78.1%), oxygen (20.9 %), Argon (0.9 %), CO₂ (0.03 %), and some trace inert gases. Therefore it should be born in mind that the value that is normally called the nitrogen content actually is the inert gas content.

². m³/hr refers to conditions at 1013mbar(a) and 20 °C

Purity %	Feed-air consumption at minimum nitrogen flow rate in m ³ /hr ²					
	99.5	99	98	97	96	95
4 bar g	8.98	9.15	9.84	11.1	12.1	13.0
5 bar g	13.3	13.5	14.5	16.4	17.9	19.3
6 bar g	17.3	17.7	19.0	21.4	23.5	25.2
7 bar g	20.4	20.8	22.4	25.2	27.6	29.6
8 bar g	24.5	24.9	26.8	30.2	33.1	35.6
9 bar g	28.6	29.1	31.3	35.3	38.6	41.5
10 bar g	32.6	33.3	35.8	40.3	44.2	47.4
11 bar g	36.7	37.4	40.2	45.4	49.7	53.4
12 bar g	40.8	41.6	44.7	50.4	55.2	59.3
13 bar g	42.8	43.7	47.0	52.9	58.0	62.2

Ambient Conditions

Ambient temperature	+2°C to +50°C
Ambient pressure	atmospheric
Air quality	clean air without contaminants

Feed-air Conditions

Maximum operating pressure	13.0 bar g
Min. / Max. operating temperature	+2°C / +50°C
Maximum oil vapour content	<0.01 mg/m ³
Particles	filtered at 0.01 µm cut off
Relative humidity	<100% (non condensing)

Flow Rate Corrections

Nitrogen flow rate at feed temperatures other than 20°C	Use bulletin S3.1.059*
Feed-air consumption at feed-air temperatures other than 20°C	Use bulletin S3.1.059*

* Revision number may vary, make sure to use the most recent Revision

Mechanical Design Housing

Design pressure	15 bar g
Design temperature	65°C

membrane operating limits are lower

Material

Housing	Aluminum
---------	----------

Services on Request

Material certificates EN10204-3.1 on housing material (for Stainless Steel only)
3D model CAD STEP file


Weight, Dimensions and Connections

Dimensions H x Ø D	1655 x 100 mm
Weight	5.7 kg
Connection inlet / outlet	G¾ female
Vent	G1 female
Dimensional drawing	Refer to K3.1.334

Note

Parker membrane systems produce both nitrogen and oxygen enriched air. Nitrogen enriched air can cause suffocation and oxygen enriched air causes increased fire hazards. The oxygen enriched air is available at ambient pressure and pressure build-up of enriched oxygen at the outlet must be prevented, otherwise a serious (reversible) decrease in performance will result. The nitrogen enriched air produced should be treated as pressurised air.

HiFluxx DT1506-8

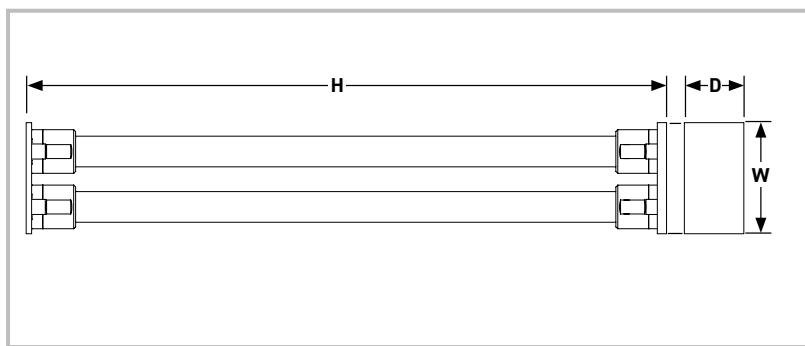

Performance data

Performance data is based on 20°C feed-air temperature and 1013 mbar ambient pressure

Purity % ¹	Minimum nitrogen flow rate in m ³ /hr ²					
	99.5	99	98	97	96	95
4 bar g	2.31	3.63	6.25	8.58	10.9	13.2
5 bar g	3.41	5.36	9.23	12.7	16.1	19.5
6 bar g	4.46	7.01	12.1	16.6	21.0	25.5
7 bar g	5.25	8.25	14.2	19.5	24.7	30.0
8 bar g	6.30	9.90	17.0	23.4	29.6	36.0
9 bar g	7.35	11.6	19.9	27.3	34.6	42.0
10 bar g	8.40	13.2	22.7	31.2	39.5	48.0
11 bar g	9.45	14.9	25.6	35.1	44.5	54.0
12 bar g	10.5	16.5	28.4	39.0	49.4	60.0
13 bar g	11.0	17.3	29.8	41.0	51.9	63.0

Maximum pressure drop <0.8 bar.

Maximum nitrogen flow rate = minimum flow rate + 10%

¹. Parker membranes separate oxygen from pressurised air. The composition of the product is determined by measuring the residual oxygen content. The nitrogen content is calculated by subtracting the residual oxygen content from 100 %. Air is composed of nitrogen (78.1%), oxygen (20.9%), Argon (0.9%), CO₂ (0.03%), and some trace inert gases. Therefore it should be born in mind that the value that is normally called the nitrogen content actually is the inert gas content.

². m³/hr refers to conditions at 1013mbar(a) and 20 °C

Ambient Conditions

Ambient temperature	+2°C to +50°C
Ambient pressure	atmospheric
Air quality	clean air without contaminants

Feed-air Conditions

Maximum operating pressure	13.0 bar g
Min. / Max. operating temperature	+2°C / +50°C
Maximum oil vapour content	<0.01 mg/m ³
Particles	filtered at 0.01 µm cut off
Relative humidity	<100% (non condensing)

Flow Rate Corrections

Nitrogen flow rate at feed temperatures other than 20°C	Use bulletin S3.1.059*
Feed-air consumption at feed-air temperatures other than 20°C	Use bulletin S3.1.059*

* Revision number may vary, make sure to use the most recent Revision

Purity %	Feed-air consumption at minimum nitrogen flow rate in m ³ /hr ²					
	99.5	99	98	97	96	95
4 bar g	19.6	22.9	26.9	30.0	32.6	34.3
5 bar g	29.0	33.8	39.7	44.4	48.2	50.7
6 bar g	37.9	44.2	51.9	58.0	63.0	66.3
7 bar g	44.6	52.0	61.1	68.3	74.1	78.0
8 bar g	53.6	62.4	73.3	81.9	88.9	93.6
9 bar g	62.5	72.8	85.5	95.6	104	109
10 bar g	71.4	83.2	97.7	109	119	125
11 bar g	80.3	93.6	110	123	133	140
12 bar g	89.3	104	122	137	148	156
13 bar g	93.7	109	128	143	156	164

Mechanical Design Housing

Design pressure	13 bar g
Design temperature	50°C

membrane operating limits are lower

Material

Housing	Aluminum
---------	----------

Services on Request

Material certificates EN10204-3.1 on housing material (for Stainless Steel only)
3D model CAD STEP file


Weight, Dimensions and Connections

Model	4 - 8 bar g	9 - 13 bar g
Dimensions H x W x D (mm)	1705 x 296 x 208	1732 x 296 x 208
Weight	15 kg	15 kg
Connection inlet / outlet	G¾ female	G¾ female
Vent	G1 female	2 x G1 female
Dimensional drawing	Refer to K3.1.356	Refer to K3.1.357

Note

Parker membrane systems produce both nitrogen and oxygen enriched air. Nitrogen enriched air can cause suffocation and oxygen enriched air causes increased fire hazards. The oxygen enriched air is available at ambient pressure and pressure build-up of enriched oxygen at the outlet must be prevented, otherwise a serious (reversible) decrease in performance will result. The nitrogen enriched air produced should be treated as pressurised air.

HiFluxx ST1508

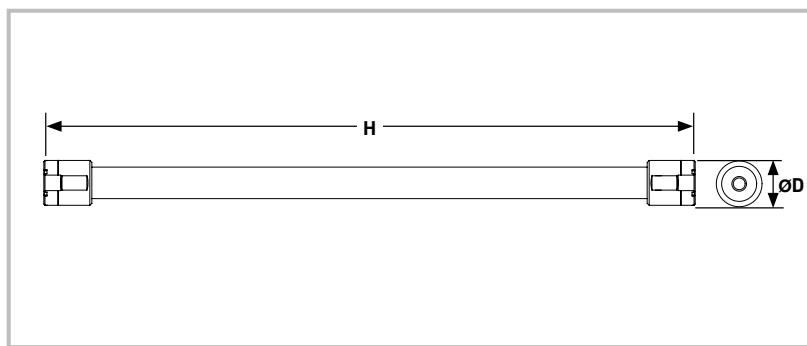

Purity % ¹	Minimum nitrogen flow rate in m ³ /hr ²					
	99.5	99	98	97	96	95
4 bar g	2.07	2.95	4.84	6.60	8.8	11.0
5 bar g	3.06	4.36	7.15	9.75	13.0	16.3
6 bar g	4.00	5.70	9.35	12.8	17.0	21.3
7 bar g	4.70	6.70	11.0	15.0	20.0	25.0
8 bar g	5.17	7.37	12.1	16.5	22.0	27.5
9 bar g	6.11	8.71	14.3	19.5	26.0	32.5
10 bar g	6.58	9.38	15.4	21.0	28.0	35.0
11 bar g	7.52	10.7	17.6	24.0	32.0	40.0
12 bar g	7.99	11.4	18.7	25.5	34.0	42.5
13 bar g	8.46	12.1	19.8	27.0	36.0	45.0

Maximum pressure drop <0.3 bar.

Maximum nitrogen flow rate = minimum flow rate + 30%

¹ Parker membranes separate oxygen from pressurised air. The composition of the product is determined by measuring the residual oxygen content. The nitrogen content is calculated by subtracting the residual oxygen content from 100 %. Air is composed of nitrogen (78.1%), oxygen (20.9%), Argon (0.9%), CO₂ (0.03 %), and some trace inert gases. Therefore it should be born in mind that the value that is normally called the nitrogen content actually is the inert gas content.

² m³/hr refers to conditions at 1013mbar(a) and 20 °C

Ambient Conditions

Ambient temperature	+2°C to +50°C
Ambient pressure	atmospheric
Air quality	clean air without contaminants

Feed-air Conditions

Maximum operating pressure	13.0 bar g
Min. / Max. operating temperature	+2°C / +50°C
Maximum oil vapour content	<0.01 mg/m ³
Particles	filtered at 0.01 µm cut off
Relative humidity	<100% (non condensing)

Flow Rate Corrections

Nitrogen flow rate at feed temperatures other than 20°C	Use bulletin S3.1.059*
Feed-air consumption at feed-air temperatures other than 20°C	Use bulletin S3.1.059*

* Revision number may vary, make sure to use the most recent Revision

Purity %	Feed-air consumption at minimum nitrogen flow rate in m ³ /hr ²					
	99.5	99	98	97	96	95
4 bar g	17.6	18.6	20.8	23.1	26.4	28.6
5 bar g	26.0	27.4	30.7	34.1	39.0	42.3
6 bar g	34.0	35.9	40.2	44.6	51.0	55.3
7 bar g	40.0	42.2	47.3	52.5	60.0	65.0
8 bar g	43.9	46.4	52.0	57.8	66.0	71.5
9 bar g	51.9	54.9	61.5	68.3	78.0	84.5
10 bar g	55.9	59.1	66.2	73.5	84.0	91.0
11 bar g	63.9	67.5	75.7	84.0	96.0	104
12 bar g	67.9	71.8	80.4	89.3	102.0	111
13 bar g	71.9	76.0	85.1	94.5	108.0	117

Mechanical Design Housing

Design pressure	15 bar g
Design temperature	65°C

membrane operating limits are lower

Material

Housing	Aluminum
---------	----------

Services on Request

Material certificates EN10204-3.1 on housing material (for Stainless Steel only)
3D model CAD STEP file


Weight, Dimensions and Connections

Dimensions H x Ø D	1655 x 114 mm
Weight	6.8 kg
Connection inlet / outlet	G¾ female
Vent	G1 female
Dimensional drawing	Refer to K3.1.330

Note

Parker membrane systems produce both nitrogen and oxygen enriched air. Nitrogen enriched air can cause suffocation and oxygen enriched air causes increased fire hazards. The oxygen enriched air is available at ambient pressure and pressure build-up of enriched oxygen at the outlet must be prevented, otherwise a serious (reversible) decrease in performance will result. The nitrogen enriched air produced should be treated as pressurised air.

HiFluxx DT1508

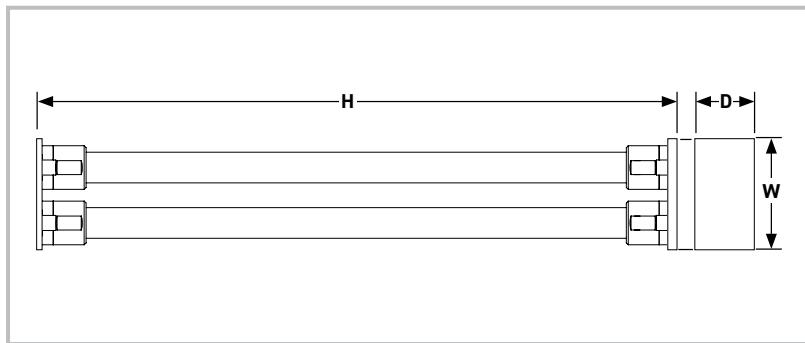

Performance data

Performance data is based on 20°C feed-air temperature and 1013 mbar ambient pressure

Performance data

Nitrogen Purity %	Minimum nitrogen ¹ flow rate in m ³ /hr ² (CFM) ²					
	99.5	99	98	97	96	95
4 bar g (58 psi g)	3.08 (1.81)	4.84 (2.85)	8.36 (4.92)	11.4 (6.71)	14.5 (8.53)	17.6 (10.4)
5 bar g (72.5 psi g)	4.55 (2.68)	7.15 (4.21)	12.4 (7.3)	16.9 (9.95)	21.5 (12.7)	26.0 (15.3)
6 bar g (87 psi g)	5.95 (3.5)	9.35 (5.5)	16.2 (9.53)	22.1 (13)	28.1 (16.5)	34.0 (20)
7 bar g (101.5 psi g)	7.00 (4.12)	11.0 (6.47)	19.0 (11.2)	26.0 (15.3)	33.0 (19.4)	40.0 (23.5)
8 bar g (116 psi g)	8.40 (4.94)	13.2 (7.77)	22.8 (13.4)	31.2 (18.4)	39.6 (23.3)	48.0 (28.3)
9 bar g (130.5 psi g)	9.80 (5.77)	15.4 (9.06)	26.6 (15.7)	36.4 (21.4)	46.2 (27.2)	56.0 (33)
10 bar g (145 psi g)	11.2 (6.59)	17.6 (10.4)	30.4 (17.9)	41.6 (24.5)	52.8 (31.1)	64.0 (37.7)
11 bar g (159.5 psi g)	12.6 (7.42)	19.8 (11.7)	34.2 (20.1)	46.8 (27.5)	59.4 (35)	72.0 (42.4)
12 bar g (174 psi g)	14.0 (8.24)	22.0 (12.9)	38.0 (22.4)	52.0 (30.6)	66.0 (38.8)	80.0 (47.1)
13 bar g (188.5 psi g)	14.7 (8.65)	23.1 (13.6)	39.9 (23.5)	54.6 (32.1)	69.3 (40.8)	84.0 (49.4)

Nitrogen Purity %	Feed-air consumption at minimum nitrogen flow rate in m ³ /hr ² (CFM) ²					
	99.5	99	98	97	96	95
4 bar g (58 psi g)	26.2 (15.4)	30.5 (18)	35.9 (21.1)	40.0 (23.5)	43.6 (25.7)	45.8 (27)
5 bar g (72.5 psi g)	38.7 (22.8)	45.0 (26.5)	53.1 (31.3)	59.2 (34.8)	64.4 (37.9)	67.6 (39.8)
6 bar g (87 psi g)	50.6 (29.8)	58.9 (34.7)	69.4 (40.8)	77.4 (45.6)	84.2 (49.6)	88.4 (52)
7 bar g (101.5 psi g)	59.5 (35)	69.3 (40.8)	81.7 (48.1)	91.0 (53.6)	99.0 (58.3)	104 (61.2)
8 bar g (116 psi g)	71.4 (42)	83.2 (49)	98.0 (57.7)	109 (64.2)	119 (70)	125 (73.6)
9 bar g (130.5 psi g)	83.3 (49)	97.0 (57.1)	114 (67.1)	127 (74.7)	139 (81.8)	146 (85.9)
10 bar g (145 psi g)	95.2 (56)	111 (65.3)	131 (77.1)	146 (85.9)	158 (93)	166 (97.7)
11 bar g (159.5 psi g)	107 (63)	125 (73.6)	147 (86.5)	164 (96.5)	178 (105)	187 (110)
12 bar g (174 psi g)	119 (70)	139 (81.8)	163 (95.9)	182 (107)	198 (117)	208 (122)
13 bar g (188.5 psi g)	125 (73.6)	146 (85.9)	172 (101)	191 (112)	208 (122)	218 (128)

Maximum pressure drop <0.8 bar (12 psi)

Maximum nitrogen flow rate = minimum flow rate + 10%.

Values between brackets are indicative imperial values

1. Parker membranes separate oxygen from pressurised air. The composition of the product is determined by measuring the residual oxygen content. The nitrogen content is calculated by subtracting the residual oxygen content from 100%. Air is composed of nitrogen (78.1%), oxygen (20.9 %), Argon (0.9 %), CO2 (0.03 %), and some trace inert gases. Therefore it should be born in mind that the value that is normally called the nitrogen content actually is the inert gas content.

2. m³/hr (CFM) refers to conditions at 1013 mbar(a) (14.7 psi a) and 20°C (68°F).

Ambient Conditions

Ambient temperature	+2°C to +50°C (+36°F to +122°F)
Ambient pressure	atmospheric
Air quality	clean air without contaminants

Feed-air Conditions

Maximum operating pressure	13.0 bar g (189 psi g)
Min. / Max. operating temperature	+2°C to +50°C (+36°F to +122°F)
Maximum oil vapour content	<0.01 mg/m ³ (<0.01 ppm (w))
Particles	filtered at 0.01 µm cut off
Relative humidity	<100% (non condensing)

Flow Rate Corrections

Nitrogen flow rate at feed temperatures other than 20°C (68°F)	Use bulletin S3.1.059*
Feed-air consumption at feed-air temperatures other than 20°C (68°F)	Use bulletin S3.1.059*

* Revision number may vary, make sure to use the most recent Revision

Mechanical Design Housing

Design pressure	13 bar g (189 psi g)
Design temperature	50°C (122°F)

Material

Housing	Aluminum
---------	----------

Services on Request

Material certificates EN10204-3.1 on housing material (for Stainless Steel only)
3D model CAD STEP file


Weight, Dimensions and Connections

Model	4 - 8 bar g (58 - 116 psi g)	9 - 13 bar g (117 - 190 psi g)
Dimensions H x W x D	1705 x 296 x 201 mm (67.1" x 11.7" x 7.9")	1705 x 296 x 145 mm (67.1" x 11.7" x 5.7")
Weight	16 kg (35.3 lb)	16 kg (35.3 lb)
Connection inlet / outlet	G¾ female to ISO 228	G¾ female to ISO 228
Vent	G1 female to ISO 228	2 x G1 female to ISO 228
Dimensional drawing	Refer to K3.1.335	Refer to K3.1.336

Note

Parker membrane systems produce both nitrogen and oxygen enriched air. Nitrogen enriched air can cause suffocation and oxygen enriched air causes increased fire hazards. The oxygen enriched air is available at ambient pressure and pressure build-up of enriched oxygen at the outlet must be prevented, otherwise a serious (reversible) decrease in performance will result. The nitrogen enriched air produced should be treated as pressurised air.

HiFluxx DT1508SS

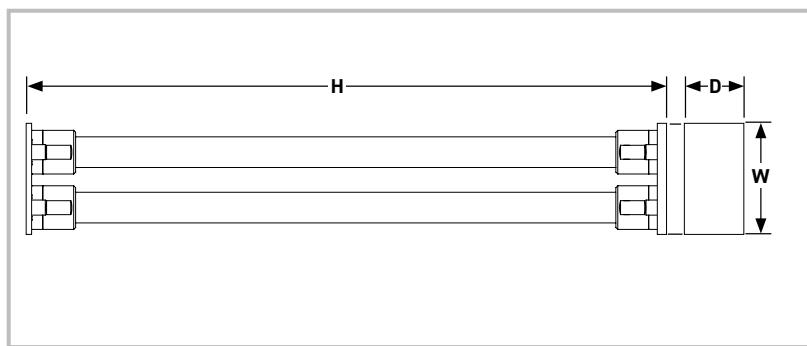

Performance data

Performance data is based on 20°C feed-air temperature and 1013 mbar ambient pressure

Purity % ¹	Minimum nitrogen flow rate in m ³ /hr ²					
	99.5	99	98	97	96	95
4 bar g	3.08	4.84	8.36	11.4	14.5	17.6
5 bar g	4.55	7.15	12.4	16.9	21.5	26.0
6 bar g	5.95	9.35	16.2	22.1	28.1	34.0
7 bar g	7.00	11.0	19.0	26.0	33.0	40.0
8 bar g	8.40	13.2	22.8	31.2	39.6	48.0
9 bar g	9.80	15.4	26.6	36.4	46.2	56.0
10 bar g	11.2	17.6	30.4	41.6	52.8	64.0
11 bar g	12.6	19.8	34.2	46.8	59.4	72.0
12 bar g	14.0	22.0	38.0	52.0	66.0	80.0
13 bar g	14.7	23.1	39.9	54.6	69.3	84.0

Maximum pressure drop <0.8 bar.

Maximum nitrogen flow rate = minimum flow rate + 10%

¹ Parker membranes separate oxygen from pressurised air. The composition of the product is determined by measuring the residual oxygen content. The nitrogen content is calculated by subtracting the residual oxygen content from 100 %. Air is composed of nitrogen (78.1%), oxygen (20.9 %), Argon (0.9 %), CO₂ (0.03 %), and some trace inert gases. Therefore it should be born in mind that the value that is normally called the nitrogen content actually is the inert gas content.

² m³/hr refers to conditions at 1013mbar(a) and 20 °C

Ambient Conditions

Ambient temperature	+2°C to +50°C
Ambient pressure	atmospheric
Air quality	clean air without contaminants

Feed-air Conditions

Maximum operating pressure	13.0 bar g
Min. / Max. operating temperature	+2°C / +50°C
Maximum oil vapour content	<0.01 mg/m ³
Particles	filtered at 0.01 µm cut off
Relative humidity	<100% (non condensing)

Flow Rate Corrections

Nitrogen flow rate at feed temperatures other than 20°C	Use bulletin S3.1.059*
Feed-air consumption at feed-air temperatures other than 20°C	Use bulletin S3.1.059*

* Revision number may vary, make sure to use the most recent Revision

Purity %	Feed-air consumption at minimum nitrogen flow rate in m ³ /hr ²					
	99.5	99	98	97	96	95
4 bar g	26.2	30.5	35.9	40.0	43.6	45.8
5 bar g	38.7	45.0	53.1	59.2	64.4	67.6
6 bar g	50.6	58.9	69.4	77.4	84.2	88.4
7 bar g	59.5	69.3	81.7	91.0	99.0	104
8 bar g	71.4	83.2	98.0	109	119	125
9 bar g	83.3	97.0	114	127	139	146
10 bar g	95.2	111	131	146	158	166
11 bar g	107	125	147	164	178	187
12 bar g	119	139	163	182	198	208
13 bar g	125	146	172	191	208	218

Mechanical Design Housing

Design pressure	15 bar g
Design temperature	65°C

membrane operating limits are lower

Material

Housing	Stainless Steel
---------	-----------------

Services on Request

Material certificates EN10204-3.1 on housing material (for Stainless Steel only)
3D model CAD STEP file


Weight, Dimensions and Connections

Model
Dimensions H x W x D (mm)
Weight
Connection inlet / outlet
Vent
Dimensional drawing

Note

Parker membrane systems produce both nitrogen and oxygen enriched air. Nitrogen enriched air can cause suffocation and oxygen enriched air causes increased fire hazards. The oxygen enriched air is available at ambient pressure and pressure build-up of enriched oxygen at the outlet must be prevented, otherwise a serious (reversible) decrease in performance will result. The nitrogen enriched air produced should be treated as pressurised air.

HiFluxx ST15020-1

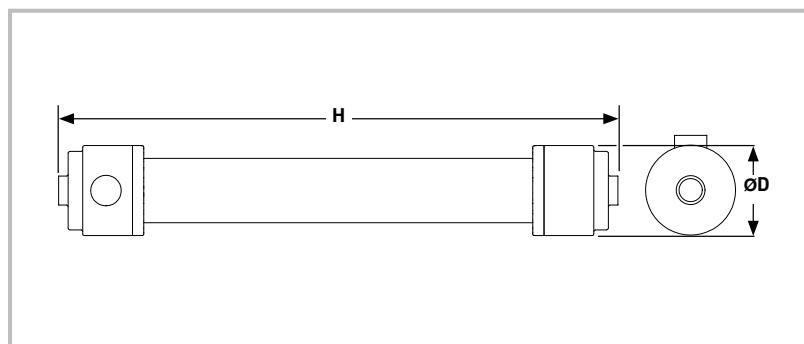

Performance data

Performance data is based on 20°C feed-air temperature and 1013 mbar ambient pressure

Purity % ¹	Typical nitrogen flow rate in m ³ /hr ²				
	99	98	97	96	95
4 bar g	24.0	39.0	53.0	71.0	89.0
5 bar g	35.0	58.0	78.0	105	131
6 bar g	46.0	75.0	103	137	171
7 bar g	54.0	89.0	121	161	201
8 bar g	59.0	97.0	133	177	221

Maximum pressure drop <0.3 bar.

1. Parker membranes separate oxygen from pressurised air. The composition of the product is determined by measuring the residual oxygen content. The nitrogen content is calculated by subtracting the residual oxygen content from 100 %. Air is composed of nitrogen (78.1%), oxygen (20.9 %), Argon (0.9 %), CO₂ (0.03 %), and some trace inert gases. Therefore it should be born in mind that the value that is normally called the nitrogen content actually is the inert gas content.

2. m³/hr refers to conditions at 1013mbar(a) and 20 °C

Above tables reflect nominal flow rates. The nitrogen output of each individual module can vary +/- 15%. For selection purposes, calculation should be done based on nominal conditions without taking the variation into account. When ordering modules, it is necessary that the total modules needed for each individual project are clearly mentioned per order-line on the order-intake-form. Parker will assure that the total output flow rate (sum of the individual selected membranes flow rates) will be minimum the total nominal flow rate. The compressor selection can be done on the total calculated nominal flow rate without taking any variation into account.

Purity %	Feed-air consumption at typical nitrogen flow rate in m ³ /hr ²				
	99	98	97	96	95
4 bar g	161	175	191	220	239
5 bar g	238	259	283	324	353
6 bar g	289	324	359	411	445
7 bar g	340	381	423	483	523
8 bar g	374	419	465	531	576

Example:

Your project requires 1515 Nm³/hr nitrogen at 8 bar g inlet pressure, 95% purity and 20°C inlet temperature. You will need 7 modules. Parker will ensure a minimum total product flow of 1515 Nm³/hr. However, individual module performance can still vary +/-15%. The compressor should be selected on a total air consumption of 7 x 576 = 4032 Nm³/hr.

Ambient Conditions

Ambient temperature	+2°C to +50°C
Ambient pressure	atmospheric
Air quality	clean air without contaminants

Feed-air Conditions

Maximum operating pressure	9.0 bar g
Min. / Max. operating temperature	+2°C / +50°C
Maximum oil vapour content	<0.01 mg/m ³
Particles	filtered at 0.01 µm cut off
Relative humidity	<100% (non condensing)

Flow Rate Corrections

Nitrogen flow rate at feed temperatures other than 20°C	Use bulletin S3.1.059*
Feed-air consumption at feed-air temperatures other than 20°C	Use bulletin S3.1.059*

* Revision number may vary, make sure to use the most recent Revision

Mechanical Design Housing

Design pressure	14 bar g
Design temperature	65°C

membrane operating limits are lower

Material

Housing	Aluminum
---------	----------

Services on Request

3D model CAD STEP file


Weight, Dimensions and Connections

Dimensions H x Ø D	1740 x 280 mm
Weight	46 kg
Connection inlet / outlet	G2½ female
Vent	100 mm OD
Dimensional drawing	K3.1.339*

Note

Parker membrane systems produce both nitrogen and oxygen enriched air. Nitrogen enriched air can cause suffocation and oxygen enriched air causes increased fire hazards. The oxygen enriched air is available at ambient pressure and pressure build-up of enriched oxygen at the outlet must be prevented, otherwise a serious (reversible) decrease in performance will result. The nitrogen enriched air produced should be treated as pressurised air.

HiFluxx ST1508SS

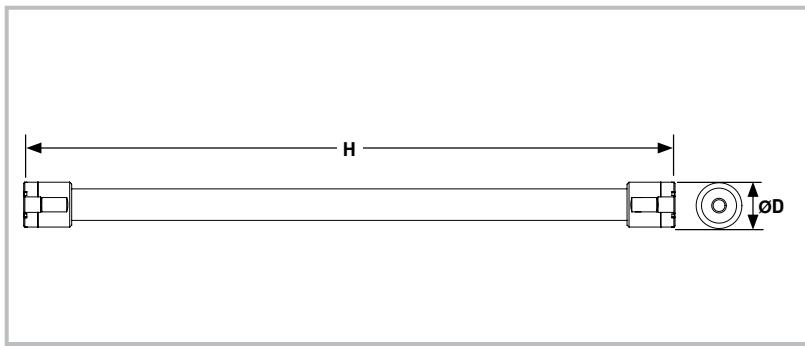

Performance data

Performance data is based on 20°C feed-air temperature and 1013 mbar ambient pressure

Purity % ¹	Minimum nitrogen flow rate in m ³ /hr ²					
	99.5	99	98	97	96	95
4 bar g	2.07	2.95	4.84	6.60	8.8	11.0
5 bar g	3.06	4.36	7.15	9.75	13.0	16.3
6 bar g	4.00	5.70	9.35	12.8	17.0	21.3
7 bar g	4.70	6.70	11.0	15.0	20.0	25.0
8 bar g	5.17	7.37	12.1	16.5	22.0	27.5
9 bar g	6.11	8.71	14.3	19.5	26.0	32.5
10 bar g	6.58	9.38	15.4	21.0	28.0	35.0
11 bar g	7.52	10.7	17.6	24.0	32.0	40.0
12 bar g	7.99	11.4	18.7	25.5	34.0	42.5
13 bar g	8.46	12.1	19.8	27.0	36.0	45.0

Purity %	Feed-air consumption at minimum nitrogen flow rate in m ³ /hr ²					
	99.5	99	98	97	96	95
4 bar g	17.6	18.6	20.8	23.1	26.4	28.6
5 bar g	26.0	27.4	30.7	34.1	39.0	42.3
6 bar g	34.0	35.9	40.2	44.6	51.0	55.3
7 bar g	40.0	42.2	47.3	52.5	60.0	65.0
8 bar g	43.9	46.4	52.0	57.8	66.0	71.5
9 bar g	51.9	54.9	61.5	68.3	78.0	84.5
10 bar g	55.9	59.1	66.2	73.5	84.0	91.0
11 bar g	63.9	67.5	75.7	84.0	96.0	104
12 bar g	67.9	71.8	80.4	89.3	102.0	111
13 bar g	71.9	76.0	85.1	94.5	108.0	117

Maximum pressure drop <0.3 bar.

Maximum nitrogen flow rate = minimum flow rate + 30%

1. Parker membranes separate oxygen from pressurised air. The composition of the product is determined by measuring the residual oxygen content. The nitrogen content is calculated by subtracting the residual oxygen content from 100 %. Air is composed of nitrogen (78.1%), oxygen (20.9 %), Argon (0.9 %), CO₂ (0.03 %), and some trace inert gases. Therefore it should be born in mind that the value that is normally called the nitrogen content actually is the inert gas content.

2. m³/hr refers to conditions at 1013mbar(a) and 20°C

Ambient Conditions

Ambient temperature	+2°C to +50°C
Ambient pressure	atmospheric
Air quality	clean air without contaminants

Mechanical Design Housing

Design pressure	15 bar g
Design temperature	65°C

membrane operating limits are lower

Material

Housing	Stainless Steel
---------	-----------------

Services on Request

Material certificates EN10204-3.1 on housing material (for Stainless Steel only)
3D model CAD STEP file

Weight, Dimensions and Connections


Dimensions H x Ø D	1654 x 114 mm
Weight	18 kg
Connection inlet / outlet	G3/4 female
Vent	G1 female
Dimensional drawing	Refer to K3.1.358

* Revision number may vary, make sure to use the most recent Revision

Note

Parker membrane systems produce both nitrogen and oxygen enriched air. Nitrogen enriched air can cause suffocation and oxygen enriched air causes increased fire hazards. The oxygen enriched air is available at ambient pressure and pressure build-up of enriched oxygen at the outlet must be prevented, otherwise a serious (reversible) decrease in performance will result. The nitrogen enriched air produced should be treated as pressurised air.

EnOxy 304

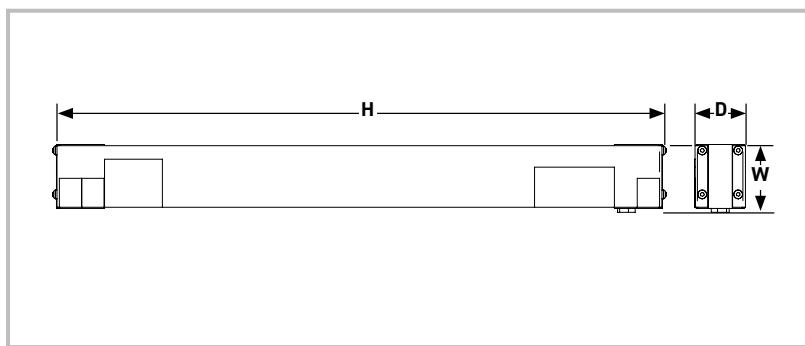

Performance data

Performance data is based on 20°C feed-air temperature and 1013 mbar ambient pressure

Purity %	Minimum enriched oxygen flow rate in l/min ¹						
	28	30	32	34	36	38	40
4 bar g	16.9	17.3	17.7	18.1	18.4	18.8	-
5 bar g	21.5	22	22.5	23.0	23.5	24.0	24.5
6 bar g	26.3	26.9	27.5	28.1	28.7	29.3	29.9
7 bar g	31.1	31.9	32.6	33.3	34.0	34.7	35.4
8 bar g	36.1	37.0	37.8	38.6	39.4	40.2	41.1
9 bar g	41.3	42.2	43.1	44.1	45.0	45.9	46.9
10 bar g	46.5	47.5	48.6	49.7	50.7	51.8	52.8
11 bar g	51.9	53	54.2	55.4	56.6	57.8	58.9
12 bar g	57.3	58.6	59.9	61.3	62.6	63.9	65.2

Enriched oxygen flow exits at atmospheric pressure

Maximum pressure drop over nitrogen enriched flow <0.3 bar.

Maximum enriched oxygen flow rate = minimum flow rate + 30%

¹ l/min refers to conditions at 1013 mbar(a) and 20°C

Ambient Conditions

Ambient temperature	+2°C to +45°C*
Ambient pressure	atmospheric
Air quality	clean air without contaminants

*Maximum inlet temperature, 35°C when operating at 13 bar g.

Purity %	Feed-air consumption at minimum enriched oxygen flow rate in l/min ¹						
	28	30	32	34	36	38	40
4 bar g	24.5	28.4	33.4	41.3	54.2	77.1	-
5 bar g	31.2	35.5	41.1	49.5	61.7	80.6	139
6 bar g	38.1	43.3	50.2	58.1	72.8	92.2	138
7 bar g	45.1	51.2	59.5	68.8	83.1	104	149
8 bar g	52.4	59.4	69.0	79.9	96.5	120	166
9 bar g	59.8	67.8	78.8	91.2	111	137	187
10 bar g	67.4	76.6	88.8	103	125	158	219
11 bar g	75.7	85.7	99.6	116	143	182	261
12 bar g	83.7	95.0	110	129	160	208	310

**Maximum inlet pressure, 10 bar g when operating at 45°C.

Feed-air Conditions

Maximum operating pressure	13 bar g**
Min. / Max. operating temperature	+2°C / +45°C*
Maximum oil vapour content	<0.01 mg/m³
Particles	filtered at 0.01 µm cut off
Relative humidity	<100% (non condensing)

*Maximum inlet temperature, 35°C when operating at 13 bar g.

**Maximum inlet pressure, 10 bar g when operating at 45°C.

Flow Rate Corrections


Nitrogen flow rate at feed temperatures other than 20°C	Use bulletin S3.1.085*
Feed-air consumption at feed-air temperatures other than 20°C	Use bulletin S3.1.085*

*Version number may vary, make sure to use the most recent version.

Note

Parker membrane systems produce both nitrogen and oxygen enriched air. Nitrogen enriched air can cause suffocation and oxygen enriched air causes increased fire hazards. The oxygen enriched air is available at ambient pressure and pressure build-up of enriched oxygen at the outlet must be prevented, otherwise a serious (reversible) decrease in performance will result. The nitrogen enriched air produced should be treated as pressurised air.

EnOxy 604

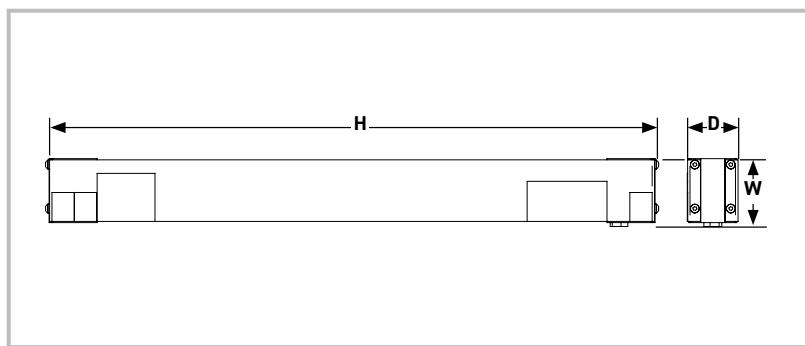

Performance data

Performance data is based on 20°C feed-air temperature and 1013 mbar ambient pressure

Oxygen purity %	Minimum enriched oxygen flow rate in l/min ¹⁾						
	28	30	32	34	36	38	40
4 bar g	35.7	36.6	37.4	38.2	39.0	39.8	-
5 bar g	45.5	46.6	47.6	48.6	49.7	50.7	51.7
6 bar g	55.6	56.8	58.1	59.3	60.6	61.9	63.1
7 bar g	65.9	67.4	68.9	70.4	71.8	73.3	74.8
8 bar g	76.4	78.1	79.9	81.6	83.4	85.1	86.8
9 bar g	87.2	89.2	91.2	93.2	95.2	97.2	99.1
10 bar g	98.3	101	103	105	107	109	112
11 bar g	110	112	115	117	120	122	125
12 bar g	121	124	127	130	132	135	138

Enriched oxygen flow exits at atmospheric pressure

Maximum pressure drop over nitrogen enriched flow <0.3 bar.

Maximum enriched oxygen flow rate = minimum flow rate + 30%

¹⁾ l/min refers to conditions at 1013mbar(a) and 20°C

Ambient Conditions

Ambient temperature	+2°C to +50°C
Ambient pressure	atmospheric
Air quality	clean air without contaminants

Feed-air Conditions

Maximum operating pressure	13.0 bar g
Min. / Max. operating temperature	+2°C / +50°C
Maximum oil vapour content	<0.01 mg/m³
Particles	filtered at 0.01 µm cut off
Relative humidity	<100% (non condensing)

Flow Rate Corrections

Nitrogen flow rate at feed temperatures other than 20°C	Use bulletin S3.1.085*
Feed-air consumption at feed-air temperatures other than 20°C	Use bulletin S3.1.085*

* version number may vary, make sure to use the most recent version

Note

Parker membrane systems produce both nitrogen and oxygen enriched air. Nitrogen enriched air can cause suffocation and oxygen enriched air causes increased fire hazards. The oxygen enriched air is available at ambient pressure and pressure build-up of enriched oxygen at the outlet must be prevented, otherwise a serious (reversible) decrease in performance will result. The nitrogen enriched air produced should be treated as pressurised air.


Material

Housing	Steel
Tube	Aluminium
Coating (housing)	ESPC to Ral 7035 (Light Grey)
Coating (tube)	None

Weight, Dimensions and Connections

Dimensions H x W x D	757 x 80 x 63 mm
Weight	3.2 kg
Connection feed-air	G ^{3/8} " female to ISO 228
Connection nitrogen enriched air	G ^{3/8} " female to ISO 228
Connection oxygen enriched air at atmospheric pressure	G ^{3/8} " female to ISO 228
Dimensional drawing	Refer to K3.1.344

EnOxy 606

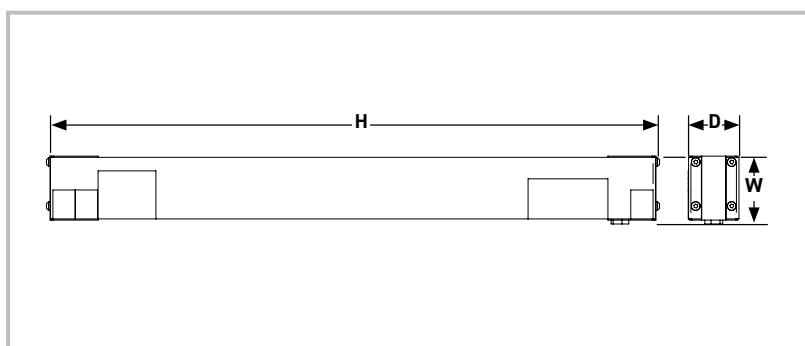

Performance data

Performance data is based on 20°C feed-air temperature and 1013 mbar ambient pressure

Oxygen purity %	Minimum enriched oxygen flow rate in l/min ¹⁾						
	28	30	32	34	36	38	40
4 bar g	69.2	70.8	72.3	74.0	75.5	77.2	-
5 bar g	88.2	90.2	92.2	94.2	96.2	98.2	100
6 bar g	108	110	113	115	118	120	122
7 bar g	128	131	133	136	139	142	145
8 bar g	148	151	155	158	162	165	168
9 bar g	168	173	177	180	185	188	192
10 bar g	190	195	198	203	208	212	217
11 bar g	212	217	222	227	232	237	242
12 bar g	235	240	245	252	257	262	267

Enriched oxygen flow exits at atmospheric pressure

Maximum pressure drop over nitrogen enriched flow <0.3 bar.

Maximum enriched oxygen flow rate = minimum flow rate + 30%

¹⁾ l/min refers to conditions at 1013mbar(a) and 20°C

Oxygen purity %	Feed-air consumption at minimum enriched oxygen flow rate in l/min ¹⁾						
	28	30	32	34	36	38	40
4 bar g	95.6	111	130	161	212	301	-
5 bar g	122	139	160	193	241	314	541
6 bar g	149	169	196	227	284	360	538
7 bar g	176	200	232	269	324	405	580
8 bar g	204	232	269	312	376	470	648
9 bar g	233	264	307	356	431	536	730
10 bar g	263	299	347	403	488	615	855
11 bar g	295	334	389	452	556	710	1018
12 bar g	327	371	430	502	623	811	1208

Ambient Conditions

Ambient temperature	+2°C to +50°C
Ambient pressure	atmospheric
Air quality	clean air without contaminants

Feed-air Conditions

Maximum operating pressure	13.0 bar g
Min. / Max. operating temperature	+2°C / +50°C
Maximum oil vapour content	<0.01 mg/m³
Particles	filtered at 0.01 µm cut off
Relative humidity	<100% (non condensing)

Flow Rate Corrections

Nitrogen flow rate at feed temperatures other than 20°C	Use bulletin S3.1.085*
Feed-air consumption at feed-air temperatures other than 20°C	Use bulletin S3.1.085*

*version number may vary, make sure to use the most recent version

Material

Housing	Steel
Tube	PVC
Coating (housing)	ESPC to RAL 7035 (Light Grey)
Coating Tube	None


Weight, Dimensions and Connections

Dimensions H x W x D	751 x 110 x 84 mm
Weight	6.4 kg
Connection feed-air	G½" female to ISO 228
Connection nitrogen enriched air	G½" female to ISO 228
Connection oxygen enriched air at atmospheric pressure	G½" female to ISO 228
Dimensional drawing	Refer to K3.1.345

Note

Parker membrane systems produce both nitrogen and oxygen enriched air. Nitrogen enriched air can cause suffocation and oxygen enriched air causes increased fire hazards. The oxygen enriched air is available at ambient pressure and pressure build-up of enriched oxygen at the outlet must be prevented, otherwise a serious (reversible) decrease in performance will result. The nitrogen enriched air produced should be treated as pressurised air.

EnOxy 608

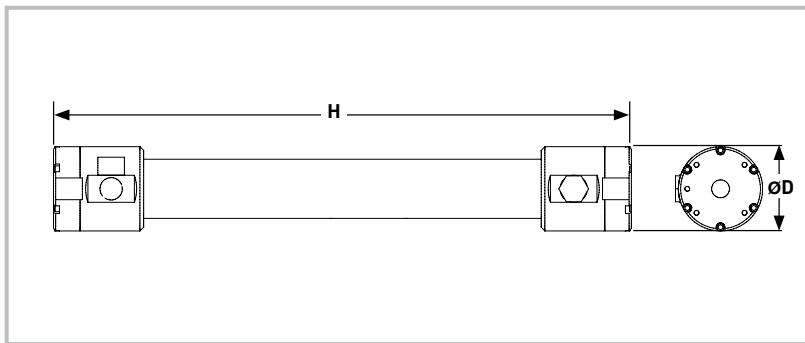

Performance data

Performance data is based on 20°C feed-air temperature and 1013 mbar ambient pressure

Oxygen purity %	Minimum enriched oxygen flow rate in l/min ¹⁾						
	28	30	32	34	36	38	40
4 bar g	128	131	134	137	140	143	-
5 bar g	163	167	170	174	178	181	185
6 bar g	199	203	207	212	216	221	225
7 bar g	235	240	246	251	256	261	267
8 bar g	273	279	285	291	297	303	309
9 bar g	311	318	325	332	339	346	353
10 bar g	351	358	366	374	382	390	397
11 bar g	391	400	408	417	426	435	443
12 bar g	432	442	452	461	471	481	490

Enriched oxygen flow exits at atmospheric pressure
Maximum pressure drop over nitrogen enriched flow <0.3 bar.
Maximum enriched oxygen flow rate = minimum flow rate + 30%

¹⁾ l/min refers to conditions at 1013mbar(a) and 20°C

Ambient Conditions

Ambient temperature	+2°C to +50°C
Ambient pressure	atmospheric
Air quality	clean air without contaminants

Feed-air Conditions

Maximum operating pressure	13.0 bar g
Min. / Max. operating temperature	+2°C / +50°C
Maximum oil vapour content	<0.01 mg/m³
Particles	filtered at 0.01 µm cut off
Relative humidity	<100% (non condensing)

Flow Rate Corrections

Nitrogen flow rate at feed temperatures other than 20°C	Use bulletin S3.1.085*
Feed-air consumption at feed-air temperatures other than 20°C	Use bulletin S3.1.085*

* version number may vary, make sure to use the most recent version

Note

Parker membrane systems produce both nitrogen and oxygen enriched air. Nitrogen enriched air can cause suffocation and oxygen enriched air causes increased fire hazards. The oxygen enriched air is available at ambient pressure and pressure build-up of enriched oxygen at the outlet must be prevented, otherwise a serious (reversible) decrease in performance will result. The nitrogen enriched air produced should be treated as pressurised air.


Material

Housing	Aluminum
---------	----------

Weight, Dimensions and Connections

Dimensions H x ø D	736 x 114 mm
Weight	5.3 kg
Connection feed-air	G ^{3/4} " female to ISO 228
Connection nitrogen enriched air	G ^{3/4} " female to ISO 228
Connection oxygen enriched air at atmospheric pressure	G1" female to ISO 228
Dimensional drawing	Refer to K3.1.346

EnOxy 6010

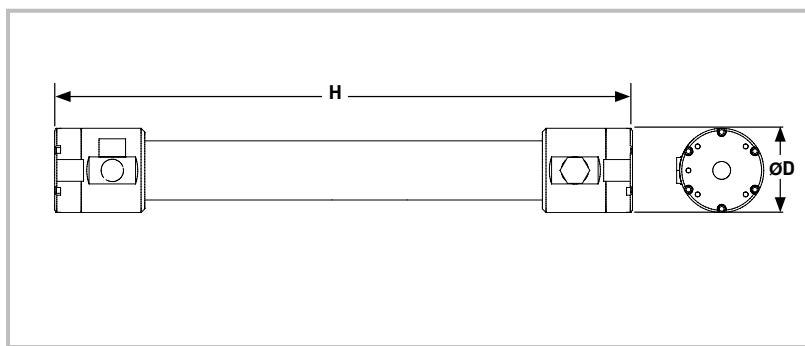

Performance data

Performance data is based on 20°C feed-air temperature and 1013 mbar ambient pressure

Oxygen purity %	Minimum enriched oxygen flow rate in l/min ¹⁾						
	28	30	32	34	36	38	40
4 bar g	250	256	262	268	274	280	-
5 bar g	318	325	333	341	348	356	364
6 bar g	387	396	406	415	425	434	443
7 bar g	458	470	481	492	503	514	525
8 bar g	532	545	558	571	584	596	609
9 bar g	607	622	637	652	666	681	696
10 bar g	685	701	718	735	751	768	784
11 bar g	764	783	801	820	838	857	875
12 bar g	846	866	887	907	928	948	969

Enriched oxygen flow exits at atmospheric pressure

Maximum pressure drop over nitrogen enriched flow <0.3 bar

Maximum enriched oxygen flow rate = minimum flow rate + 30%

¹⁾ l/min refers to conditions at 1013mbar(a) and 20°C

Ambient Conditions

Ambient temperature	+2°C to +50°C
Ambient pressure	atmospheric
Air quality	clean air without contaminants

Feed-air Conditions

Maximum operating pressure	13.0 bar g ²⁾
Min. / Max. operating temperature	+2°C / +50°C ²⁾
Maximum oil vapour content	<0.01 mg/m³
Particles	filtered at 0.01 µm cut off
Relative humidity	<100% (non condensing)

²⁾ combination of high operating pressure and high operating temperature can reduce the life time expectancy of the membrane module.

Oxygen purity %	Feed-air consumption at minimum enriched oxygen flow rate in l/min ¹⁾						
	28	30	32	34	36	38	40
4 bar g	345	401	472	585	768	1093	-
5 bar g	438	500	579	698	871	1139	1964
6 bar g	534	608	706	818	1027	1302	1950
7 bar g	633	718	836	969	1172	1465	2101
8 bar g	734	833	970	1124	1360	1700	2346
9 bar g	838	952	1108	1284	1559	1941	2644
10 bar g	945	1076	1249	1455	1765	2227	3097
11 bar g	1062	1204	1402	1632	2012	2571	3691
12 bar g	1176	1336	1552	1814	2254	2939	4385

Material

Housing	Aluminum
---------	----------

Weight, Dimensions and Connections

Dimensions H x Ø D	736 x 139 mm
Weight	8.1 kg
Connection feed-air	G 1" female to ISO 228
Connection nitrogen enriched air	G 1" female to ISO 228
Connection oxygen enriched air at atmospheric pressure	G 1" female to ISO 228
Dimensional drawing	Refer to K3.1.347

Flow Rate Corrections

Nitrogen flow rate at feed temperatures other than 20°C	Use bulletin S3.1.085*
Feed-air consumption at feed-air temperatures other than 20°C	Use bulletin S3.1.085*

* version number may vary, make sure to use the most recent version

Note

Parker membrane systems produce both nitrogen and oxygen enriched air. Nitrogen enriched air can cause suffocation and oxygen enriched air causes increased fire hazards. The oxygen enriched air is available at ambient pressure and pressure build-up of enriched oxygen at the outlet must be prevented, otherwise a serious (reversible) decrease in performance will result. The nitrogen enriched air produced should be treated as pressurised air.

Required Filtration for Parker Membrane Modules

To ensure a long life for Parker membranes modules, feed-air needs to comply with the following specifications:

Particles: filtered at 0.01 µm cut off ISO8573-1:2010 Solid Particulate class 1


Residual oil content: < 0.01 mg/m³ ISO8573-1:2010 Oil class 1

Relative humidity: < 100% (non condensing)

Air quality: clean air treated by an active carbon bed type absorber to remove solvents, hydrocarbons, ozone etc.

Generally to ISO8573.1:2010 class 1.4.1. If ambient temperature is below 8°C then a desiccant dryer is recommended.

To reach this feed-air quality the following system set-up is advised:

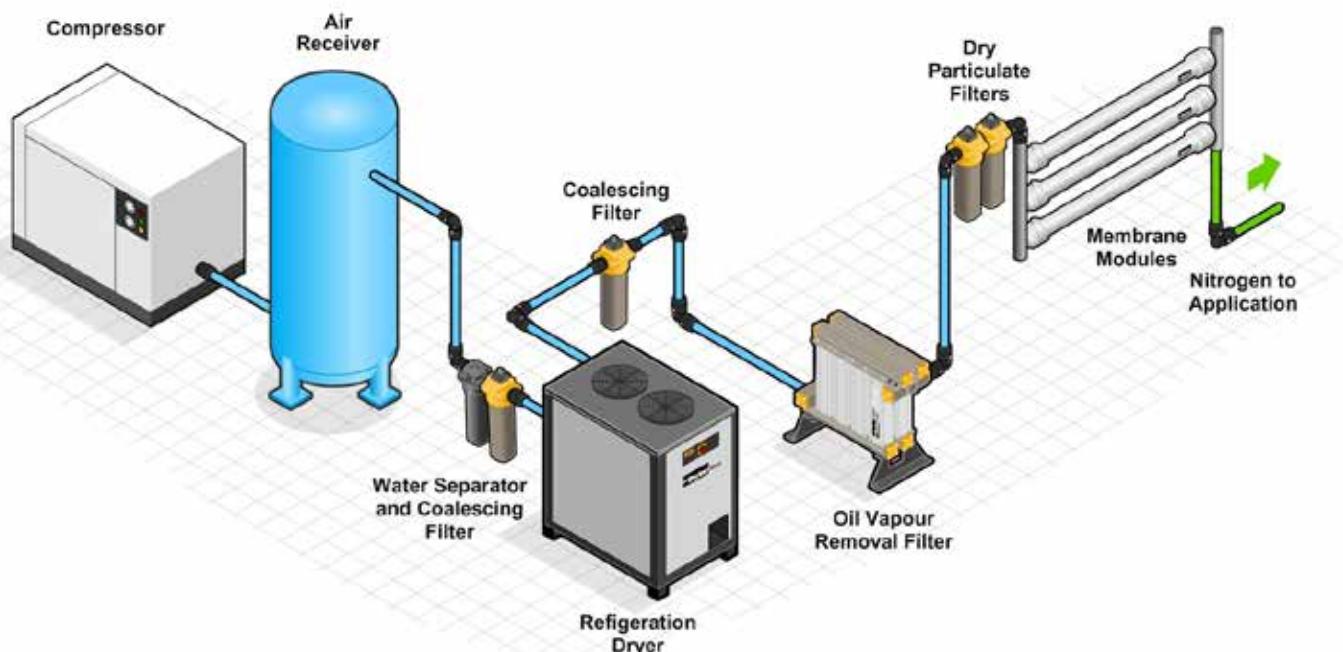

Compressor

Due to varying nitrogen or oxygen enriched-air demands, the feed-air requirements will also vary. Parker advises to use a variable speed screw compressor to get the highest efficiency and best working conditions for the compressor. At pressures of 7 to 8 barg, standard industrial screw compressors have their highest efficiency which is also the most optimal pressure with the lowest energy use for the Parker membranes modules.

Air receiver

In case a variable speed screw compressor is used, it is not necessary to use an air receiver. When a non-variable speed compressor is used with an air receiver, the receiver must be of such a size that the compressor will not switch on and off at a high frequency as this will cause increased oil carryover.

Water separator

A water separator is recommended when it is unsure whether liquid water can be carried over. The downstream coalescing filters are not designed to remove bulk water. In case that pipework between air receiver - dryer is short and pipework is indoors a water separator can be void.

Refrigerant dryer

A refrigerant dryer is sufficient to lower the dew point to an acceptable level. When a nitrogen or oxygen enriched-air system is located in an environment where the temperature cannot drop below 8°C a refrigerant dryer that creates a dew point of 3°C is sufficient. Should the feed-air temperature drop below 8°C, another drying method is required, for example an adsorption dryer. The refrigerant dryer should be sized correctly and should be equipped with sufficient condensate removal.

Filtration

To filter the feed-air to the specified quality the following filters are needed:

Coarse coalescing filter

A coarse coalescing filter for 1 Micron particles.

This filter is normally located before the refrigerant dryer or the fine coalescing filter.

Fine coalescing filter

A fine coalescing filter for 0.01 Micron particles. This filter is normally located after the refrigerant dryer or the coarse coalescing filter.

Carbon absorber, bed-type

An activated carbon absorber, bed-type filled with carbon granulates. Filters with an active carbon element are not sufficient for the protection of nitrogen membrane modules.

Dust filter

Because a carbon bed can cause dust, particulate filtration is needed. Dependent of the dust carry-over of the bed, one fine filter, or coarse and fine filter are needed, whichever is appropriate to meet the requirements.

General

All filters should be sized correctly for the application.

Maintenance and filter element change must be carried out following the applicable instructions and in line with the application.

Depending on the system requirements Parker has a wide range of compressed air pre-filtration products to select from.

Membrane Temperature Correction Factors

Temperature has influence on the performance of the Parker membranes. As the temperature changes so does the membrane performance. As a consequence the capacity and feed-air factor differ from the ones at nominal temperature (20°C).

Hereafter are the tables with correction factors for temperatures differing from 20°C for the HiFluxx/Smartfluxx and Enoxy membrane modules.

HiFluxx

Table 1

Temperature	Nitrogen flow rate correction factor for HiFluxx at various product concentrations ¹⁾					
	99.5%	99%	98%	97%	96%	95%
5°C (41°F)	0.9	0.9	0.9	0.9	0.9	0.9
10°C (50°F)	0.9	0.9	0.9	0.9	0.9	0.9
30°C (86°F)	1.0	1.0	1.0	1.0	1.0	1.0
40°C (104°F)	0.6	0.8	1.0	1.0	1.1	1.1
50°C (122°F)	0.6	0.8	1.0	1.1	1.1	1.2

Example

Sizing conditions	
Inlet pressure	7 bar _g
Nitrogen purity	97%
Feed-air temperature	50°C
N2 correction factor	1.1 (table 1)
Feed-air correction factor	1.3 (table 2)
Module	HiFluxx ST1508
N2 flow rate HiFluxx ST1508	15 m ³ /hr (at 20°C)
Feed-air consumption HiFluxx ST1508	52.5 m ³ /hr (at 20°C)

¹⁾These numbers are indicative and may vary by +/- 0.1

SmartFluxx

Table 1

Temperature	Nitrogen flow rate correction factor for SmartFluxx (SA) at various product concentrations ¹⁾					
	99.5%	99%	98%	97%	96%	95%
5°C (41°F)	-	-	0.90	0.90	0.90	0.90
10°C (50°F)	-	-	0.95	0.95	0.95	0.95
20°C (68°F)	1.00	1.00	1.00	1.00	1.00	1.00
30°C (86°F)	1.00	1.03	1.05	1.05	1.05	1.05
40°C (104°F)	1.00	1.05	1.10	1.10	1.10	1.10
50°C (122°F)	1.00	1.05	1.10	1.10	1.15	1.15
60°C (140°F)	1.10	1.15	1.20	1.20	1.25	1.20

¹⁾These numbers are indicative and may vary by +/- 0.1

Table 2

Temperature	Feed-Air consumption correction factor for HiFluxx at various product concentrations ¹⁾					
	99.5%	99%	98%	97%	96%	95%
5°C (41°F)	0.8	0.8	0.8	0.8	0.8	0.8
10°C (50°F)	0.9	0.9	0.9	0.9	0.9	0.9
30°C (86°F)	1.1	1.1	1.1	1.1	1.1	1.1
40°C (104°F)	1.2	1.2	1.2	1.2	1.2	1.2
50°C (122°F)	1.3	1.3	1.3	1.3	1.3	1.3

Corrected Nitrogen Flow Calculation at 50°C and 97%

Corrected nitrogen flow: $15 \text{ m}^3/\text{hr} \times 1.1 = 16.5 \text{ m}^3/\text{hr}$

Corrected Feed-Air Calculation at 50°C and 97%

Corrected feed-air flow: $52.5 \text{ m}^3/\text{hr} \times 1.3 = 68.3 \text{ m}^3/\text{hr}$

Table 1

Temperature	Feed-Air consumption correction factor for SmartFluxx (SA) at various product concentrations ¹⁾					
	99.5%	99%	98%	97%	96%	95%
5°C (41°F)	-	-	0.90	0.90	0.90	0.90
10°C (50°F)	-	-	0.95	0.95	0.95	0.95
20°C (68°F)	1.00	1.00	1.00	1.00	1.00	1.00
30°C (86°F)	1.10	1.10	1.10	1.10	1.10	1.10
40°C (104°F)	1.25	1.20	1.15	1.15	1.10	1.10
50°C (122°F)	1.35	1.30	1.25	1.20	1.15	1.15
60°C (140°F)	1.60	1.60	1.55	1.55	1.50	1.50

EnOxy

Table 1

Temperature	Oxygen flow rate correction factor for EnOxy at various product concentrations ¹⁾							
	28%	30%	32%	34%	36%	38%	40%	
5°C (41°F)	0.76	0.76	0.76	0.76	0.76	0.76	0.76	
10°C (50°F)	0.84	0.84	0.84	0.84	0.84	0.84	0.84	
15°C (59°F)	0.91	0.91	0.91	0.91	0.91	0.91	0.91	
25°C (77°F)	1.09	1.09	1.09	1.09	1.09	1.09	1.09	
30°C (86°F)	1.19	1.19	1.19	1.19	1.19	1.19	1.19	
35°C (95°F)	1.30	1.30	1.30	1.30	1.30	1.30	1.30	
40°C (104°F)	1.42	1.42	1.42	1.42	1.42	1.42	*	
45°C (113°F)	1.54	1.54	1.54	1.54	1.54	1.54	*	
50°C (122°F)	1.68	1.68	1.68	1.68	1.68	*	*	

¹⁾ These numbers are indicative

²⁾ No enriched oxygen can be generated at this temperature / oxygen% combination

Example

Sizing conditions	
Inlet pressure	7 barg _g
Nitrogen purity	34%
Feed-air temperature	30°C
N ₂ correction factor	1.19 (table 1)
Feed-air correction factor	1.25 (table 2)
Module	EnOxy 608
N ₂ flow rate EnOxy608	251 l/hr (at 20°C)
Feed-air consumption EnOxy608	494 l hr (at 20°C)

Table 2

Temperature	Feed-Air consumption correction factor for EnOxy at various product concentrations ¹⁾							
	28%	30%	32%	34%	36%	38%	40%	
5°C (41°F)	0.76	0.76	0.76	0.76	0.76	0.76	0.76	
10°C (50°F)	0.84	0.84	0.84	0.84	0.84	0.84	0.84	
15°C (59°F)	0.91	0.91	0.91	0.91	0.91	0.91	0.91	
25°C (77°F)	1.09	1.09	1.09	1.09	1.09	1.09	1.09	
30°C (86°F)	1.19	1.19	1.19	1.19	1.19	1.19	1.19	
35°C (95°F)	1.30	1.30	1.30	1.30	1.30	1.30	1.30	
40°C (104°F)	1.42	1.42	1.42	1.42	1.42	1.42	*	
45°C (113°F)	1.54	1.54	1.54	1.54	1.54	1.54	*	
50°C (122°F)	1.68	1.68	1.68	1.68	1.68	*	*	

Corrected Nitrogen Flow Calculation at 30°C and 34%

Corrected oxygen flow: 251 l/hr x 1.19 = 298.7 l/hr

Corrected Feed-Air Calculation at 30°C and 34%

Corrected feed-air flow: 494 l/hr x 1.25 = 617.5 l /hr

PCO2 Carbon Dioxide Quality Incident Protection Systems

From production plant to fountain / post mix and beer dispense, guaranteed CO₂ purity is assured.

The PCO2 Carbon Dioxide Quality Incident Protection System from Parker offers a comprehensive solution to preserve and guarantee the quality of gaseous carbon dioxide used in the sparkling beverage industry.


Using multi-layer gas adsorbent technology, the PCO2 range includes models for plant scale protection, as well as smaller variants for fountain / post mix and beer dispense applications respectively.

Operating as a vapour absorber to remove a wide range of potentially harmful carbon dioxide impurities, the system guarantees the gas quality to remain within industry and company guidelines, therefore preventing detrimental consequences to the finished beverage and to the producers reputation.

PCO2 quality incident production systems for production plant

The system for the production plant environment offers in-line quality incident protection against peak levels of trace impurities which may be present in beverage-grade carbon dioxide.

Typical production plant application

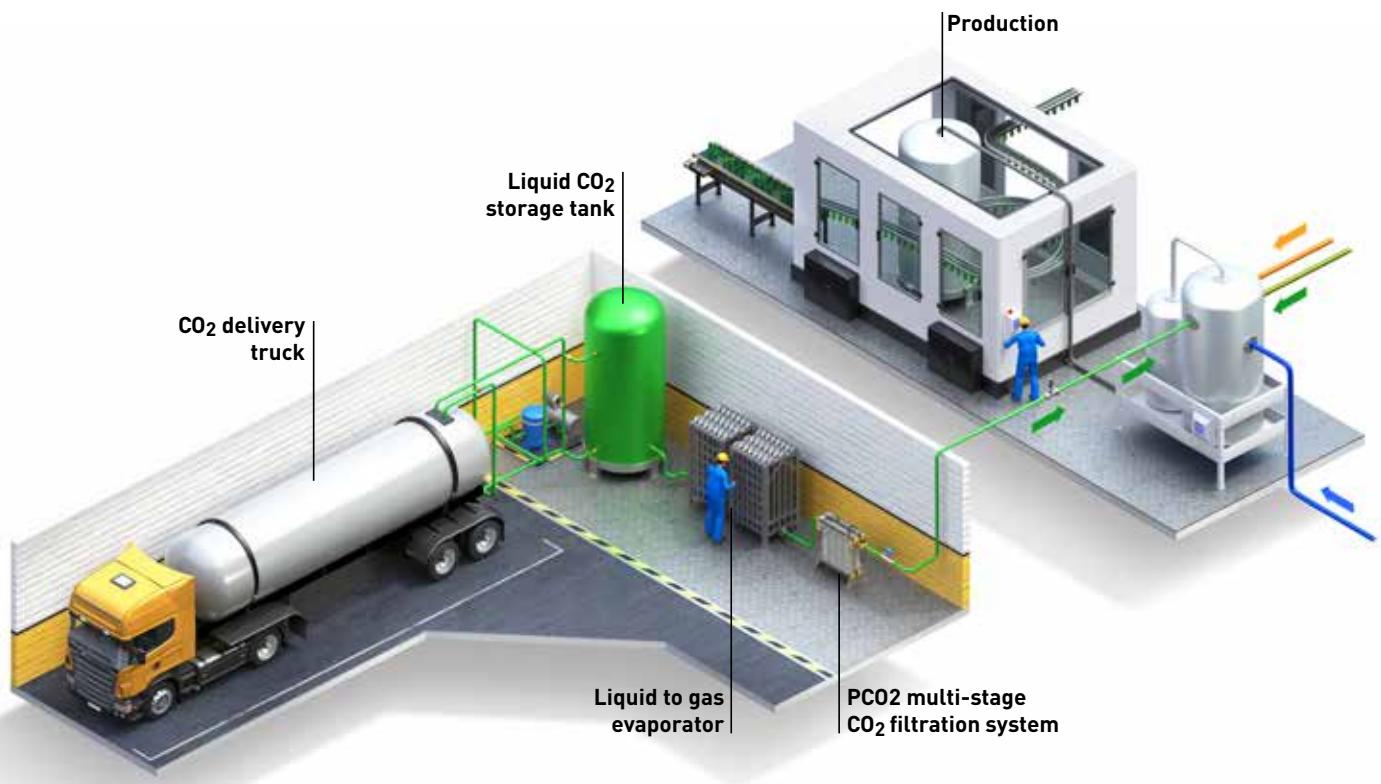

ISBT Quality Guidelines for Carbon Dioxide

The International Society of Beverage Technologists (ISBT) is the only organisation whose sole interest is the technical and scientific aspects of soft drinks and beverages.

The ISBT is a highly respected body which is dedicated to the promotion, development and dissemination of knowledge relating to the art and science of beverage technology.

The quality guidelines and analytical procedure bibliography has been developed by the ISBT to provide guidance for manufacturers of carbonated beverages and suppliers of carbon dioxide to the carbonated beverage industries about key characteristics for the quality and purity of carbon dioxide when used as a direct food additive in beverages.

The following table lists the voluntary quality standards taken from the document with relation to CO₂ quality.

Voluntary quality standards as listed in the ISBT Quality Guidelines

Parameter	Guideline	Rationale [†]
Purity:	99.9 % v/v min.	Process
Moisture:	20 ppm v/v max.	Process
Oxygen:	30 ppm v/v max.	Sensory
Carbon Monoxide:	10 ppm v/v max.	Process
Ammonia	2.5 ppm v/v max.	Process
Nitric Oxide / Nitrogen Dioxide:	2.5 ppm v/v max. (each)	Regulatory
Non-volatile Residue:	10 ppm w/w max.	Sensory
Non-volatile Organic Residue:	5 ppm w/w max.	Sensory
Phosphine:	To pass test (0.3 ppm v/v max.)	Regulatory
Total Volatile Hydrocarbons: (as Methane)	50 ppm v/v max. including 20 ppm v/v max. as total non-methane hydrocarbons	Sensory
Acetaldehyde:	0.2 ppm v/v max.	Sensory
Aromatic Hydrocarbon Content:	20 ppb v/v max.	Regulatory
Total Sulphur Content* (as S): (*Total sulphur-containing impurities excluding sulphur dioxide)	0.1 ppm v/v max.	Sensory
Sulphur Dioxide	1 ppm v/v max.	Sensory
Odour of Solid CO ₂ (snow):	No foreign odour	Sensory
Appearance in water:	No colour or turbidity	Sensory
Odour and taste in water:	No foreign odour or taste	Sensory

Source: ISBT CO₂ quality & analytical procedure bibliography, 2019.

Rationale definitions:

Sensory: Any attribute that negatively impacts the taste, appearance or odour of beverage.

Process: Any attribute that defines a key parameter in a controlled process and an important consideration in the beverage industry.

Regulatory: Any attribute whose limit is set by governing regulatory agencies.

PCO2 Carbon Dioxide Quality Incident Protection Systems

For the sparkling beverage industry

Technical Data

Model	Port Size*	Flow Rate		Quantity Required	Max Operating Pressure		Min Operating Temperature		Max Operating Temperature		Inlet CO ₂ Quality**
		Kg/h	Lb/h		bar g	psi g	°C	°F	°C	°F	
PCO2-400	1"	181	400	1	20.7	300	-20	-4	40	104	ISBT Beverage Grade CO ₂
PCO2-800	1½"	363	800	1	24.1	350	-20	-4	40	104	
PCO2-1600	1½"	726	1600	1	24.1	350	-20	-4	40	104	
PCO2-2400	1½"	1089	2400	1	24.1	350	-20	-4	40	104	
PCO2-3200	1½"	1451	3200	1	24.1	350	-20	-4	40	104	
PCO2-4000	1½"	1814	4000	1	24.1	350	-20	-4	40	104	
PCO2-4800	1½"	2177	4800	1	24.1	350	-20	-4	40	104	
PCO2-3200 Duplex*	1½"	2903	6400	2	24.1	350	-20	-4	40	104	
PCO2-4000 Duplex*	1½"	3628	8000	2	24.1	350	-20	-4	40	104	
PCO2-4800 Duplex*	1½"	4354	9600	2	24.1	350	-20	-4	40	104	

*Duplex systems are installed in parallel to double the flow.

**PCO2 CO₂ Systems are for gaseous CO₂ only.

All systems are rated at a maximum operating pressure of 24.1 bar g / 350 psi g.

PCO2-400 is rated at 20.7 Bar g / 300 psi g.

Correction Factors

Inlet Pressure	bar g	3	4	5	6	7	8	9	10	11	12	13
	psi g	44	58	73	87	102	116	130	145	160	174	189
Correction factor		0.19	0.23	0.28	0.33	0.38	0.42	0.47	0.52	0.57	0.61	0.66
Inlet Pressure	bar g	14	15	16	17	18	19	20	21	22	23	24
	psi g	203	218	232	247	261	275	290	304	319	333	348
Correction factor		0.71	0.76	0.80	0.85	0.90	0.95	1	1	1	1	1

Operation

Stage 1

0.01 micron particle filtration
Removal of non-volatile organic residue (NVOR) and other contaminants down to 0.01 ppm

Stage 2

Removal of water vapour and partial removal of hydrocarbons

Stage 3

Primary removal of aromatic hydrocarbons (Benzene, Toluene etc and Acetaldehyde)

Stage 4


Removal of sulphur compounds (COS, H₂S, DMS etc)

Stage 5


0.01 micron particle filtration

Stage 6*

Point of use VBACE sterile gas membrane. Hi Flow Tetpor II

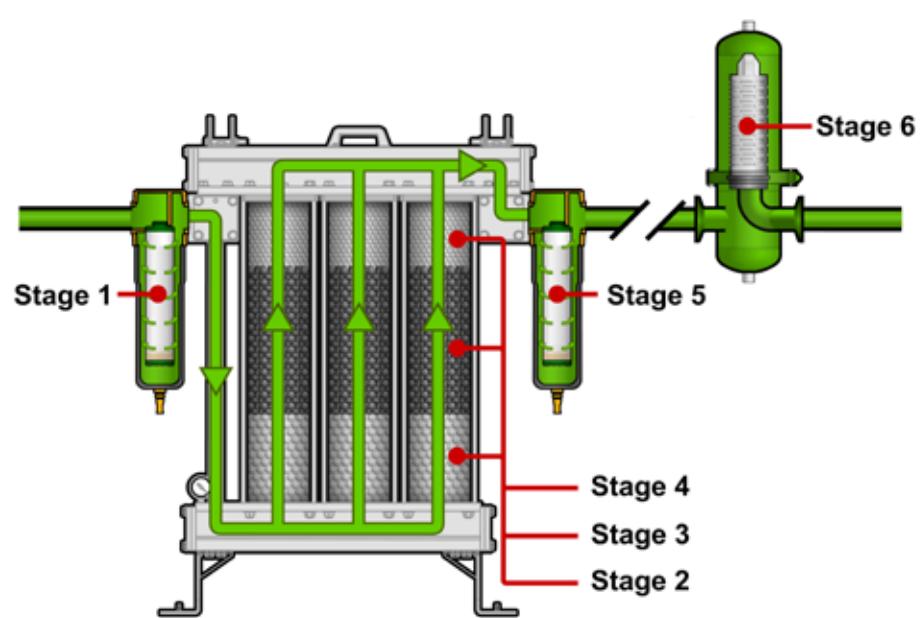

* Optional - Sterilizing Grade: consult Parker for operational use

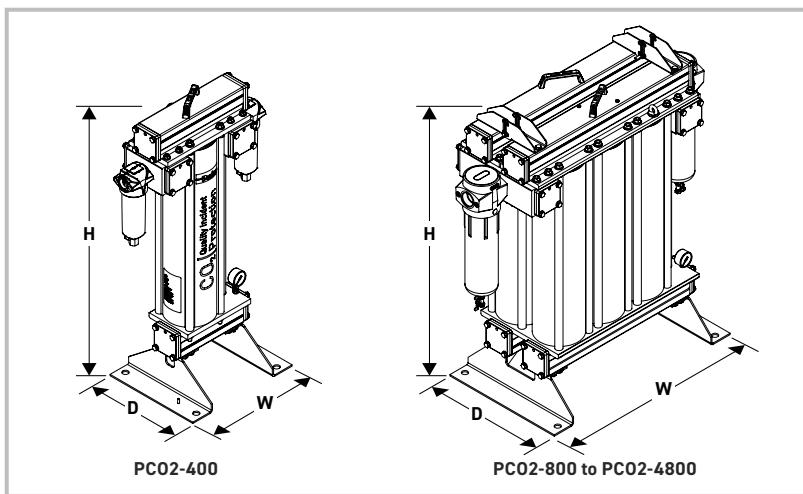

Weights and Dimensions

Model	Height (H)		Width (W)		Depth (D)		Clearance**		Weight	
	mm	ins	mm	ins	mm	ins	mm	ins	kg	lbs
PCO2-400	1035	40.8	564	22.2	350	13.7	680	27	75	165
PCO2-800	1060.7	41.8	632	24.9	450	17.7	680	27	84	185
PCO2-1600	1060.7	41.8	801	31.5	450	17.7	680	27	128	282
PCO2-2400	1060.7	41.8	970	39.4	450	17.7	680	27	172	379
PCO2-3200	1060.7	41.8	1139	44.8	450	17.7	680	27	217	478
PCO2-4000	1060.7	41.8	1308	51.5	450	17.7	680	27	260	573
PCO2-4800	1060.7	41.8	1477	58.1	450	17.7	680	27	304	670

*All systems are supplied as NPT with stainless steel adapters 'NPT to BSP' as standard.

** Clearance required for the removal and servicing of cartridges.

Preventative Maintenance Kits - Required Every 8000 Hrs (12 months)

Model	Part Number	Contents	Order Quantity
PCO2-400	MK-PCO2-400	1 x Desiccant Cartridge, 2 x Outlet Block O-Rings, 2 x P020-AA Filter Elements, 2 x IP50-AA Filter Elements, 2 x Filter Bowl O-Rings	1
PCO2-800	MK-PCO2-800	2 x Desiccant Cartridges, 2 x Outlet Block O-Rings, 2 x P035AA Filter Elements, 2 x IP50-AA Filter Elements, 2 x Filter Bowl O-Rings	1
PCO2-1600	MK-PCO2-1600	4 x Desiccant Cartridges, 2 x Outlet Block O-Rings, 2 x P035AA Filter Elements, 2 x IP50-AA Filter Elements, 2 x Filter Bowl O-Rings	1
PCO2-2400	MK-PCO2-2400	6 x Desiccant Cartridges, 2 x Outlet Block O-Rings, 2 x P035AA Filter Elements, 2 x IP50-AA Filter Elements, 2 x Filter Bowl O-Rings	1
PCO2-3200	MK-PCO2-3200	8 x Desiccant Cartridges, 2 x Outlet Block O-Rings, 2 x P035AA Filter Elements, 2 x IP50-AA Filter Elements, 2 x Filter Bowl O-Rings	1
PCO2-4000	MK-PCO2-4000	10 x Desiccant Cartridges, 2 x Outlet Block O-Rings, 2 x P035AA Filter Elements, 2 x IP50-AA Filter Elements, 2 x Filter Bowl O-Rings	1
PCO2-4800	MK-PCO2-4800	12 x Desiccant Cartridges, 2 x Outlet Block O-Rings, 2 x P035AA Filter Elements, 2 x IP50-AA Filter Elements, 2 x Filter Bowl O-Rings	1
PCO2-3200 (Duplex)	MK-PCO2-6400	16 x Desiccant Cartridges, 4 x Outlet Block O-Rings, 4 x P035AA Filter Elements, 4 x IP50-AA Filter Elements, 4 x Filter Bowl O-Rings	1
PCO2-4000 (Duplex)	MK-PCO2-8000	20 x Desiccant Cartridges, 4 x Outlet Block O-Rings, 4 x P035AA Filter Elements, 4 x IP50-AA Filter Elements, 4 x Filter Bowl O-Rings	1
PCO2-4800 (Duplex)	MK-PCO2-9600	24 x Desiccant Cartridges, 4 x Outlet Block O-Rings, 4 x P035AA Filter Elements, 4 x IP50-AA Filter Elements, 4 x Filter Bowl O-Rings	1



With OIL-X filter elements
(PCO2-400 Models only)



With OIL-X IP50 filter elements
(PCO2-800 to PCO2-4800 Models)

Biogas Dehumidification Systems

Installed on a hot galvanized steel frame (skid), a water chiller (Hyperchill BioEnergy), cooler (Hypercool BioEnergy) and a centrifugal separator (Hypersep BioEnergy) are the key components of the Biogas Dehumidification System: they have been specifically designed for biogas applications and provide safe, reliable operation in harsh environments typically found at AD and landfill biogas production sites.

The standard biogas dehumidification package includes water connections between Hyperchill and Hypercool, water isolating valves, a water expansion tank and a counter flange kit with gaskets for the system's connection to the customer's piping.

Standard Skid Package

Hyperchill BioEnergy (ICE series)

- Chiller Output 5 – 360 kW
- Special coating for corrosive environment
- Pump & tank installed in casing
- Microprocessor controlled
- Ambient range -20°C to +45°C
- Compliant scroll refrigerant compressor
- IP54 protection as standard



Hypercool BioEnergy (WFB Series)

- High cooling efficiency with low pressure drop design
- Material: Parts in contact with biogas are AISI304 or AISI316L, parts not in contact with biogas are AISI304
- Maximum working pressure: 0.5 barg



Hypersep BioEnergy (CSB Series)

- Cyclonic separator optimized for biogas applications
- High separation efficiency with very low pressure drop
- Material: Parts in contact with biogas are AISI304 or AISI316L
- Maximum working pressure: 0.5 barg



Optional Additions to Standard Skid Package

The standard Biogas Dehumidification System can be extended to include additional components such as a particulate filter, condensate drain and / or energy-saving, 'Gas2Gas' recuperator.

Hyperfilter BioEnergy (FFB)

- Particle removal: 5 or 20 µm
- Filtration efficiency 99.999%
- Differential pressure 2 mbar
- Material: AISI304 or AISI316L, with additional pickling and passivation treatment
- Maximum working pressure: 0.5 barg



Gas2Gas Recuperator BioEnergy (RBB)


- Free-cools incoming biogas to reduce chiller cooling load
- Free-heats outgoing biogas to reduce relative humidity thus eliminating the need for auxiliary heating
- High thermal transfer efficiency with very low pressure drop
- Material: AISI304 or AISI316L, with additional pickling and passivation treatment



Hyperdrain BioEnergy (HDF220BE)

- Designed to work with dirty condensate and for low pressure operation
- No electrical wiring
- No gas loss
- Parts in contact with condensate are stainless steel and reinforced polyamide, body treated with special Hiroshield treatment for optimal operation in harsh environments



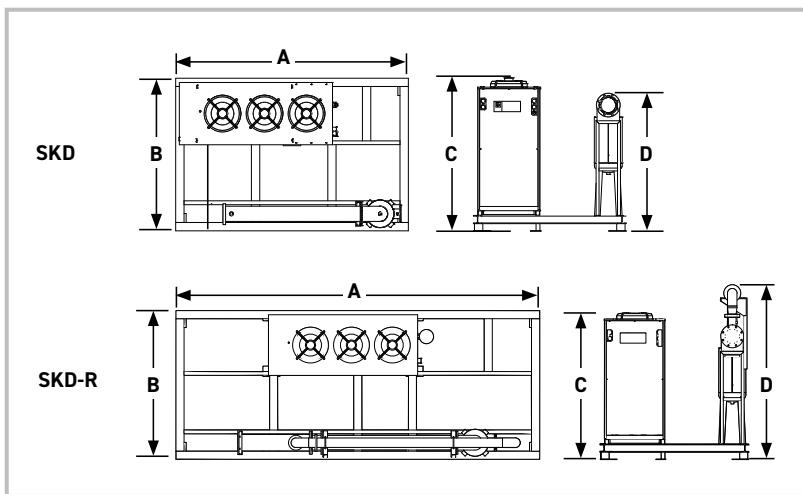

Biogas Dehumidification System

Model	Biogas Flow Rate (m³/h)	Gas Inlet Conns.	Gas Outlet Conns.	Condensate Removed (kg/h)	Dimensions								Weight*	
					A		B		C		D*			
					mm	ins	mm	ins	mm	ins	mm	ins	kg	lbs
skd60-007	60	DN80	DN50	3.1	2500	98.4	1700	66.9	1615	63.6	1640	64.6	558	1228
skd105-010	105	DN80	DN50	5.3	2500	98.4	1700	66.9	1615	63.6	1640	64.6	638	1404
skd165-014	165	DN125	DN80	8.4	2500	98.4	1700	66.9	1615	63.6	1635	64.4	690	1518
skd265-024	265	DN125	DN80	13.5	2500	98.4	1700	66.9	1615	63.6	1635	64.4	795	1749
skd240-030	240	DN125	DN80	12.8	3300	129.9	1800	70.9	1615	63.6	1695	66.7	880	1936
skd360-040	360	DN200	DN125	19.2	3300	129.9	1800	70.9	1890	74.4	1975	77.8	941	2070
skd510-060	510	DN200	DN125	27.2	3300	129.9	1800	70.9	1890	74.4	1975	77.8	1166	2565
skd720-076	720	DN200	DN125	38.4	3350	131.9	2200	86.6	2214	87.2	1995	78.5	1451	3192
skd1110-116	1110	DN300	DN200	59.2	3350	131.9	2200	86.6	2214	87.2	2102	82.8	1732	3810
skd1620-116	1350	DN300	DN200	71.6	3350	131.9	2200	86.6	2214	87.2	2102	82.8	1788	3934

Performances refer to operation with clean cooler and separator, gas flow rate at 20°C (68°F) / 1 barA. Nominal working conditions: 60% CH₄, 40% CO₂, gas inlet temperature 40°C (104°F) saturated, refrigerant inlet water temperature 1°C (34°F), ambient temperature 35°C (95°F), gas outlet temperature at nominal conditions 8°C (46°F) (from model skd60-007 to model skd265-024) and 4°C (39°F) (from model skd240-030 to model skd1620-116). Average pressure drop without filter 11 mbar +/- 2 for all models. average pressure drops with filter 14 mbar +/- 2 for all models.

*Data refers to skid without filter.

Biogas Dehumidification System with 'Gas2Gas' Recuperator

Model	Biogas Flow Rate (m³/h)	Gas Inlet Conns.	Gas Outlet Conns.	Condensate Removed (kg/h)	Dimensions								Weight*	
					A		B		C		D*			
					mm	ins	mm	ins	mm	ins	mm	ins	kg	lbs
skd60-007-R	60	DN80	DN40	3.1	3750	147.6	1700	66.9	1615	63.6	1982	78.0	703	1547
skd105-010-R	105	DN80	DN40	5.4	3750	147.6	1700	66.9	1625	64.0	1982	78.0	711	1564
skd165-014-R	165	DN125	DN50	8.5	3750	147.6	1700	66.9	1615	63.6	2040	80.3	772	1698
skd265-024-R	265	DN125	DN50	13.5	3750	147.6	1700	66.9	1615	63.6	2040	80.3	785	1727
skd240-030-R	240	DN125	DN50	12.8	4900	192.9	1800	70.9	1615	63.6	2100	82.7	1089	2396
skd360-040-R	360	DN200	DN100	19.3	4900	192.9	1800	70.9	1890	74.4	2567	101.1	1264	2781
skd510-060-R	510	DN200	DN100	27.3	4900	192.9	1800	70.9	1890	74.4	2567	101.1	1391	3060
skd720-076-R	720	DN200	DN100	38.5	5382	211.9	2200	86.6	2214	87.2	2587	101.9	1887	4151
skd1110-116-R	1110	DN350	DN150	59.4	5382	211.9	2200	86.6	2214	87.2	2878	113.3	2394	5267
skd1620-116-R	1350	DN350	DN150	68.5	5382	211.9	2200	86.6	2214	87.2	2878	113.3	2450	5390

Performances refer to operation with clean cooler and separator, gas flow rate at 20°C (68°F) / 1 barA. Nominal working conditions: 55% CH₄, 45% CO₂, gas inlet temperature 50°C (104°F) saturated, gas inlet pressure 75 mbarg, refrigerant inlet water temperature 1°C (34°F), ambient temperature 35°C (95°F), gas dew point at nominal conditions 8°C (46°F) (from model skd60-007 to model skd265-024) and 4°C (39°F) (from model skd240-030 to model skd1620-116), gas outlet relative humidity below 50%.

*Data refers to skid without filter.

BioEnergy Products

For information relating to Hyperchill BioEnergy water chillers please refer to page 96 of this catalogue.

Hyperfilter BioEnergy

Area of Application

Standard Filter	Biogas, Landfill Gas and Natural Gas
Max. Operating Pressure	0.5 bar g (7.25 psi g)
Operating Temperature	-10°C (14°F) up to 100°C (212°F)

Performance Data

Removal	Pollutants, foams, particulate and separation of residual moisture
Flow Direction	From outside to inside
Particle Removal Size	5 µm / 20 µm
Filtration Efficiency	99.999%
Differential Pressure, Dry	2 mbar

Materials of Construction - Housing

Housing Body	Stainless steel: parts in contact with biogas in AISI304 or AISI316L. not in contact in AISI304
Surface Treatment	Pickling and passivation
Gaskets	Mineral fibers with NBR binder

Materials of Construction - Element

End Caps	Stainless steel
Inner Core	Perforated stainless steel
Filter Medium	260g antistatic polyester spunbonded
Sealing	Epoxy resin
Gaskets	Neoprene

A stainless steel grounding wire is mounted underneath the top ring alongside the filter medium

Technical Data


Model	Gas Flow*				Connections		Filter Elements	
	L/S	m³/min	m³/h	cfm	In	Out	Quantity	
FFB105	29	1.8	105	62	DN50	DN80	1	
FFB265	74	4.4	265	156	DN80	DN125	1	
FFB720	200	12.0	720	424	DN125	DN200	1	
FFB1110	308	18.5	1110	653	DN200	DN300	1	
FFB3180	695	41.7	2500	1472	DN300	DN450	1	

Weights & Dimensions

Model	Dimensions								Weight	
	A		B		C		D			
	mm	ins	mm	ins	mm	ins	mm	ins	kg	lbs
FFB105	440	17.3	1454	57.2	1330	52.4	420	16.5	32	70
FFB265	440	17.3	1424	56.1	1300	51.2	390	15.4	35	77
FFB720	625	24.6	1838	72.4	1595	62.8	545	21.5	99	218
FFB1110	633	24.9	1883	74.1	1650	65.0	600	23.6	108	238
FFB3180	1000	39.4	2208	86.9	1805	71.1	696	27.4	255	561

*Nominal working conditions: gas inlet temperature 40°C (104°F), atmospheric pressure, 60%CH₄, 40%CO₂, pressure drop 3 mbar.

FFB Filters can work at higher gas flow rates with an increase in pressure drop (refer to Parker).

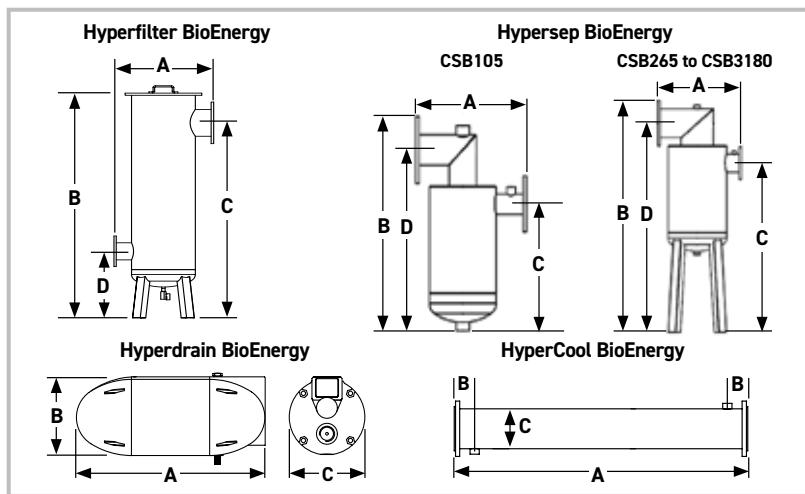

Hypersep BioEnergy

Technical Data / Weights & Dimensions

Model	Gas Flow				Connections		Dimensions								Weight	
	L/s	m³/h	m³/min	cfm	In	Out	mm	ins	mm	ins	mm	ins	mm	ins	kg	lbs
CSB105	29	105	1.8	62	DN80	DN50	365.5	14.4	635.5	25.0	375.8	14.8	535.5	21.1	14	31
CSB265	74	265	4.4	156	DN125	DN80	460	18.1	1425	56.1	1038	40.9	1300	51.2	30	66
CSB720	200	720	12.0	424	DN200	DN125	570	22.4	1765	69.5	1293	50.9	1595	62.8	54	119
CSB1620	450	1620	27.0	954	DN300	DN200	638	25.1	1747.5	68.8	1156	45.5	1525	60.0	88	194
CSB3180	883	3180	53.0	1872	DN450	DN300	833	32.8	2113	83.2	1264	49.8	1805	71.1	153	337

Hypercool BioEnergy

Technical Data / Weights & Dimensions

Model	Gas Flow				Connections		Dimensions								Weight	
	L/s	m³/h	m³/min	cfm	Gas	Water	mm	ins	mm	ins	mm	ins	mm	ins	kg	lbs
WFB60	17	60	1.0	35	DN80	¾"	1490	58.7	65.5	2.6	89	3.5	16	35		
WFB105	29	105	1.8	62	DN80	¾"	1490	58.7	65.5	2.6	89	3.5	19	42		
WFB165	46	165	2.8	97	DN125	1"	1490	58.7	100.5	4.0	140	5.5	30	66		
WFB265	74	265	4.4	156	DN125	1"	1490	58.7	100.5	4.0	140	5.5	38	84		
WFB240	67	240	4.0	141	DN125	1"	1990	78.3	100.5	4.0	140	5.5	48	106		
WFB360	100	360	6.0	212	DN200	1¼"	1990	78.3	120.5	4.7	219	8.6	85	187		
WFB510	142	510	8.5	300	DN200	1¼"	1990	78.3	120.5	4.7	219	8.6	102	224		
WFB720	200	720	12.0	424	DN200	1¼"	1990	78.3	120.5	4.7	219	8.6	124	273		
WFB1110	308	1110	18.5	653	DN300	2"	1990	78.3	144.5	5.7	324	12.8	196	431		
WFB1620	450	1620	27.0	954	DN300	2"	1990	78.3	144.5	5.7	324	12.8	252	554		
WFB2380	661	2380	39.7	1401	DN450	2½"	1990	78.3	179.5	7.1	457	18.0	405	891		
WFB3180	883	3180	53.0	1872	DN450	2½"	1990	78.3	179.5	7.1	457	18.0	490	1078		

Performances refer to models operating with gas flow rate at FAD 20°C (68°F) / 1 barA.

Nominal working conditions: gas inlet conditions 40°C (104°F) saturated 60%CH₄, 40%CO₂, water inlet temperature 1°C (34°F), gas outlet temperature 8°C (46°F) for models WFB60, WFB105, WFB165, WFB265, 4°C (39°F) for all other models. pressure drop 1.2 kPa with separator.

Hyperdrain BioEnergy

Technical Data / Weights & Dimensions

Model	Materials of Construction			Gas Flow				Conns.		Maximum Pressure	Dimensions						Weight		
	Housing	Float	Lever	L/s	m³/h	m³/min	cfm	in	out	bar g	psi g	mm	ins	mm	ins	mm	ins	kg	lbs
HDF220BE	Aluminium	Polyamide/ st. steel	Polyamide/ st. steel	2	6.5	108	4	1"	½"	1	14.5	266	10.5	111	4.4	108	4.3	1.9	4

Replacement Filter Elements and Maintenance Kits

For Legacy Parker domnick hunter Products



**OIL-X EVOLUTION
Elements**

Filter Model	Replacement Element
AO005	005AO
AO010	010AO
AO015	015AO
AO020	020AO
AO025	025AO
AO030	030AO
AO035	035AO
AO040	040AO
AO045	045AO
AO050	050AO
AO055	055AO
AO060	060AO requires 3 per filter
AA005	005AA
AA010	010AA
AA015	015AA
AA020	020AA
AA025	025AA
AA030	030AA
AA035	035AA
AA040	040AA
AA045	045AA
AA050	050AA
AA055	055AA
AA060	060AA requires 3 per filter
ACS005	005ACS
ACS010	010ACS
ACS015	015ACS
ACS020	020ACS
ACS025	025ACS
ACS030	030ACS
ACS035	035ACS
ACS040	040ACS
ACS045	045ACS
ACS050	050ACS
ACS055	055ACS
ACS060	060ACS requires 3 per filter

**OIL-X EVOLUTION
Combination Elements**

Filter Model	Replacement Elements
AC010	010AA 010AC
AC015	015AA 015AC
AC020	020AA 020AC
AC025D	025AA 025DAC
AC025E	025AA 025EAC
AC030	030AA 030AC

**OIL-Xplus
Advantage Elements**



**OIL-X EVOLUTION
OVR Maintenance Kits**

Model	Maintenance Kit	No. Required
OVR100E	100OVR	1
OVR150H	100OVR	2
OVR200H	100OVR	4
OVR250J	100OVR	6



**OIL-Xplus
Combination Elements**

Filter Model	Replacement Elements
AC-0006G	K009AA K006AC
AC-0013G	K017AA K013AC
AC-0025G	K030AA K025AC
AC-0040G	K058AA K040AC
AC-0065G	K145AA K065AC
AC-0085G	K145AA K085AC



Filter Model **Replacement Element**

AO-0003G	K003AO
AO-0009G	K009AO
AO-0017G	K017AO
AO-0030G	K030AO
AO-0058G	K058AO
AO-0080G	K145AO
AO-0125G	K145AO
AO-0145G	K145AO
AO-0205G	K220AO
AO-0220G	K220AO
AO-0330G	K330AO
AO-0405G	K430AO
AO-0430G	K430AO
AO-0620G	K620AO
AO-1000G	K330AO requires 3 per filter
AA-0003G	K003AA
AA-0009G	K009AA
AA-0017G	K017AA
AA-0030G	K030AA
AA-0058G	K058AA
AA-0080G	K145AA
AA-0125G	K145AA
AA-0145G	K145AA
AA-0205G	K220AA
AA-0220G	K220AA
AA-0330G	K330AA
AA-0405G	K430AA
AA-0430G	K430AA
AA-0620G	K620AA
AA-1000G	K330AA requires 3 per filter
ACS-0009G	K009ACS
ACS-0017G	K017ACS
ACS-0030G	K030ACS
ACS-0058G	K058ACS
ACS-0080G	K145ACS
ACS-0125G	K145ACS
ACS-0145G	K145ACS
ACS-0205G	K220ACS
ACS-0220G	K220ACS
ACS-0330G	K330ACS
ACS-0405G	K430ACS
ACS-0430G	K430ACS
ACS-0620G	K620ACS
ACS-1000G	K330ACS requires 3 per filter

OIL-X EVOLUTION Multi-box Elements



Model / Housing	Part Number	Box Quantity
AO010	P010AOX25	25
AA010	P010AAX25	25
ACS010	P010ACSX25	25
AO015	P015AOX25	25
AA015	P015AAX25	25
ACS015	P015ACSX25	25
AO020	P020AOX25	25
AA020	P020AAX25	25
ACS020	P020ACSX25	25
AO25	P025AOX12	12
AA025	P025AAX12	12
ACS025	P025ACSX12	12
AO030	P030AOX12	12
AA030	P030AAX12	12
ACS030	P030ACSX12	12

SE and ES Oil / Water Separator Maintenance Kits



Model	Quantity Required	Part Number
SE2010	1	ESMK1
SE2015	1	ESMK1
SE2030/SE2030P	2	ESMK1
ES36	1	ESMK1
ES90	1	ESMK1
ES125	1	ESMK2
ES250	2	ESMK2
ES500	1	ESMK3
ES1000	2	ESMK3

PCO2 MKI Maintenance Kits



Product Type	Model	Filter Type	Maintenance Kit
Maxi PCO2	PCO2-1-20 (300)	OIL-Xplus	MAKPCO2-1-20
Maxi PCO2	PCO2-2-20 (300)	OIL-Xplus	MAKPCO2-2-20
Maxi PCO2	PCO2-3-20 (300)	OIL-Xplus	MAKPCO2-3-20
Maxi PCO2	MPlus 4000 20 (300)	OIL-Xplus	MAK-MPLUS4000-20
Maxi PCO2	MPlus 6000 20 (300)	OIL-Xplus	MAK-MPLUS6000-20
Maxi PCO2	MPlus 8000 20 (300)	OIL-Xplus	MAK-MPLUS8000-20
Maxi PCO2	MPlus 10000 20 (300)	OIL-Xplus	MAK-MPLUS10000-20
Mplus PCO2	PCO2-0-20 (300)	OIL-X EVOLUTION	MAKEPCO2-0-20
Mplus PCO2	PCO2-1-20 (300)	OIL-X EVOLUTION	MAKEPCO2-1-20
Mplus PCO2	PCO2-2-20 (300)	OIL-X EVOLUTION	MAKEPCO2-2-20
Mplus PCO2	PCO2-3-20 (300)	OIL-X EVOLUTION	MAKEPCO2-3-20
Mplus PCO2	MPlus 4000 20 (300)	OIL-X EVOLUTION	MAKE-MPLUS4000-20
Mplus PCO2	MPlus 6000 20 (300)	OIL-X EVOLUTION	MAKE-MPLUS6000-20
Mplus PCO2	MPlus 8000 20 (300)	OIL-X EVOLUTION	MAKE-MPLUS8000-20
Mplus PCO2	MPlus 10000 20 (300)	OIL-X EVOLUTION	MAKE-MPLUS10000-20
Maxi PCO2	PCO2-0-24 (350)	OIL-Xplus	MAKPCO2-0-24
Maxi PCO2	PCO2-1-24 (350)	OIL-Xplus	MAKPCO2-1-24
Maxi PCO2	PCO2-2-24 (350)	OIL-Xplus	MAKPCO2-2-24
Maxi PCO2	PCO2-3-24 (350)	OIL-Xplus	MAKPCO2-3-24
Maxi PCO2	MPlus 4000 24 (350)	OIL-Xplus	MAK-MPLUS4000-24
Maxi PCO2	MPlus 6000 24 (350)	OIL-Xplus	MAK-MPLUS6000-24
Maxi PCO2	MPlus 8000 24 (350)	OIL-Xplus	MAK-MPLUS8000-24
Maxi PCO2	MPlus 10000 24 (350)	OIL-Xplus	MAK-MPLUS10000-20

Replacement Filter Elements

For Legacy Parker Zander Products

G Elements

Filter Model	Replacement Element
GH2A	1030A
GH2V	1030ZP
GH2XP	1030XP
G2ZP	1030ZP
G3A	1050A
G3V	1050ZP
G3XP	1050XP
G3ZP	1050ZP
G5A	1070A
G5V	1070ZP
G5XP	1070XP
G5ZP	1070ZP
G7A	1140A
G7V	1140ZP
G7XP	1140XP
G7ZP	1140ZP
G9A	2010A
G9V	2010ZP
G9XP	2010XP
G9ZP	2010ZP
G11A	2020A
G11V	2020ZP
G11XP	2020XP
G11ZP	2020ZP
G12A	2030A
G12V	2030ZP
G12XP	2030XP
G12ZP	2030ZP
G13A	2050A
G13V	2050ZP
G13XP	2050XP
G13ZP	2050ZP
G14A	3050A
G14V	3050ZP
G14XP	3050XP
G14ZP	3050ZP
G17A	3075A
G17V	3075ZP
G17XP	3075XP
G17ZP	3075ZP
G18A	5060A
G18V	5060ZP
G18XP	5060XP
G18ZP	5060ZP
G19A	5075A
G19V	5075ZP
G19XP	5075XP
G19ZP	5075ZP

GL and GL Plus Elements



LV Series Paint Compatible



Filter Model	Replacement Element
GL2A / GL2AP	CP1008A
GL2VL	CP1008ZL
GL2ZL / GL2ZLP	CP1008ZL
GL2XL / GL2XLP	CP1008XL
GL3A / GL3AP	CP2010A
GL3VL	CP2010ZL
GL3ZL / GL3ZLP	CP2010ZL
GL3XL / GL3XLP	CP2010XL
GL7A / GL7AP	CP2020A
GL7VL	CP2020ZL
GL7ZL / GL7ZLP	CP2020ZL
GL7XL / GL7XLP	CP2020XL
GL9A / GL9AP	CP3025A
GL9VL	CP3025ZL
GL9ZL / GL9ZLP	CP3025ZL
GL9XL / GL9XLP	CP3025XL
GL11A / GL11AP	CP3040A
GL11VL	CP3040ZL
GL11ZL / GL11ZLP	CP3040ZL
GL11XL / GL11XLP	CP3040XL
GL12A / GL12AP	CP4040A
GL12VL	CP4040ZL
GL12ZL / GL12ZLP	CP4040ZL
GL12XL / GL12XLP	CP4040XL
GL13A / GL13AP	CP4050A
GL13VL	CP4050VL
GL13ZL / GL13ZLP	CP4050ZL
GL13XL / GL13XLP	CP4050XL
GL14A / GL14AP	CP4065A
GL14VL	CP4065ZL
GL14ZL / GL14ZLP	CP4065ZL
GL14XL / GL14XLP	CP4065XL
GL17A / GL17AP	CP5065A
GL17VL	CP5065ZL
GL17ZL / GL17ZLP	CP5065ZL
GL17XL / GL17XLP	CP5065XL
GL19A / GL19AP	CP5080A
GL19VL	CP5080ZL
GL19ZL / GL19ZLP	CP5080ZL
GL19XL / GL19XLP	CP5080XL

Filter Model	Part Number
G2A/LV	1030A/LV
G2XPH/LV	1030XP/LV
G2ZPH/LV	1030ZP/LV
G3A/LV	1050A/LV
G3XPDH/LV	1050XP/LV
G3ZPDH/LV	1050ZP/LV
G5A/LV	1070A/LV
G5XPDH/LV	1070XP/LV
G5ZPDH/LV	1070ZP/LV
G7A/LV	1140A/LV
G7XPDH/LV	1140XP/LV
G7ZPDH/LV	1140ZP/LV
G9A/LV	2010A/LV
G9XPDH/LV	2010XP/LV
G9ZPDH/LV	2010ZP/LV

www.parker.com/gsfe



European Headquarters
La Tuilière 6, 1163 Etoy,
Switzerland
Tel: +41 21 821 85 00

EMEA Product Information Centre
Free phone: 00 800 27 27 5374
(from AT, BE, CH, CZ, DE, DK, EE, ES, FI, FR, IE, IL,
IS, IT, LU, MT, NL, NO, PL, PT, RU, SE, SK, UK, ZA)
US Product Information Centre
Toll-free number: 1-800-27 27 537